


## SolidMatrix® Surface Mount Fuses

### HA Series (High Current), 1206 Size

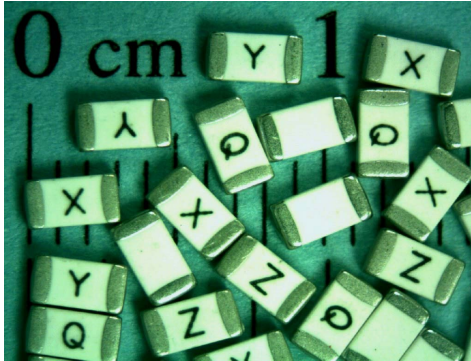

#### Features:

- Special products for high current rating applications
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Superior arc suppression capability
- High current ratings
- Symmetrical design with marking on both sides (optional)
- Operating temperature range: -55°C to 125°C (with de-rating)

#### Clearing Time Characteristics:

% of current rating	Clearing time at 25°C
100%	4 hours min.
250%	5 seconds max.

#### Agency Approval:


Recognized Under the Components Program of UL.  
File Number: E232989.

#### Patents:

Patent numbers "US6,034,589", "US6,602,766", "US6,844,278", "ZL00134544.3", "ZL02114719.1", "ZL200810130656.X", "ZL201020551360.8", "ZL201010299185.2", "ZL201220030614.0", "ZL201210020693.1".

#### Shape and Dimensions:

Unit	Inch	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.038 ± 0.008	0.97 ± 0.20
B	0.020 ± 0.010	0.51 ± 0.25




#### Ordering Information:

Part Number	Current Rating (A)	Voltage Rating (VDC)	Interrupting Ratings	Nominal Cold DCR(Ω) <sup>1</sup>	Nominal I <sup>2</sup> t (A <sup>2</sup> s) <sup>2</sup>	Marking (Optional) <sup>3</sup>
F1206HA10V024T	10	24	100 A at rated voltage	0.010	9	Q
F1206HA12V024T	12	24		0.008	14	X
F1206HA15V024T	15	24		0.005	26	Y
F1206HA20V024T	20	24		0.003	56	Z

1. Measured at ≤ 10% rated current and 25°C ambient.
2. Melting I<sup>2</sup>t at 0.001 second pre-arcing time.
3. Black Marking Character Code.


**SolidMatrix® Surface Mount Fuses**  
**HA Series (High Current), 1206 Size**

**Average Pre-arcing Time Curves:**

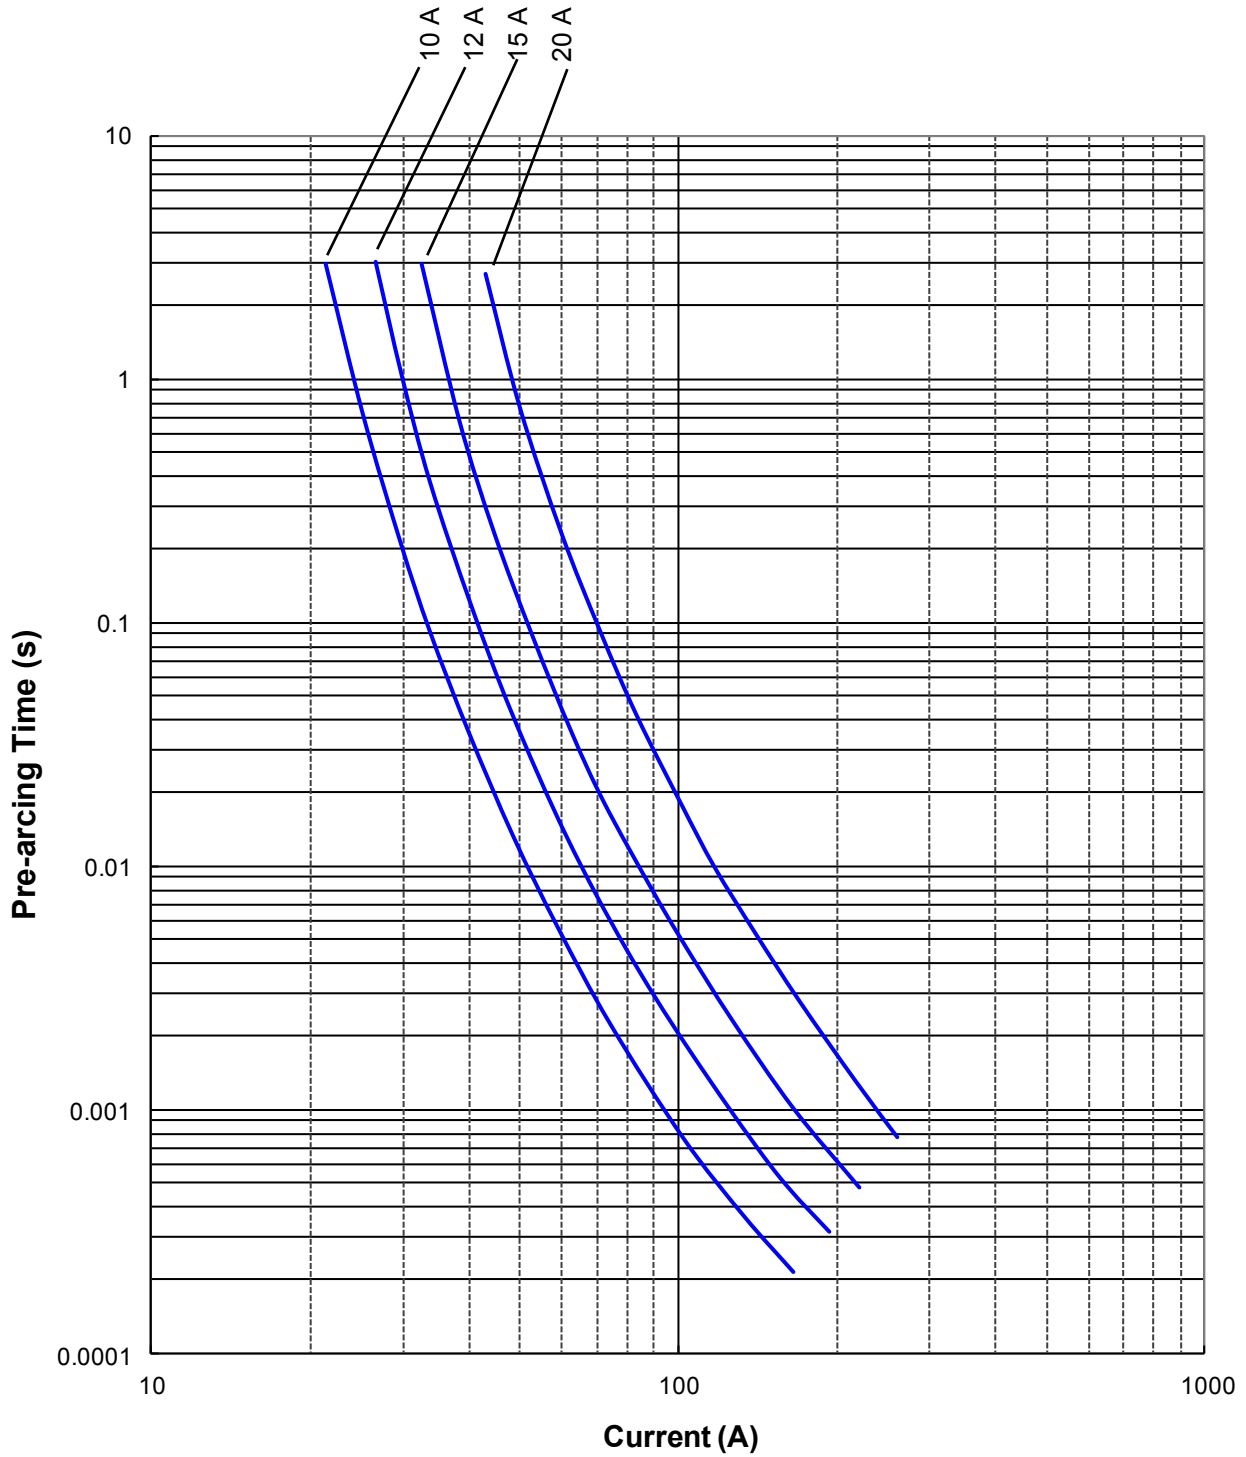

**SolidMatrix<sup>®</sup> Surface Mount Fuses**  
**HA Series (High Current), 1206 Size**

**Average I<sup>2</sup>t vs. t Curves:**

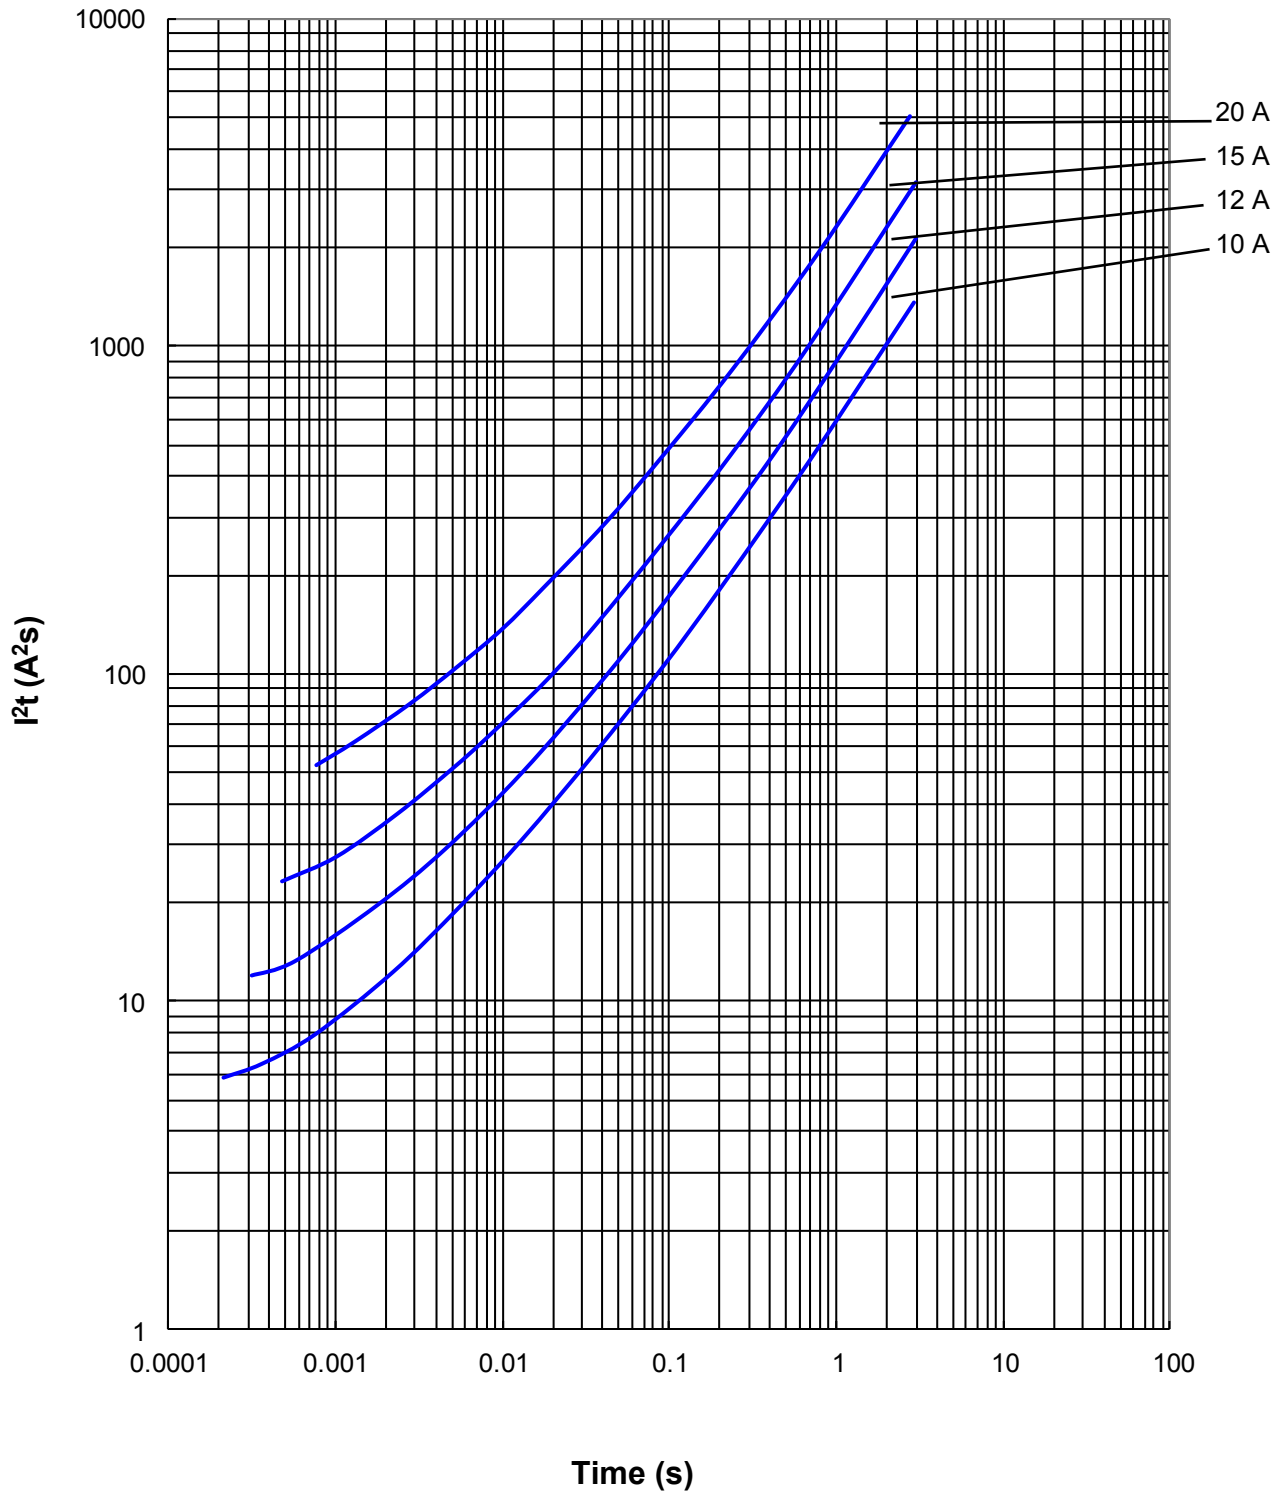

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AEM:](#)

[F1206HA10V024T](#) [F1206HA12V024T](#) [F1206HA15V024T](#) [F1206HA20V024T](#) [F1206HA15V024TM](#)  
[F1206HA20V024TM](#) [F1206HA12V024TM](#) [F1206HA10V024TM](#)