




features

- Monolithic structure provides high reliability in a wide temperature and humidity range
- High quality ceramic material and unique manufacturing process provides high Q at high frequency
- Nickel barrier with solder overcoat for excellent solderability
- Products with lead-free terminations meet EU RoHS requirements

dimensions and construction

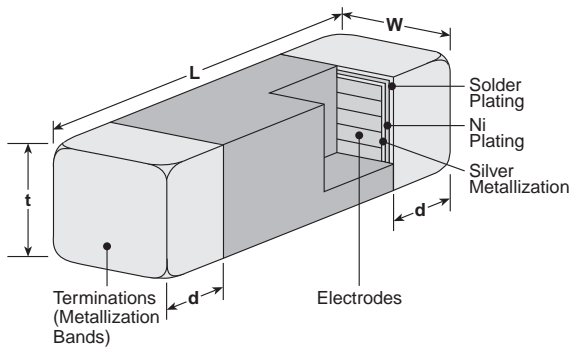

Size Code	Dimensions inches (mm)			
	L	W	t	d
1E (0402)	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.01±.004 (0.25±0.1)
1J (0603)	.063±.006 (1.6±0.15)	.031±.006 (0.8±0.15)	.031±.006 (0.8±0.15)	.012±.008 (0.3±0.20)

Inductors

ordering information

MHL	1E	C	T	TP	3N9	S
Type	Size Code	Material	Termination Material	Packaging	Nominal Inductance	Tolerance
	1E 1J	Permeability Code: C	T: Sn	TP: 7" paper tape 2 mm pitch (1E only - 10,000 pieces/reel) TD: 7" paper tape (1J - 4,000 pieces/reel)	3N9 = 3.9nH R10 = 100nH	S: ±0.3nH J: ±5%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Inductance L (nH)	Inductance Tolerance	Q Minimum (100MHz)	Self Resonant Frequency Typical (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range**	
MHL1ECTTP1N0*	1.0	S: ±0.3nH	8	10000	0.12	300	-55°C to +125°C	
MHL1ECTTP1N2*	1.2							
MHL1ECTTP2N2*	2.2							
MHL1ECTTP3N3*	3.3			4000	6000			0.16
MHL1ECTTP3N9*	3.9							
MHL1ECTTP4N7*	4.7							
MHL1ECTTP5N6*	5.6							

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

applications and ratings (continued)

Part Designation	Inductance L (nH)	Inductance Tolerance	Q Minimum (100MHz)	Self Resonant Frequency Typical (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Operating Temperature Range**					
MHL1ECTTP6N8*	6.8	J: \pm 5%	8	3900	0.32	300	-55°C to +125°C					
MHL1ECTTP8N2*	8.2			3500	0.37							
MHL1ECTTP10N*	10			3200	0.42							
MHL1ECTTP12N*	12			2600	0.50							
MHL1ECTTP15N*	15			2300	0.55							
MHL1ECTTP18N*	18			2000	0.65							
MHL1ECTTP22N*	22			1600	0.8	200						
MHL1ECTTP27N*	27			1400	0.9							
MHL1ECTTP39N*	39			1100	1.2	100						
MHL1ECTTP47N*	47			900	1.3							
MHL1ECTTP56N*	56			750	1.4							
MHL1ECTTP82N*	82			600	1.6							
MHL1ECTTPR10*	100			600	2.0							
MHL1JCTTD1N5*	1.5			S: \pm 0.3nH	8	6000		0.10	600	-55°C to +125°C		
MHL1JCTTD1N8*	1.8											
MHL1JCTTD2N2*	2.2											
MHL1JCTTD2N7*	2.7											
MHL1JCTTD3N3*	3.3	10	5200				0.13					
MHL1JCTTD3N9*	3.9		5000				0.15					
MHL1JCTTD4N7*	4.7		4000				0.20					
MHL1JCTTD5N6*	5.6		4000				0.23					
MHL1JCTTD6N8*	6.8	J: \pm 5%	12				3500				0.28	600
MHL1JCTTD8N2*	8.2						3200				0.30	
MHL1JCTTD10N*	10			2600	0.35							
MHL1JCTTD12N*	12			2300	0.40							
MHL1JCTTD15N*	15			2000	0.45							
MHL1JCTTD18N*	18			2000	0.45							
MHL1JCTTD22N*	22			1600	0.50							
MHL1JCTTD27N*	27			1400	0.55							
MHL1JCTTD33N*	33			1200	0.60							
MHL1JCTTD39N*	39			1100	0.65	500						
MHL1JCTTD47N*	47	900	0.70									
MHL1JCTTD68N*	68	700	0.80	400								
MHL1JCTTD82N*	82	600	1.0	300								
MHL1JCTTDR12*	120	8***	8***	500	1.3	250						
MHL1JCTTDR15*	150			500	1.7							
MHL1JCTTDR22*	220			400	2.0							

*Add tolerance character (S, J)

** The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

*** 50MHz

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[MHL1JCLTD4N7S](#) [MHL1ECTTP18NJ](#) [MHL1ECTTP2N7S](#) [MHL1ECTTP2N2S](#) [MHL1JCTTD3N3J](#) [MHL1ECTTP10NJ](#)
[MHL1JCTTD3N9J](#) [MHL1ECTTP22NJ](#) [MHL1ECTTPR10J](#) [MHL1JCTTD2N2J](#) [MHL1ECTTP1N5S](#) [MHL1ECTTP1N2S](#)
[MHL1JCTTD2N7J](#) [MHL1ECTTP1N0S](#) [MHL1ECTTP1N8S](#) [MHL1JCTTDR15J](#) [MHL1JCTTDR12J](#) [MHL1JCTTD22NJ](#)
[MHL1JCTTDR10J](#) [MHL1JCTTDR18J](#) [MHL1ECTTP12NJ](#) [MHL1JCTTD39NJ](#) [MHL1JTTTD39NJ](#) [MHL1JCTTD27NJ](#)
[MHL1JTTTD27NJ](#) [MHL1JCTTDR22J](#) [MHL1ECTTP27NJ](#) [MHL1ECTTP15NJ](#) [MHL1JCTTD33NJ](#) [MHL1JCTTD82NJ](#)
[MHL1JCTTD8N2J](#) [MHL1ECTTP47NJ](#) [MHL1ECTTP56NJ](#) [MHL1ECTTP5N6S](#) [MHL1JCTTD6N8J](#) [MHL1JCTTD5N6J](#)
[MHL1ECTTP4N7S](#) [MHL1JCTTD1N5J](#) [MHL1JCTTD56NJ](#) [MHL1JCTTD1N8J](#) [MHL1JCTTD1N0J](#) [MHL1JCTTD1N2J](#)
[MHL1JCTTD12NJ](#) [MHL1ECTTP6N8J](#) [MHL1JCTTD2N7S](#) [MHL1EKLTP10NJ](#) [MHL1EKLTP12NJ](#) [MHL1ECLTP2N2S](#)
[MHL1JCLTD39NJ](#) [MHL1JCLTD22NJ](#) [MHL1JCTTD5N6S](#) [MHL1JCTTD68NJ](#) [MHL1JCTTD47NJ](#) [MHL1ECTTP3N3S](#)
[MHL1ECTTP3N9S](#) [MHL1ECTTP33NJ](#) [MHL1JCTTD4N7J](#) [MHL1ECTTP39NJ](#) [MHL1JCTTD15NJ](#) [MHL1ECTTP82NJ](#)
[MHL1ECTTP8N2J](#) [MHL1JCTTD18NJ](#) [MHL1JCTTD10NJ](#) [MHL1ECTTP68NJ](#) [MHL1EKTP5N6S](#) [MHL1EKTP8N2J](#)
[MHL1EKLTP8N2J](#) [MHL1EKLTP5N6S](#) [MHL1JCTTD4N7S](#) [MHL2ACLTE33NJ](#) [MHL1ECLTPR10J](#) [MHL2ACLTE2N2S](#)
[MHL1ECLTP5N6S](#) [MHL1ECLTP2N7S](#) [MHL2ACLTE47NJ](#) [MHL2ACLTE1N8S](#) [MHL2ACLTE56NJ](#) [MHL2ACLTE10NJ](#)
[MHL1ECTPP10NJ](#) [MHL1EKLTP3N3S](#) [MHL1JCTTD6N8S](#) [MHL1JTK001KIT](#) [MHL1ETK001KIT](#)