

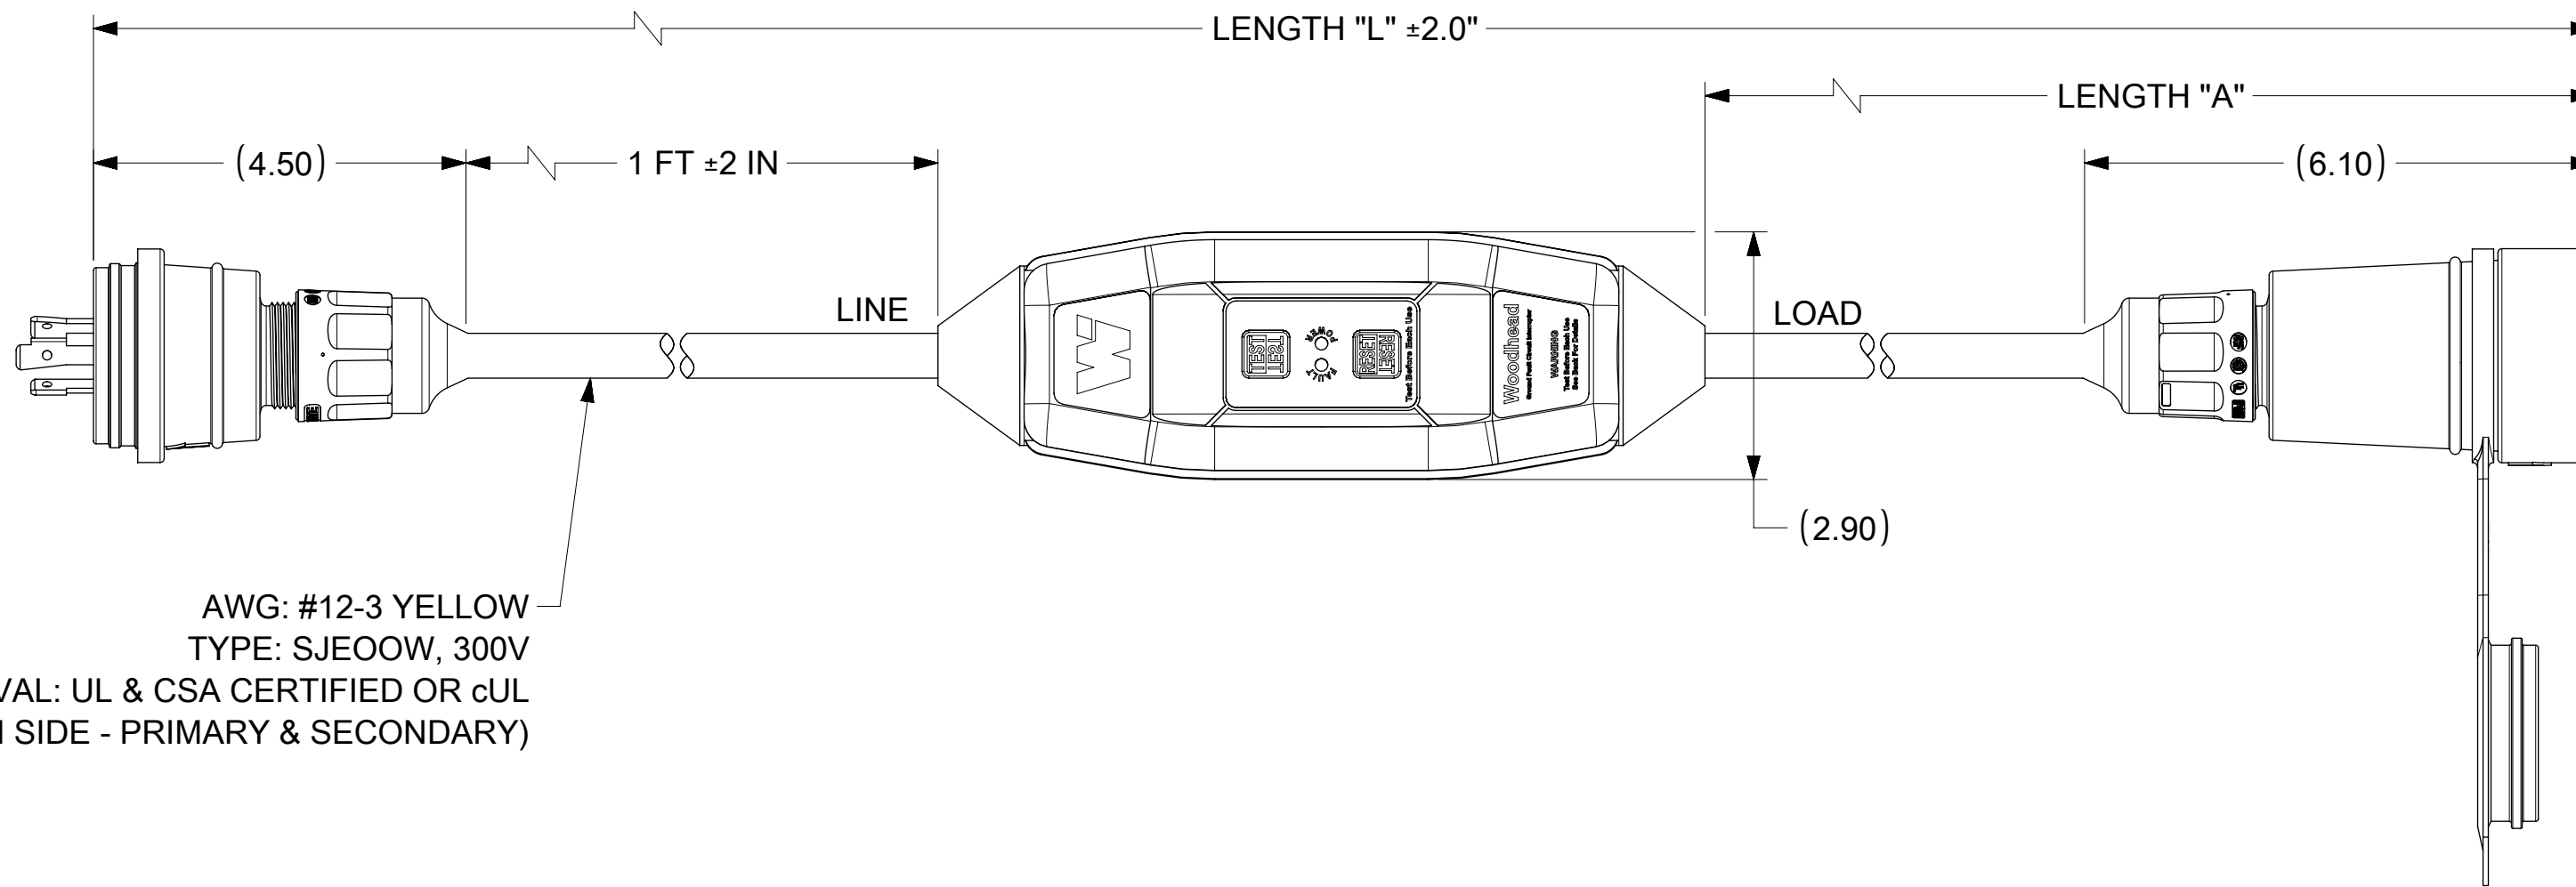


WATERTITE CONNECTOR  
NEMA L6-20P (26W48)



WATERTITE CONNECTOR  
NEMA L6-20R (27W48)

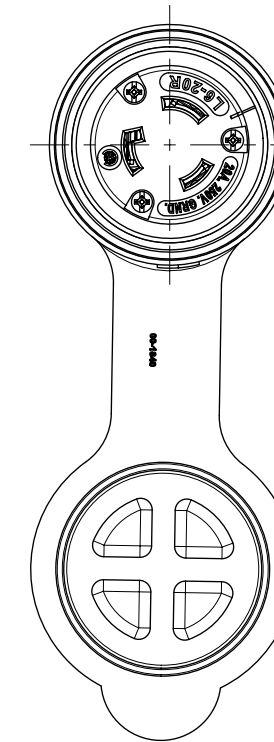

AWG: #12-3 YELLOW  
TYPE: SJEOOW, 300V  
AGENCY APPROVAL: UL & CSA CERTIFIED OR cUL  
(BOTH SIDE - PRIMARY & SECONDARY)

**TECHNICAL**

AGENCY APPROVAL:	SEE TABLE
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	120 AMPS, 50% INDUCTIVE
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	TYPE 4X, IP69, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP	LINE PLUG	LINE CONNECTOR	CABLE COLOR	AGENCY APPROVAL
1301530153	24052-0A	2 FT	1 FT	AUTO	NONE	NONE	YELLOW	cURus
1301530155	24052-1A	3 FT	1 FT	AUTO	26W48	27W48	YELLOW	cULus
1301530159	24052-25A	27 FT	25 FT	AUTO	26W48	27W48	YELLOW	cULus
1301530154	24052-0M	2 FT	1 FT	MANUAL	NONE	NONE	YELLOW	cURus
1301530277	24052-0MBLK	2 FT	1 FT	MANUAL	NONE	NONE	BLACK	cURus
1301530156	24052-1M	3 FT	1 FT	MANUAL	26W48	27W48	YELLOW	cULus

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SALES DRAWING RELEASED.			
DIMENSION UNITS		SCALE		GENERAL TOLERANCES (UNLESS SPECIFIED)			
INCH		NTS		ANGULAR TOL ± 0.5°		EC NO: 723814	
3 PLACES ±		4 PLACES ±		2 PLACES ±		DRWN: VASUTHKARP 2022/08/09	
1 PLACE ±		0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D: DNGUYEN62 2022/12/06	
DIVISIONAL SYMBOLS		THIRD ANGLE PROJECTION		DRAWING		SERIES	
				C-SIZE		130153	
				MATERIAL NUMBER		CUSTOMER	
				1301530155		GENERAL MARKET	
				DOCUMENT NUMBER		DOC TYPE   DOC PART   REVISION	
				1301530155		PSD   000   A	
				SHEET NUMBER		1 OF 1	