

NOTES1:

- UL Standard
 1. Rated voltage/current : 300V / 10A
 2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate Impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	8A		

NOTES2:







1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.08mm, Poles : N=04~36P
 3. Operating temperature: -40°C~+120°C
 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Tolerance
	Over	In mm	
6	TO	30	0.1/10
10	TO	60	TO
24	TO	100	TO
30	TO	150	TO
±0.15; ±0.20; ±0.30; ±0.30; ±0.50; ±0.70; ±1.00; ±1.30			±2°

5. RoHS Compliance

Ordering Information

JL2EDGVHC - 508 XX B 0 1

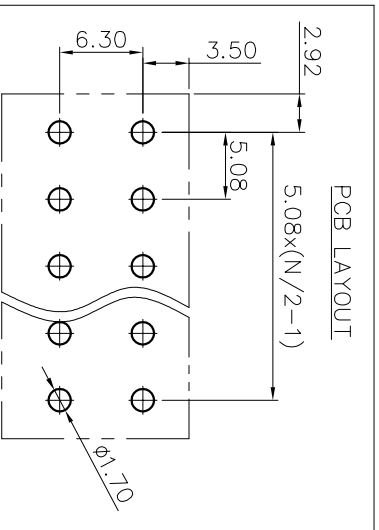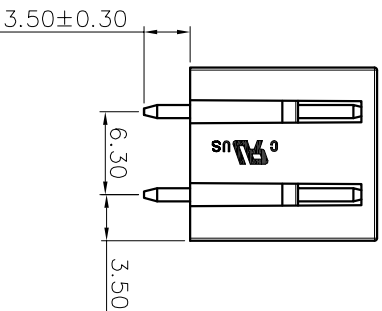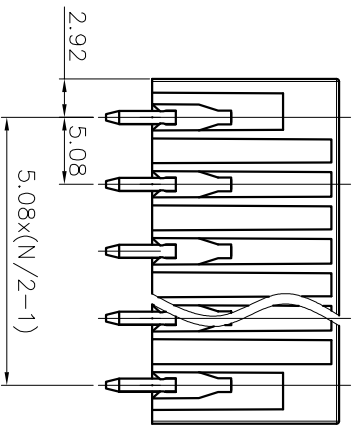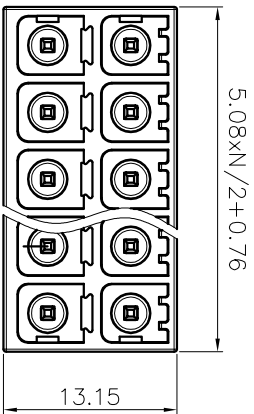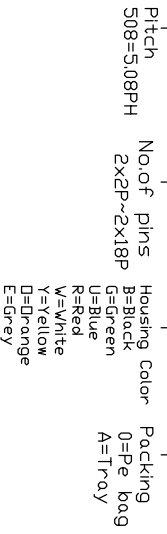

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL2EDGVHC-508XXB01
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PRD	1/1	JL2EDGVHC-THR-5.08-2xN插拔式公座/直脚/黑色		

JIN 东莞市锦凌电子有限公司
 DONGGUAN JINLING ELECTRONIC CO., LTD