Product data sheet

Specifications





Empty control station, Harmony XALK, XALD, plastic, yellow lid for push button 22mm, 1 cut out

XALK01

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of Product	Harmony XALK	
Product or Component Type	Empty control station	
Device short name	XALK	
product destination	For XB5 Ø 22 mm control and signalling units	
Control station application	Emergency stop function Emergency switching off function	
Number of cut-out	1 cut-out	
Colour of base of enclosure	Light grey RAL 7035)	
Colour of cover	Yellow RAL 1021)	
Material	Polycarbonate	
Cable entry	1 knock-out for cable entry 0.6 in (14 mm) 2 knock-outs for Pg 13 cable gland and ISO M20 0.5 in (12 mm)	
IP degree of protection	IP66 IEC 60529 IP67 IP69 IP69K	

Complementary

Assembly style	For customer assembly
Number of horizontal rows	1
Number of vertical rows	1
Net Weight	0.300 lb(US) (0.136 kg)
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131.00000000000 °F (55 °C) 0.1 m
Mounting of block	Front mounting Rear mounting
Electrical composition code	SR1 SF1 MR1 MF1
Main group	1 cut-out
Group of product	Standard yellow

Environment

protective treatment	тн
Ambient Air Temperature for Storage	-40.0000000000158.0000000000 °F (-4070 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 21, 2024 Life Is On Schneider

Ambient Air Temperature for Operation	-40.0000000000158.0000000000 °F (-4070 °C)
Overvoltage category	Class II IEC 60536
NEMA degree of protection	NEMA 13 NEMA 4X
IK degree of protection	IK03 conforming to IEC 62262
Standards	IEC 60947-5-5 UL 508 IEC 60947-5-4 JIS C8201-5-1 CSA C22.2 No 14 IEC 60947-1 IEC 60947-5-1 JIS C8201-1

Ordering and shipping details

Category	US10CS222475
Discount Schedule	0CS2
GTIN	3389110115826
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.677 in (6.800 cm)
Package 1 Width	2.953 in (7.500 cm)
Package 1 Length	2.677 in (6.800 cm)
Package 1 Weight	4.162 oz (118.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	60
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	16.464 lb(US) (7.468 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	480
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	162.534 lb(US) (73.724 kg)

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

②	Reach Free Of Svhc	
②	Toxic Heavy Metal Free	
②	Mercury Free	
⊘	Rohs Exemption Information	Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

XALK01

Dimensions Drawings

Dimensions

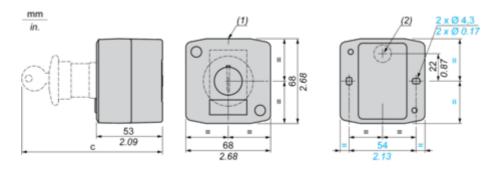

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in. (2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

Control station fitted with:	c in mm	c in in.
Flush pushbutton	62	2.44
Pilot light	64	2.52
Illuminated pushbutton	65.5	2.58
Projecting pushbutton	66	2.60
Selector switch	80	3.15
Mushroom head pushbutton	91.5	3.58
Latching mushroom head Emergency stop pushbutton wit h key	115	4.53
Key switch	105.5	4.15