








Overload relay 18...25 A For motor protection Size S2, Class 10 Contactor mounting Main circuit: Screw terminal Auxiliary circuit: Screw terminal Manual-Automatic-Reset !!! Phased-out product !!! Successor is SIRIUS 3RU2 Preferred successor type is >>3RU2136-4DB0<<

product brand name	SIRIUS
product designation	thermal overload relay
General technical data	
size of overload relay	S2
size of contactor can be combined company-specific	S2
power loss [W] for rated value of the current at AC in hot operating state	10.5 W
• per pole	3.5 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
protection class IP on the front	IP20
shock resistance	8g / 10 ms
type of protection	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	07/01/2006
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-20 ... +70 °C
• during storage	-55 ... +80 °C
• during transport	-55 ... +80 °C
relative humidity during operation maximum	100 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	18 ... 25 A
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 110 V	0.22 A
• at 125 V	0.22 A

• at 220 V	0.11 A				
Protective and monitoring functions					
trip class	CLASS 10				
Short-circuit protection					
design of the fuse link					
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 6 A, quick: 10 A				
Installation/ mounting/ dimensions					
mounting position	with vertical mounting surface +/-135° rotatable, with vertical mounting surface +/- 45° tiltable to the front and back				
fastening method	Contactormounting				
height	105 mm				
width	55 mm				
depth	118 mm				
required spacing					
• with side-by-side mounting					
— forwards	0 mm				
— backwards	0 mm				
— upwards	0 mm				
— downwards	0 mm				
— at the side	0 mm				
• for grounded parts					
— forwards	0 mm				
— backwards	0 mm				
— upwards	0 mm				
— at the side	6 mm				
— downwards	0 mm				
• for live parts					
— forwards	0 mm				
— backwards	0 mm				
— upwards	0 mm				
— downwards	0 mm				
— at the side	6 mm				
Connections/ Terminals					
product component removable terminal for auxiliary and control circuit	No				
type of electrical connection					
• for main current circuit	screw-type terminals				
• for auxiliary and control circuit	screw-type terminals				
type of connectable conductor cross-sections for main contacts					
• solid	2x (0.75 ... 16 mm ²)				
• stranded	2x (0.75 ... 25 mm ²), 0.75 ... 35 mm ²				
• finely stranded with core end processing	2x (0.75 ... 16 mm ²), 0.75 ... 25 mm ²				
type of connectable conductor cross-sections					
• for auxiliary contacts					
— solid	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)				
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)				
• for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)				
Electrical Safety					
touch protection against electrical shock	finger-safe				
Approvals Certificates					
General Product Approval	For use in hazardous locations				
 EG-Konf.	 CCC	Confirmation	 UL	 EAC	 ATEX
For use in hazardous locations	Test Certificates	Marine / Shipping	other		

other	Railway	Environment
-------	---------	-------------

[Miscellaneous](#)

[Special Test Certificate](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU1136-4DB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU1136-4DB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU1136-4DB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU1136-4DB0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RU1136-4DB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU1136-4DB0&objecttype=14&gridview=view1>

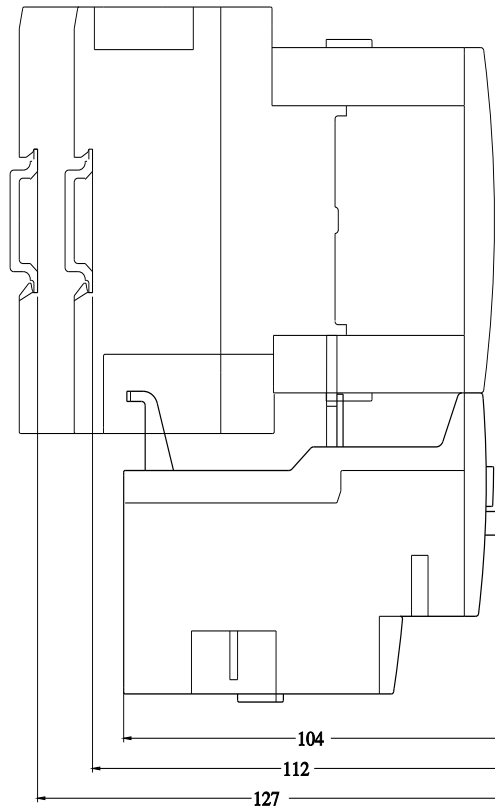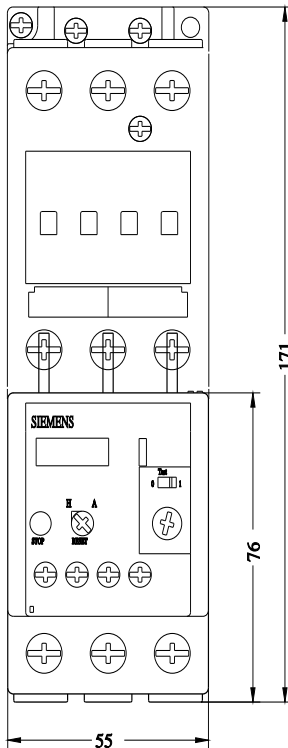

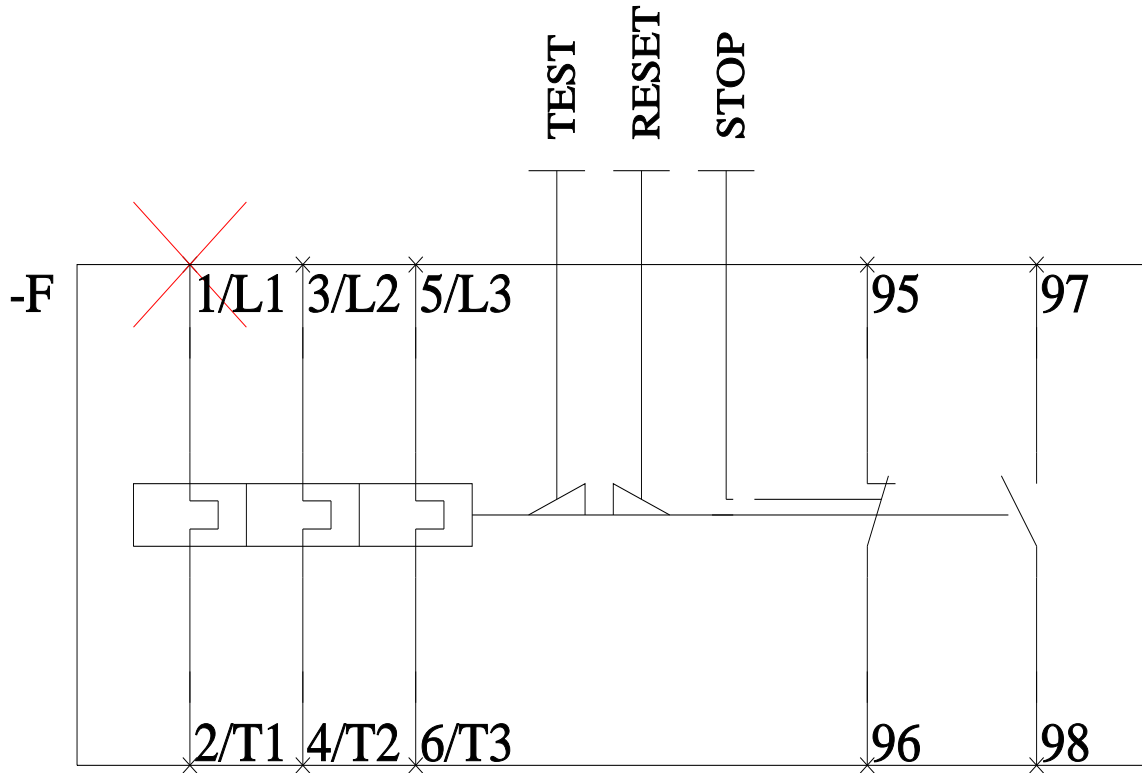

last modified:

2/11/2021 