



NOTES:

- MATERIAL: BERYLLIUM COPPER ALLOY
- CONTACT PLATING:
CONTACT AREA: PLATING 1um GXT over 1.0/3.0 um Ni UNDERPLATE.
SOLDER AREA: PLATING GOLD FLASH OVER 1.0/3.0 um Ni UNDERPLATE.
- PACKAGING: TAPE & REEL
- PART NUMBER DESCRIPTION:
10125000-0 0 X X X

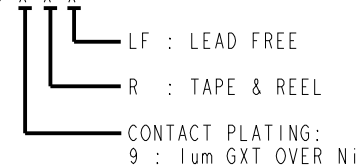

spec ref *		dr	Andy Lu	2013/04/07	projection 	mm ←→	size	A4	scale	20.000		
tolerance std		eng	Li-Qing Lei	2017/05/04			ecn no	ELX-N-26898-1				
ASME Y14.5		chr	-	-			rel level	Released				
surface	linear	0.X	±0.3		Amphenol FCI	title	UNIVERSAL CONTACT			dwg no	10125000	rev
		0.XX	±0.13									
		0.XXX	±0.050		www.fci.com	cat. no.	Product - Customer Drw			sheet 1 of 2		
ASME Y14.5	angular	0°	±3°									

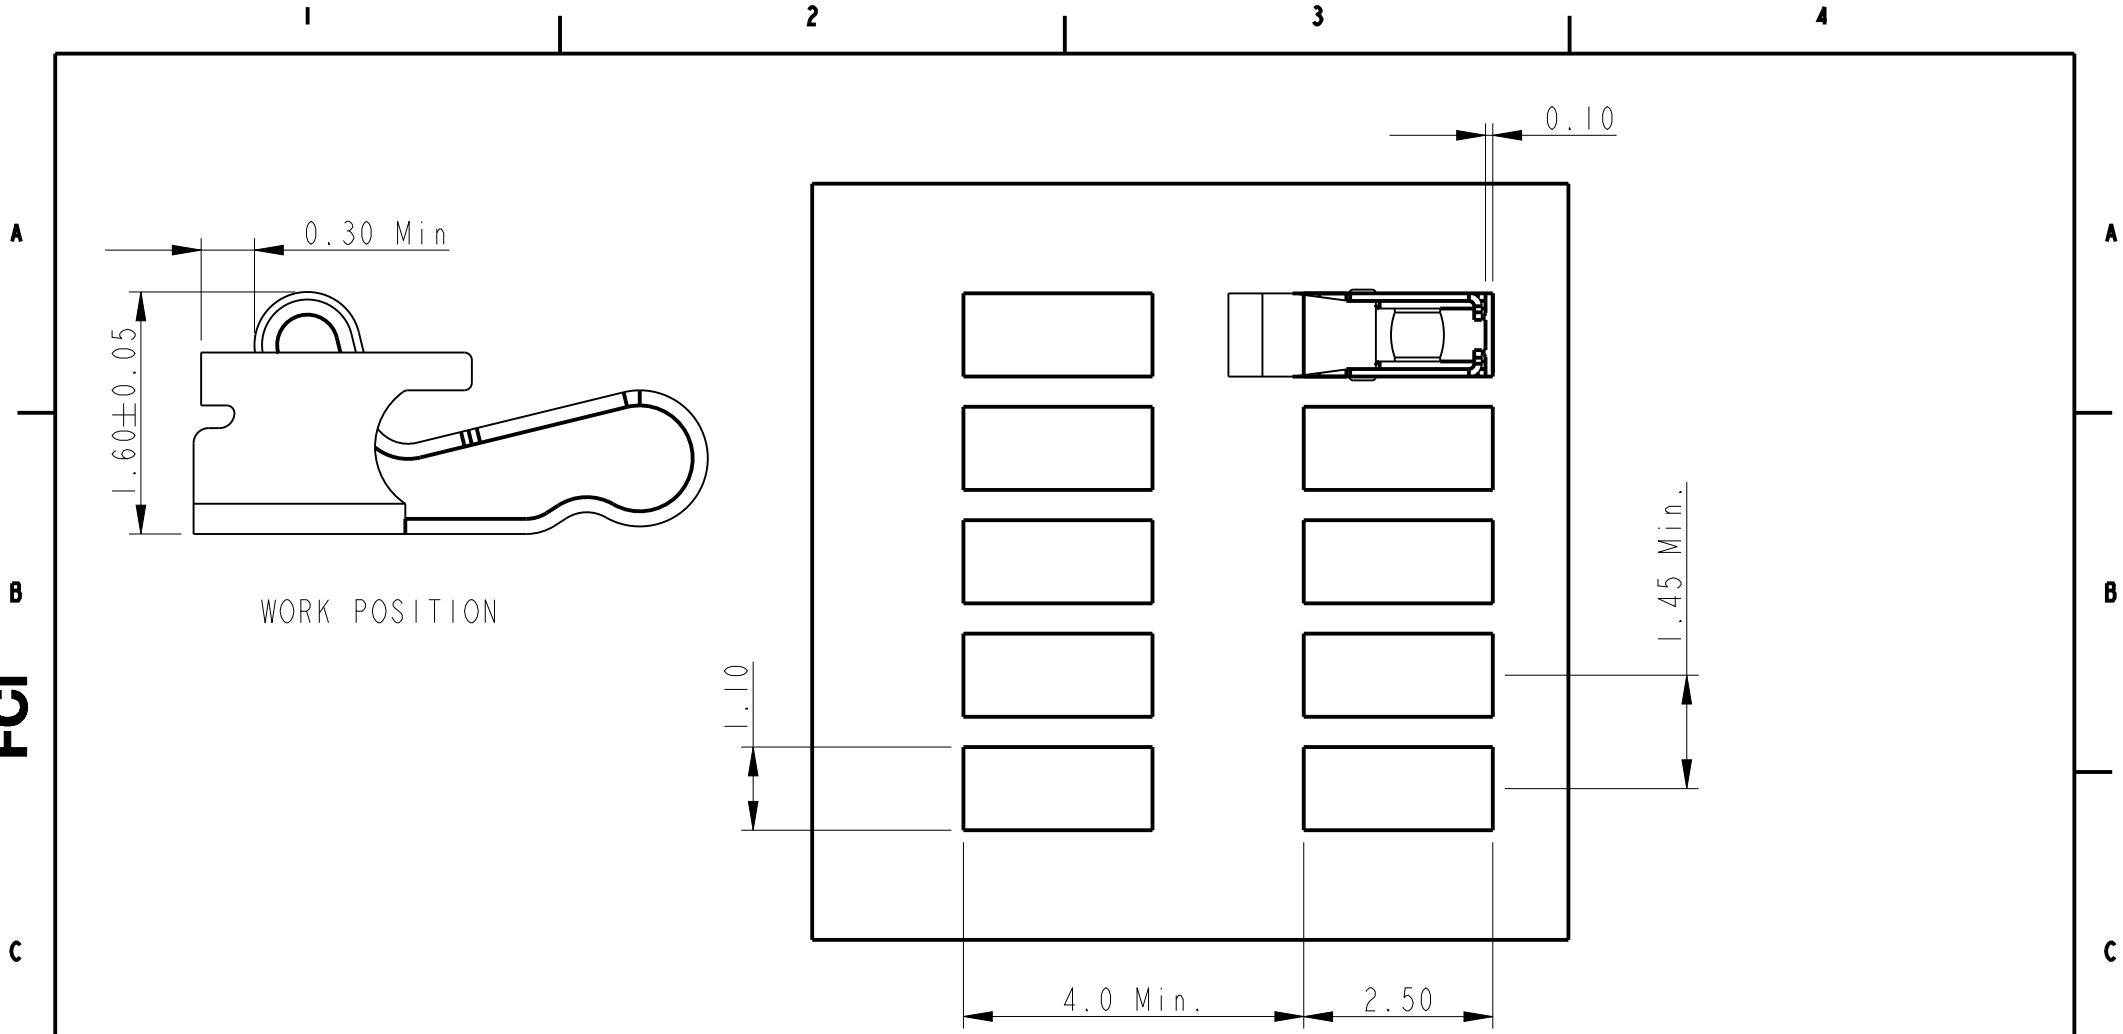

RECOMMENDED PCB DIMENSION & MIN PITCH
TOLERANCE: +/-0.05mm

spec ref *		dr	Andy Lu	2013/04/07	projection 	mm ←→	size	A4	scale	10.000	
tolerance std		eng	Li-Qing Lei	2017/05/04			ecn no	ELX-N-26898-1			
ASME Y14.5		chr	-	-				rel level		Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Tim Yao	2017/06/09	product family		-				
surface	linear	0.X	±0.3		Amphenol FCi	title	UNIVERSAL CONTACT		dwg no	10125000	rev
		0.XX	±0.13								
		0.XXX	±0.050								
ASME Y14.5	angular	0°	±3°		www.fci.com	cat. no.	-		Product - Customer Drw		sheet 2 of 2