
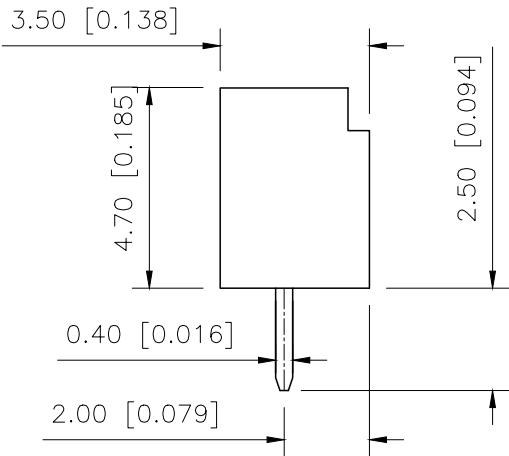




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图框升级整理图面	2024.08.13	阿 树

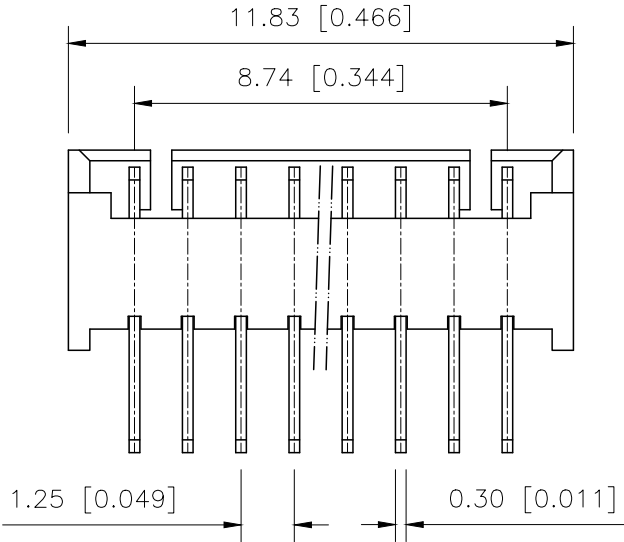

- SPECIFICATIONS
- Voltage rating:125V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-45°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ

PART NO.:
X9821 W V-XX-N0 SN
① ② ③ ④ ⑤ ⑥

- ① Series No
② Category:W-Wafer
③ Welding Board Angle:V-Straight 180°
④ Row No-Pin No: XX-02P~12P
⑤ Material:N0-PA66 ; 46-PA46 UL94V-0
⑥ Planting Category:SN-Bright Tin Plating

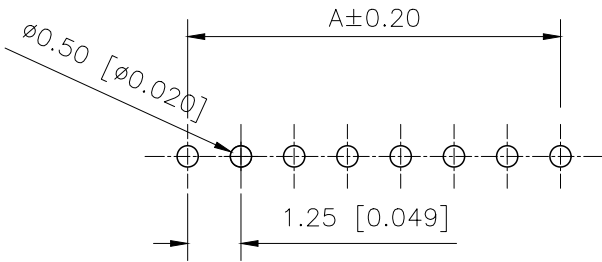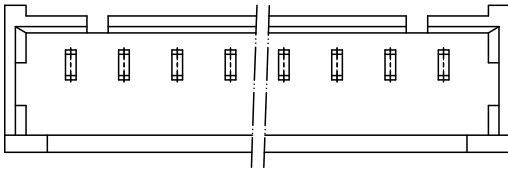

PCB Layout

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	1.25	4.35	08	8.75	11.85
03	2.50	5.60	09	10.00	13.10
04	3.75	6.85	10	11.25	14.35
05	5.00	8.10	11	12.50	15.60
06	6.25	9.35	12	13.75	16.85
07	7.50	10.60	/		

X9821WV-XX-N0SN	PA66	Phosphor Bronze	X9821H
PART NO	Material	Material(Pin)	Suitable XKB Housing

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB

DESIGN	阿 树	VIEW:		MODEL TYPE:	1.25 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9821WV-XX-N0SN
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1