

PIDG

TE Internal #: 330896-2


Closed Ring Tongue Terminal, 16 – 14 AWG, 3/8 Stud Size, 9.91 mm [.39 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially

Insulated

View on TE.com >



Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

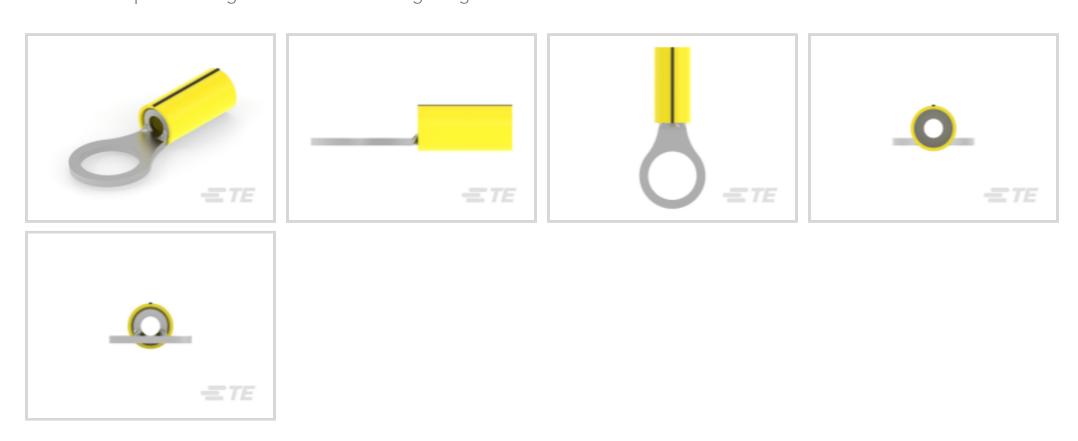

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: 3/8

All PIDG Ring Tongue Terminals (411)

Features

Product Type Features

Troduct Type reduces		
Terminal Features	Heavy Duty	
Ring Terminal Product Type	Closed Ring Tongue Terminal	
Stud Size	3/8	
Sealable	No	
Wire Insulation Support Retention Type	Insulation Support	
Configuration Features		
Number of Holes	1	
Electrical Characteristics		
Voltage Rating	300 V	
Body Features		
Insulation Sleeve Color	Yellow	
Stripe Color	Black	
Product Weight	4.889 g	



Barrel Type	Closed	
Terminal Orientation	Straight	
Terminal Plating Material	Tin	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Wire Size	2050 – 5180 CMA	
Stud Diameter	9.91 mm[.39 in]	
Tongue Thickness	.79 mm[.031 in]	
Product Length	32.9 mm[1.296 in]	
Compatible Insulation Diameter (Max)	5.84 mm[.23 in]	
Compatible Insulation Diameter Range	3.81 – 5.84 mm[.15 – .23 in]	
Usage Conditions		
Insulation Option	Partially Insulated	
Insulation Option Operating Temperature Range	Partially Insulated 105 °C[221 °F]	
Operating Temperature Range		
Operating Temperature Range Operation/Application	105 °C[221 °F]	
Operating Temperature Range Operation/Application Compatible With Wire Base Material	105 °C[221 °F] Copper	
Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material	105 °C[221 °F] Copper	
Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Industry Standards	105 °C[221 °F] Copper Tin	
Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Industry Standards Government Qualified Terminal	105 °C[221 °F] Copper Tin	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)



		contain		CV/IIC
1,000	$n \cap T$	CONTAIN	KFA(H	SVH

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC
	Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts









Also in the Series | PIDG



Compression Connectors(17)



Crimp Wire Pins, Tabs & Ferrules(41)



Hand Crimping Tools(2)








Quick Disconnects(32)



Ring Terminals(589)

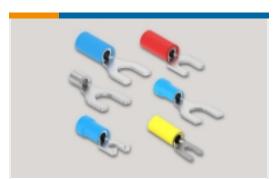

Spade Terminals(228)



Special Purpose Terminals(1)



Customers Also Bought



TE Part #338095-4
MICRO-MATCH COSIHSG



TE Part #6418370001 TMS-SCE-1/8-2.0-4



TE Part #640251-8
08P SL156 HSG W/O LCK RAMP



TE Part #338097-1
MICRO-MATCH COSICNT



TE Part #177917-1
AMP POWER DBL LOCK TAB (L)



TE Part #328527 TERMINAL,PG R 16-14 8



TE Part #3-640601-4 04P MTA156 CONN ASSY 22AWG LF



TE Part #2-520083-2 ULTRA-FAST .110/.125 ASY REC 22-18 TPBR





Documents



Product Drawings

PIDG 16-14 HD R 3/8, TAPE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_330896-2_L.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_330896-2_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_330896-2_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.