





Military QPL M28876/1 through /14 fiber optic connectors

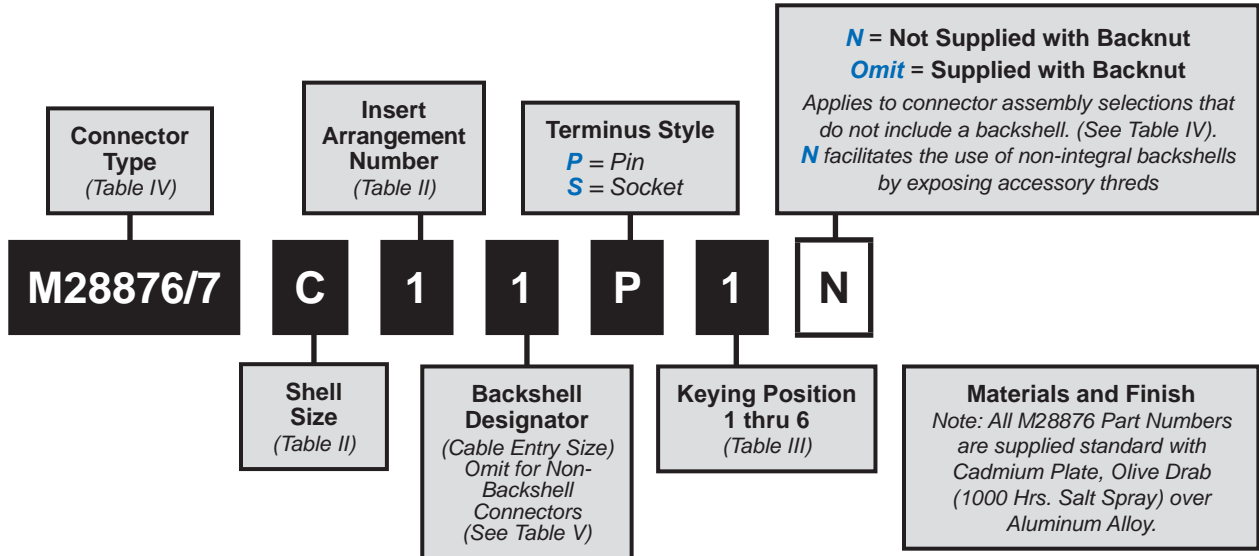

Glenair commercial equivalent MIL-PRF-28876 type fiber optic connectors

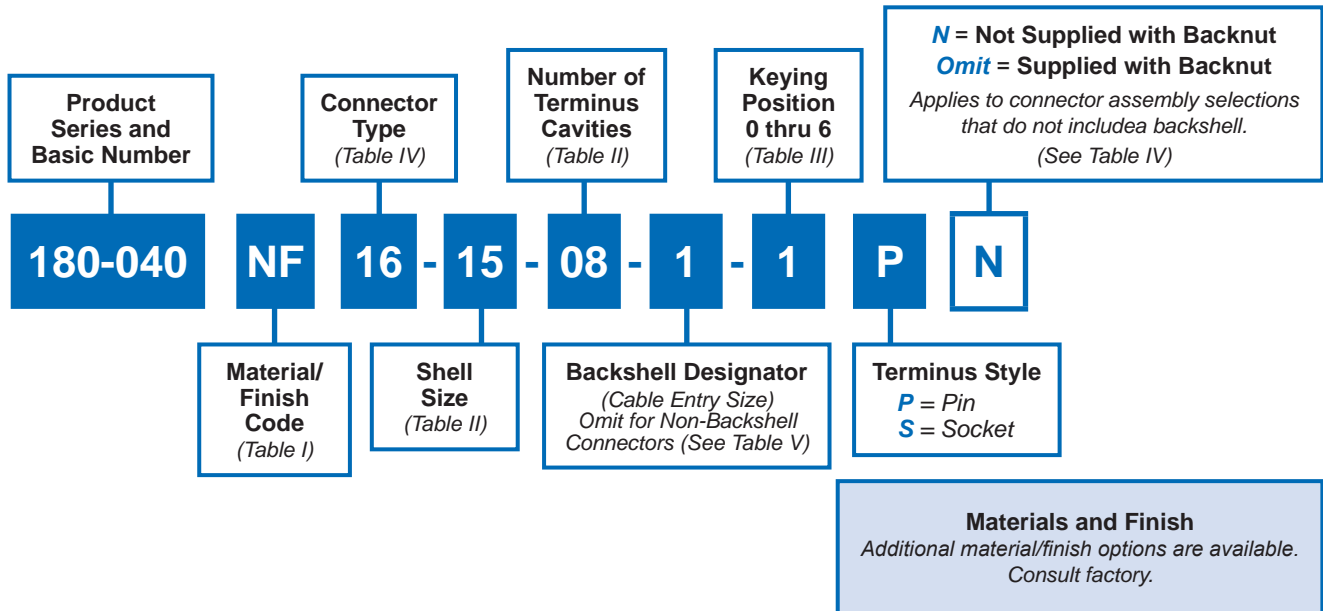

MIL-PRF-28876 • 180-040
QPL Fiber Optic Connectors
How to Order



Table I: Material and Finish (Commercial)

Code	Material	Finish Description
M	Aluminum Alloy	Electroless Nickel
NF		Cadmium, Olive Drab
MT*		Nickel-PTFE, Grey
ZR		Zinc-Nickel, Black

Refer to Appendix for material/finish details

Table II: Shell Size and Insert Arrangement

Mil-Spec		Commercial	
Shell Size	Insert Arrangement	Shell Size	Number of Cavities
A	1	11	02
B	1	13	04
C	2	15	06
	1		08
F	2	23	18
	1		31

Consult factory for QPL status

Table V: Backshell Designator

Backshell Designator	Max Allowable Cable Diameter by Shell Size			
	A (11)	B (13)	C (15)	F (23)
1	.250 (6.4)	.285 (7.2)	.500 (12.7)	.866 (22.0)
2	.346 (8.8)	.346 (8.8)	.250 (6.4)	1.000 (25.4)
3		.453 (11.5)	.375 (9.5)	.600 (15.2)

Table IV: Connector Type

Connector Type	Backshell Type	MIL-Spec	Commercial
Wall Mount Receptacle	None	M28876/1	03
	Straight	M28876/2	13
	45°	M28876/3	23
	90°	M28876/4	33
In-Line Receptacle	Straight	M28876/5	15
Plug	None	M28876/6	06
	Straight	M28876/7	16
	45°	M28876/8	26
	90°	M28876/9	36
Jam Nut Receptacle	None	M28876/11	04
	Straight	M28876/12	14
	45°	M28876/13	24
	90°	M28876/14	34

Material and Finish

- A. M28876 part numbers supplied standard with Cad plate/olive drab over aluminum alloy. See Table I for commercial plating options.
- B. Hardware: Aluminum alloy/chem film, stainless steel/passivate
- C. Insert: Aluminum alloy/anodize
- D. Seals: Fluorosilicone

Notes

Termini (Not Supplied with Connector):
M29504/14 - Pin terminus, MIL-Spec
M29504/15 - Socket Terminus, MIL-Spec
M29504/3 - Dummy Terminus, MIL-Spec
181-039 - Pin Terminus, MIL-Spec Style
181-040 - Socket terminus, MIL-Spec Style
181-051 - Dummy Terminus MIL-Spec Style
Backnut retained using thread-locking compound.
Consult factory for appropriate termination and assembly tools/procedures.
Operating Temperature Range: -55° to +125°C.

Dimensions in Inches (millimeters) are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[180-040NF06-15-08-2P](#) [180-040NF06-15-08-3P](#) [180-040M03-15-08-1PN](#) [180-040NF06-15-08-1PN](#) [180-091NF06-13-4SB](#) [180-091XMS7-11-2SN](#) [180-049M](#) [180-122NF06-13-6N](#) [180044NF07-25-29PB](#) [180091XM06-19-11PA](#) [180091NF06-23-21PD](#) [180044NF07-23-21PA](#) [180091MT06-21-16SN](#) [180060XM06-25-29SN](#) [180091MT08-23-21PN](#) [180040NF04-15-08-3S](#) [180091NF06-23-21PA](#) [180040NF06-15-06-1PN](#) [180091NF06-21-16PA](#) [180091NF06-23-21SA](#) [180091XM08-21-16PN](#) [180040M03-11-02-1S](#) [180040MT06-1304-1PN](#) [180091MT06-23-21SN](#) [180091NF06-23-21SB](#) [180040MT04-1304-2S](#) [180040MT06-15-08-1PN](#) [180091XM06-25-29PA](#) [180091MT06-19-11PN](#) [180-145G2-01N1H1](#) [180-071-C31](#) [180-156G216-12N1M1A](#) [180-122Z108-15-16N](#) [180-071-NF61-F](#) [180-131M07-11-4N](#) [180-091M06-25-29SE](#) [180-072NF06-25-46P](#) [180-044M06-25-37SA](#) [180-091Z106-13-4PC](#) [180-091M08-25-29PE](#) [180-091MS7-23-21SN](#) [180-091M06-13-4SA](#) [180-044M06-25-37SC](#) [180-091MS06-17-8PN](#) [180-155C](#) [180-091NF06-15-5PB](#) [180-122ZNU06-11-4N](#) [180-044M07-25-29PN](#) [180-050M](#) [180-044M07-23-21PN](#) [180-091M08-23-21SN](#) [180-044NF06-13-4SD](#) [180-044NF07-17-8PN](#) [180-102NF06-1](#) [180-122M08-11-4N](#) [180-122NF06-15-16N](#) [180-044M07-25-29P](#) [180-044M07-11-2PN](#) [180-040MT16-13-04-2-1P](#) [180-040NF04-13-04-3SN](#) [180-040NF04-13-04-1SN](#) [180-040NF03-13-04-1S](#) [180-040NF03-15-08-1S](#) [180-040MT04-15-08-1S](#) [180-040NF03-13-04-1SN](#) [180-040NF03-15-08-1SN](#) [180-040NF04-13-04-4SN](#) [180-040NF04-13-04-5SN](#) [180-040M06-13-04-1PN](#) [180-040NF04-13-04-2SN](#) [180-040MT16-15-08-1-1P](#) [180-040MT04-13-04-1S](#) [180-040NF06-13-04-1PN](#)