
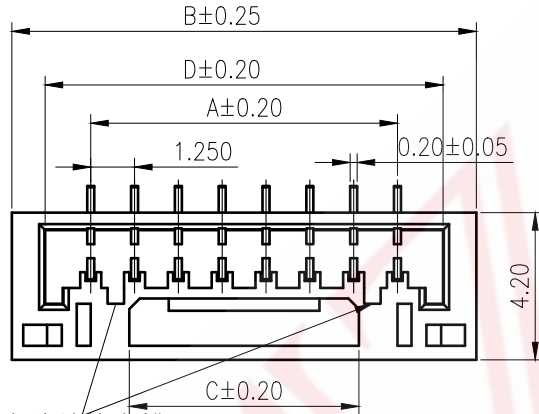
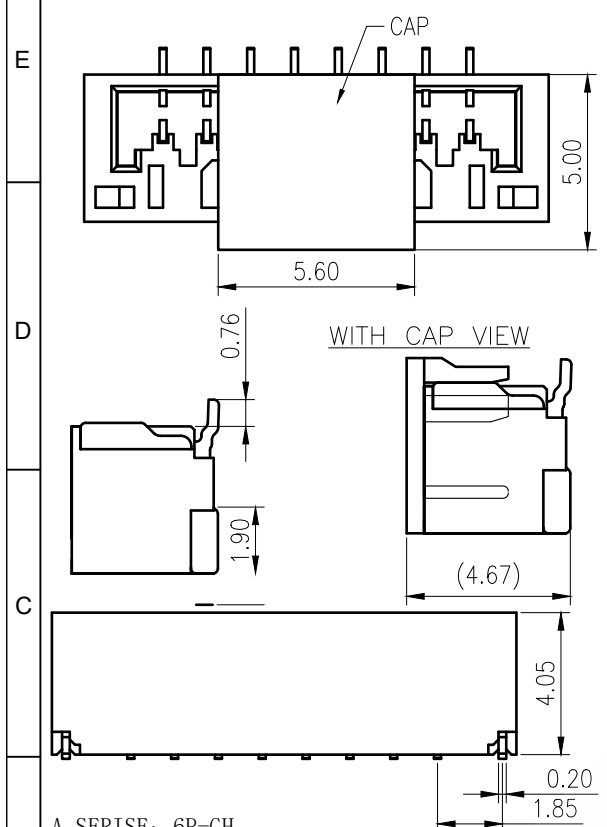



1 2 3 4 5 6 7 8
SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

SPECIFICATIONS
 Current rating: 1A AC, DC
 Voltage rating: 50V AC, DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 100MΩ/ min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 30mΩ/ max.



8-12P有此结构卡槽
 2-7P没有此卡槽

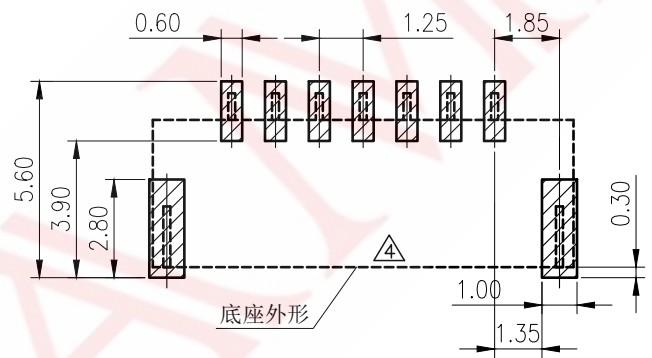

Part No	DIMENSIONS			
	A	B	C	D
02	1.25	5.75	2.20	3.75
03	2.50	7.00	3.30	5.00
04	3.75	8.25	4.55	6.25
05	5.00	9.50	4.55	7.50
06	6.25	10.75	6.55	8.75
07	7.50	12.00	6.55	10.00
08	8.75	13.25	6.55	11.25
09	10.00	14.50	6.55	12.50
10	11.25	15.75	8.55	13.75
11	12.50	17.00	8.55	15.00
12	13.75	18.25	8.55	16.25

A. SERISE: 6P-GH
 B. SPACING: H-1.25mm
 C. MOUNTING: C-LT
 D. STANDARD: A-WAFER
 E: PIN: 02-2P (02-16P)
 F: CODE: 0-REGULAR



Recommended P.C.Board Layout

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	GENERAL TOLERANCE					
1	引脚	黄铜	N	高温亮锡	≥0~2<	±0.15	SCALE	1:1	UNIT	mm
2	主体	LCP	1	XXX	≥2~5<	±0.25	SAMZO COMPONENTS Electronic switch and connector manufacturer			
3	左焊片	黄铜	1	高温亮锡	≥0~2<	±0.15				
4	右焊片	黄铜	1	高温亮锡	≥5	±0.35				

FIRST VIEW

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: GH1.25-AWB-LT
 DWG NO: 6PHC-P25
 PART NO: 6PHC12501
 MODEL NO: 6PHCA-**-0
 NAME: WAFER CONNECTOR