

# Product data sheet

Specifications



safety module, Harmony XPS,  
zero speed monitoring with time  
delay, 48 to 240V AC or DC, screw

XPSUVN31AP

## Main

range of product	Harmony Safety Automation
product or component type	Safety module
Safety module name	XPSUVN
Safety module application	For zero speed detection
Function of module	Monitoring 3-phase motor Monitoring 3-phase motor with star-delta starting Monitoring 3-phase motor with variable number of poles Monitoring 3-phase motor with variable number of poles and star-delta starting Monitoring dc motor Monitoring servo motor Monitoring 3-phase motor supplied by variable speed drive Monitoring 3-phase motor supplied by servo drive Controlling enegization to open of guard switch type XCSE, XCSLE, XCSLF, XCST
Safety level	Can reach PL e/category 3 for normally open relay contact ISO 13849-1 Can reach SILCL 3 for normally open relay contact IEC 62061 Can reach SIL 3 for normally open relay contact IEC 61508
Safety reliability data	MTTFd > 30 years ISO 13849-1 Dcavg = 98.9 % ISO 13849-1 PFHd = 2.44E-9 1/h ISO 13849-1 HFT = 1 IEC 62061 PFHd = 2.44E-9 1/h IEC 62061 SFF > 99% IEC 62061 HFT = 1 IEC 61508-1 PFHd = 2.44E-9 1/h IEC 61508-1 SFF > 99% IEC 61508-1 Type = B IEC 61508-1
Product certifications	TÜV cULus
[Us] rated supply voltage	48...240 V AC/DC - 10...10 %
Output type	Relay, 1 NO, volt-free
Number of additional circuits	2 solid state outputs

## Complementary

Power consumption in W	2.5 W
Power consumption in VA	5.5 VA
Input voltage	690 V

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Input detection threshold</b>	50 mV 65 mV 85 mV 110 mV 140 mV 180 mV 230 mV 300 mV 400 mV 500 mV
<b>Time delay</b>	0.5 s 1 s 2 s 3 s 5 s 8 s 12 s 20 s 35 s 60 s
<b>[Ie] rated operational current</b>	5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact
<b>[Ith] conventional free air thermal current</b>	6 A NO relay output circuit
<b>Associated fuse rating</b>	6 A gG relay output IEC 60947-1
<b>Standards</b>	IEC 60947-5-1 IEC 61508-1 functional safety standard IEC 61508-2 functional safety standard IEC 61508-3 functional safety standard IEC 61508-4 functional safety standard IEC 61508-5 functional safety standard IEC 61508-6 functional safety standard IEC 61508-7 functional safety standard ISO 13849-1 functional safety standard IEC 62061 functional safety standard
<b>Minimum output current</b>	10 mA relay output
<b>Minimum output voltage</b>	5 V relay output
<b>[Uij] rated insulation voltage</b>	690 V phase to phase 2)IEC 60947-1 400 V phase to earth 2)IEC 60947-1
<b>[Uimp] rated impulse withstand voltage</b>	4 kV II IEC 60947-1
<b>Local signalling</b>	LED green power power ON LED red error error LED yellow state status LED yellow L12 input line comparison LED yellow L32 input line comparison
<b>Connections - terminals</b>	Removable screw terminal block solid or flexible 0.2...2.5 mm <sup>2</sup> Removable screw terminal block flexible with ferrule 0.25...2.5 mm <sup>2</sup> single conductor Removable screw terminal block solid or flexible 0.2...1.5 mm <sup>2</sup> twin conductor Removable screw terminal block flexible with ferrule 2 x 0.25...1 mm <sup>2</sup> without cable end, with bezel Removable screw terminal block flexible with ferrule 2 x 0.5...1.5 mm <sup>2</sup> with cable end, with bezel
<b>mounting support</b>	35 mm symmetrical DIN rail
<b>Depth</b>	4.7 in (120 mm)
<b>Height</b>	3.9 in (100 mm)
<b>Width</b>	0.9 in (22.5 mm)
<b>net weight</b>	0.4 lb(US) (0.2 kg)

## Environment

<b>IP degree of protection</b>	IP20 terminals)IEC 60529 IP40 housing)IEC 60529 IP54 mounting area)IEC 60529
<b>ambient air temperature for operation</b>	-13...131 °F (-25...55 °C)
<b>ambient air temperature for storage</b>	-40...158 °F (-40...70 °C)
<b>Relative humidity</b>	5...95 % non-condensing

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	2.6 in (6.5 cm)
<b>Package 1 Width</b>	5.3 in (13.5 cm)
<b>Package 1 Length</b>	6.1 in (15.5 cm)
<b>Package 1 Weight</b>	9.6 oz (272.0 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	16
<b>Package 2 Height</b>	11.8 in (30 cm)
<b>Package 2 Width</b>	11.8 in (30 cm)
<b>Package 2 Length</b>	15.7 in (40 cm)
<b>Package 2 Weight</b>	11.188 lb(US) (5.075 kg)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

RoHS Exemption Information Yes

## Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu RoHS Directive Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)


Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile [End of Life Information](#)






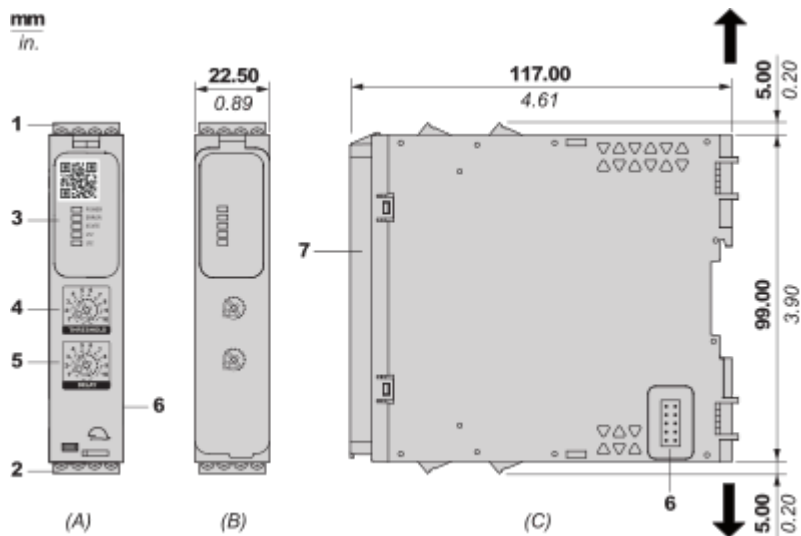

Dimensions Drawings

Dimensions

Front and Side Views




- (A) : Product drawing
- (B) : Screw clamp terminal
- (C) : Side view
- (1) : Removable terminal blocks, top
- (2) : Removable terminal blocks, bottom
- (3) : LED indicators
- (4) : Voltage threshold selector
- (5) : Activation delay selector
- (6) : Connector for optional output extension module XPSUEP (lateral)
- (7) : Sealable transparent cover

mm in.	7.0–8.0 0.28–0.31					
	mm <sup>2</sup>	0,2... 2,5	0,25...2,5	0,2... 1,5	0,25...1	0,5... 1,5
	AWG	24... 12	24...12	24...16	24...18	20...16
	Ø 3,5 mm (0.14 in)				Nm	0.5... 0.6
					lb-in	4,4... 5,3

Mounting and Clearance

Mounting to DIN rail


---

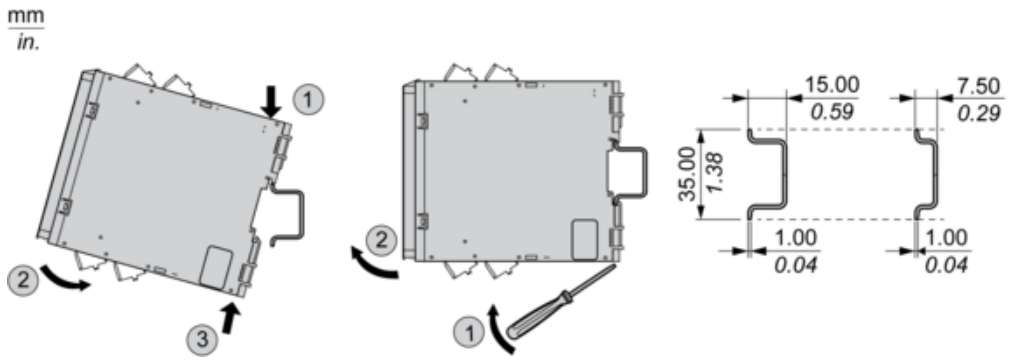

Screw-mounting


---

mm  
in.

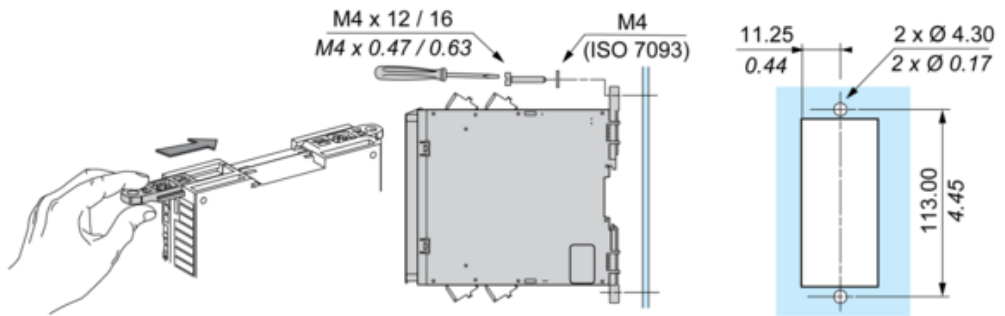

Connections and Schema

Wiring Diagram

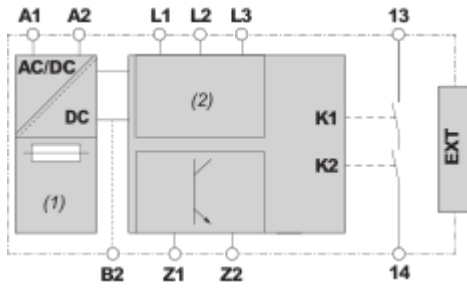

(1) : A1-A2 (Power supply)

(2) : L1-L2-L3 (Input channels of safety-related analog input )

13-14 : Terminals of the safety-related outputs

**B2** : Terminal for common reference potential for 24 Vdc signals. The power supplies of the connected equipment must have a common reference potential to be connected to this terminal. In the case of XPSUVN31A\*, terminal B2 must be grounded. In the case of XPSUVN11A\*, the safety module is already grounded via the PELV power supply unit connected to terminals A1 and A2.

**Z1** : Pulsed output for diagnostics, not safety-related

**Z2** : Solid state output, not safety-related

**EXIT** : Connector for output extension module XPSUEP



Image of product / Alternate images

Alternative

