
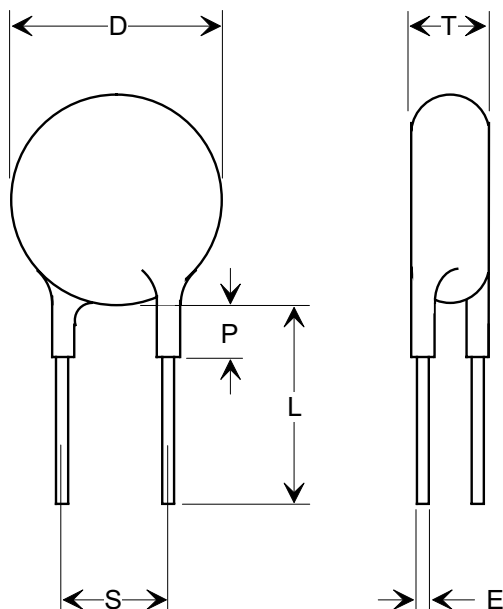



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.



**SPECIFICATIONS**

TUSONIX PART NO.	841-040-X5U0-103 M	
D (Diameter):	.660 ± .030 [16.76 ±0.76]	
T (Thickness):	.120 ± .040 [3.05 ±1.02]	
S (Lead Wire Spacing):	.375 ±.060 [9.52 ±1.52]	
L (Lead Wire Length):	1.25 [31.75] MIN.	
E (Lead Wire Diameter):	.032 [0.81] (20 AWG.)	
P (Coating on Leads Max.):	.125 [3.17]	
Capacitance Value:	10,000 pF	
Capacitance Tolerance:	± 20%	
Temperature Coefficient:	X5U	
Voltage:	Working:	500 VDC
	Test:	1500 VDC
	Life:	1000 VDC
Marking:	TMK, MIL PART NO., DATE CODE.	

NOTE:  
TESTED TO MIL-C-11015/12E FOR  
QUALITY CONFORMANCE INSPECTION.  
STYLE CK63.

<b>REVISION RECORD</b> Original Release C.O. <b>19991004-4-02</b> ADDED METRIC, PROJECTION & CIRCUIT. S.M. 01-08-02 <b>20020103-8-01</b>	<b>0</b>	<b>--TOLERANCES--</b> Unless Otherwise Specified	Title		
	<b>1</b>		DECIMAL ±	<b>DISC</b>	
			ANGLES ±	Drawn	S.M. 10-05-99
			<b>TUSONIX</b> TUCSON, ARIZONA	Approved	E.F. 10-05-99
		<b>A</b>	<b>841-040-X5U0-103M</b>		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[0841-040-X5U0-103M](#)