

## SolidMatrix® Surface Mount Fuses

### HB Series (High Current), 1206 Size



#### Features:


- Special products for high current rating applications
- Higher current ratings and excellent inrush current withstanding capability (high  $I^2t$ )
- Glass ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Superior arc suppression capability
- Symmetrical design with marking on both sides (optional)
- Operating temperature range:  $-55^{\circ}\text{C}$  to  $150^{\circ}\text{C}$  (with de-rating)

#### Clearing Time Characteristics:

| % of current rating | Clearing time at 25°C |
|---------------------|-----------------------|
| 100%                | 4 hours min.          |
| 350%                | 5 seconds max.        |

#### Shape and Dimensions:

| Unit | Inch              | mm              |
|------|-------------------|-----------------|
| L    | $0.126 \pm 0.008$ | $3.20 \pm 0.20$ |
| W    | $0.063 \pm 0.008$ | $1.60 \pm 0.20$ |
| T    | $0.038 \pm 0.008$ | $0.97 \pm 0.20$ |
| B    | $0.020 \pm 0.010$ | $0.51 \pm 0.25$ |



#### Agency Approval:

Recognized Under the Components Program of UL.  
 File Number: E232989.

#### Applications:

- Power tools
- DC-DC convert
- Display
- PC & Notebook
- Server
- Battery pack

#### Ordering Information:

| Part Number     | Current Rating (A) | Voltage Rating (Vdc) | Interrupting Ratings   | Nominal Cold DCR( $\Omega$ ) <sup>1</sup> | Nominal $I^2t$ ( $\text{A}^2\text{s}$ ) <sup>2</sup> | Marking Code <sup>3</sup> |
|-----------------|--------------------|----------------------|------------------------|---|--|---------------------------|
| F1206HB10V024TM | 10                 | 24                   | 150 A at rated voltage | 0.0045                                    | 12   | Q                         |
| F1206HB12V024TM | 12                 | 24                   |                        | 0.0039                                    | 19   | X                         |
| F1206HB15V024TM | 15                 | 24                   | 200 A at rated voltage | 0.0031                                    | 34   | Y                         |
| F1206HB20V024TM | 20                 | 24                   |                        | 0.0020                                    | 64   | Z                         |
| F1206HB25V024TM | 25                 | 24                   | 250 A at rated voltage | 0.0016                                    | 187  | S                         |
| F1206HB30V024TM | 30                 | 24                   | 300 A at rated voltage | 0.0012                                    | 270  | V                         |


1. Measured at  $\leq 10\%$  rated current and  $25^{\circ}\text{C}$  ambient.

2. Melting  $I^2t$  at 1000% of current rating.

3. Red Marking Character Code.


**SolidMatrix<sup>®</sup> Surface Mount Fuses**  
HB Series (High Current), 1206 Size

**Average Pre-arcing Time Curves:**

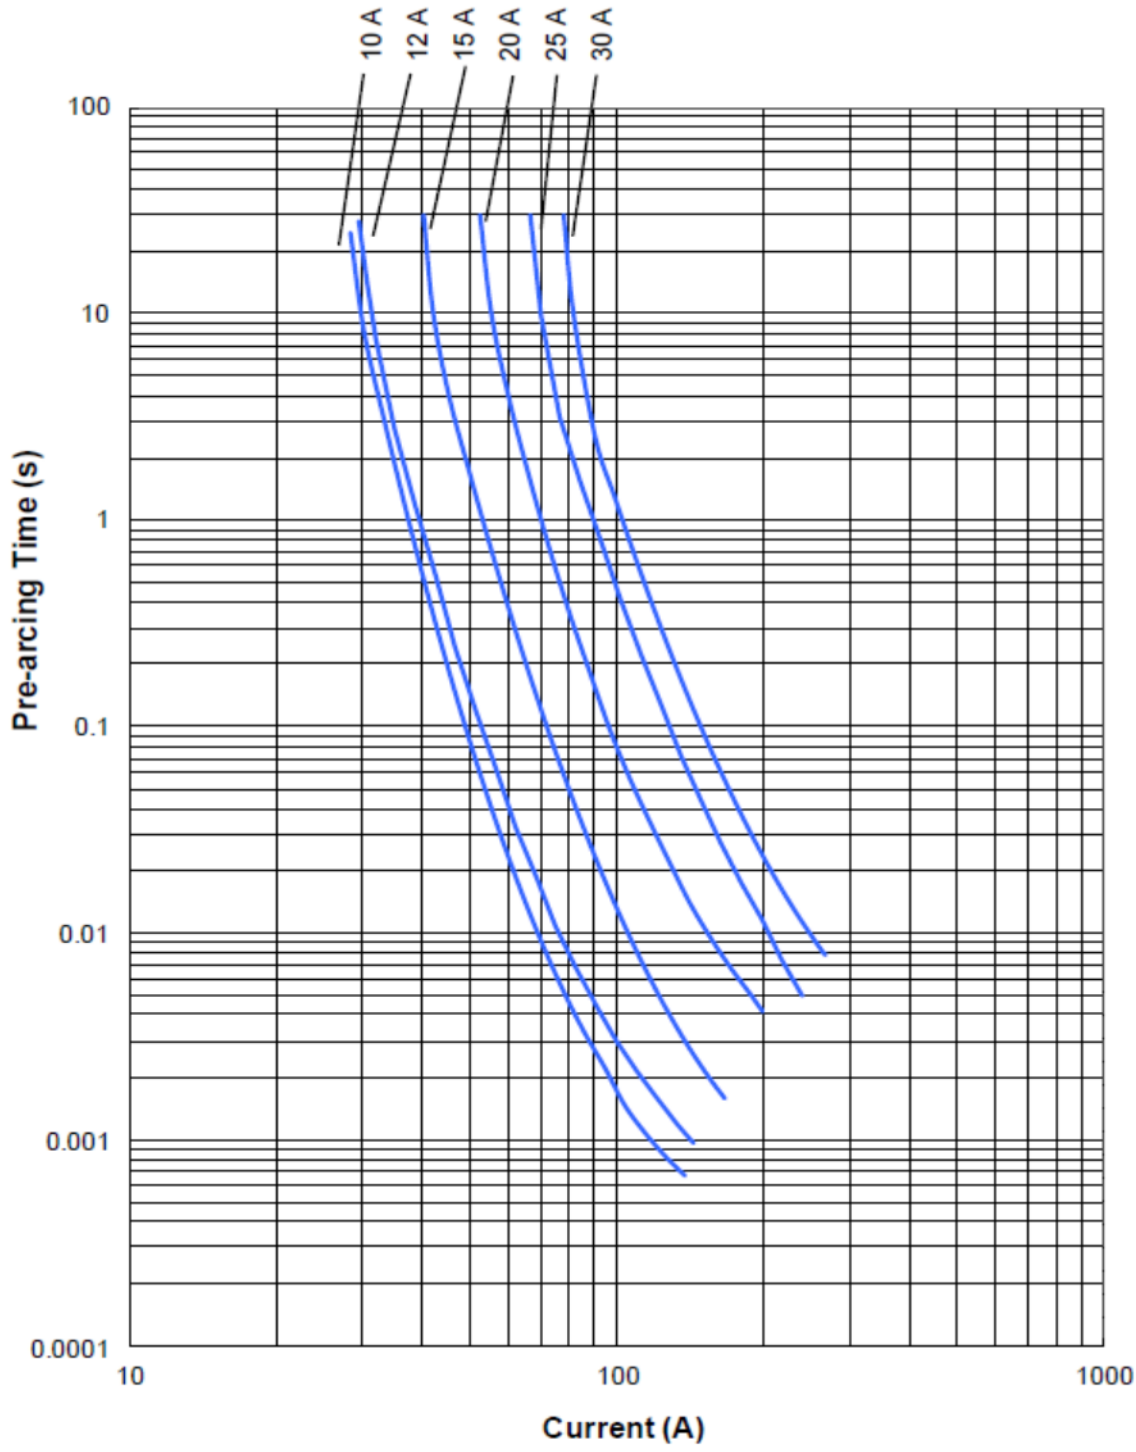

**SolidMatrix<sup>®</sup> Surface Mount Fuses**  
HB Series (High Current), 1206 Size

**Average  $I^2t$  vs.  $t$  Curves:**

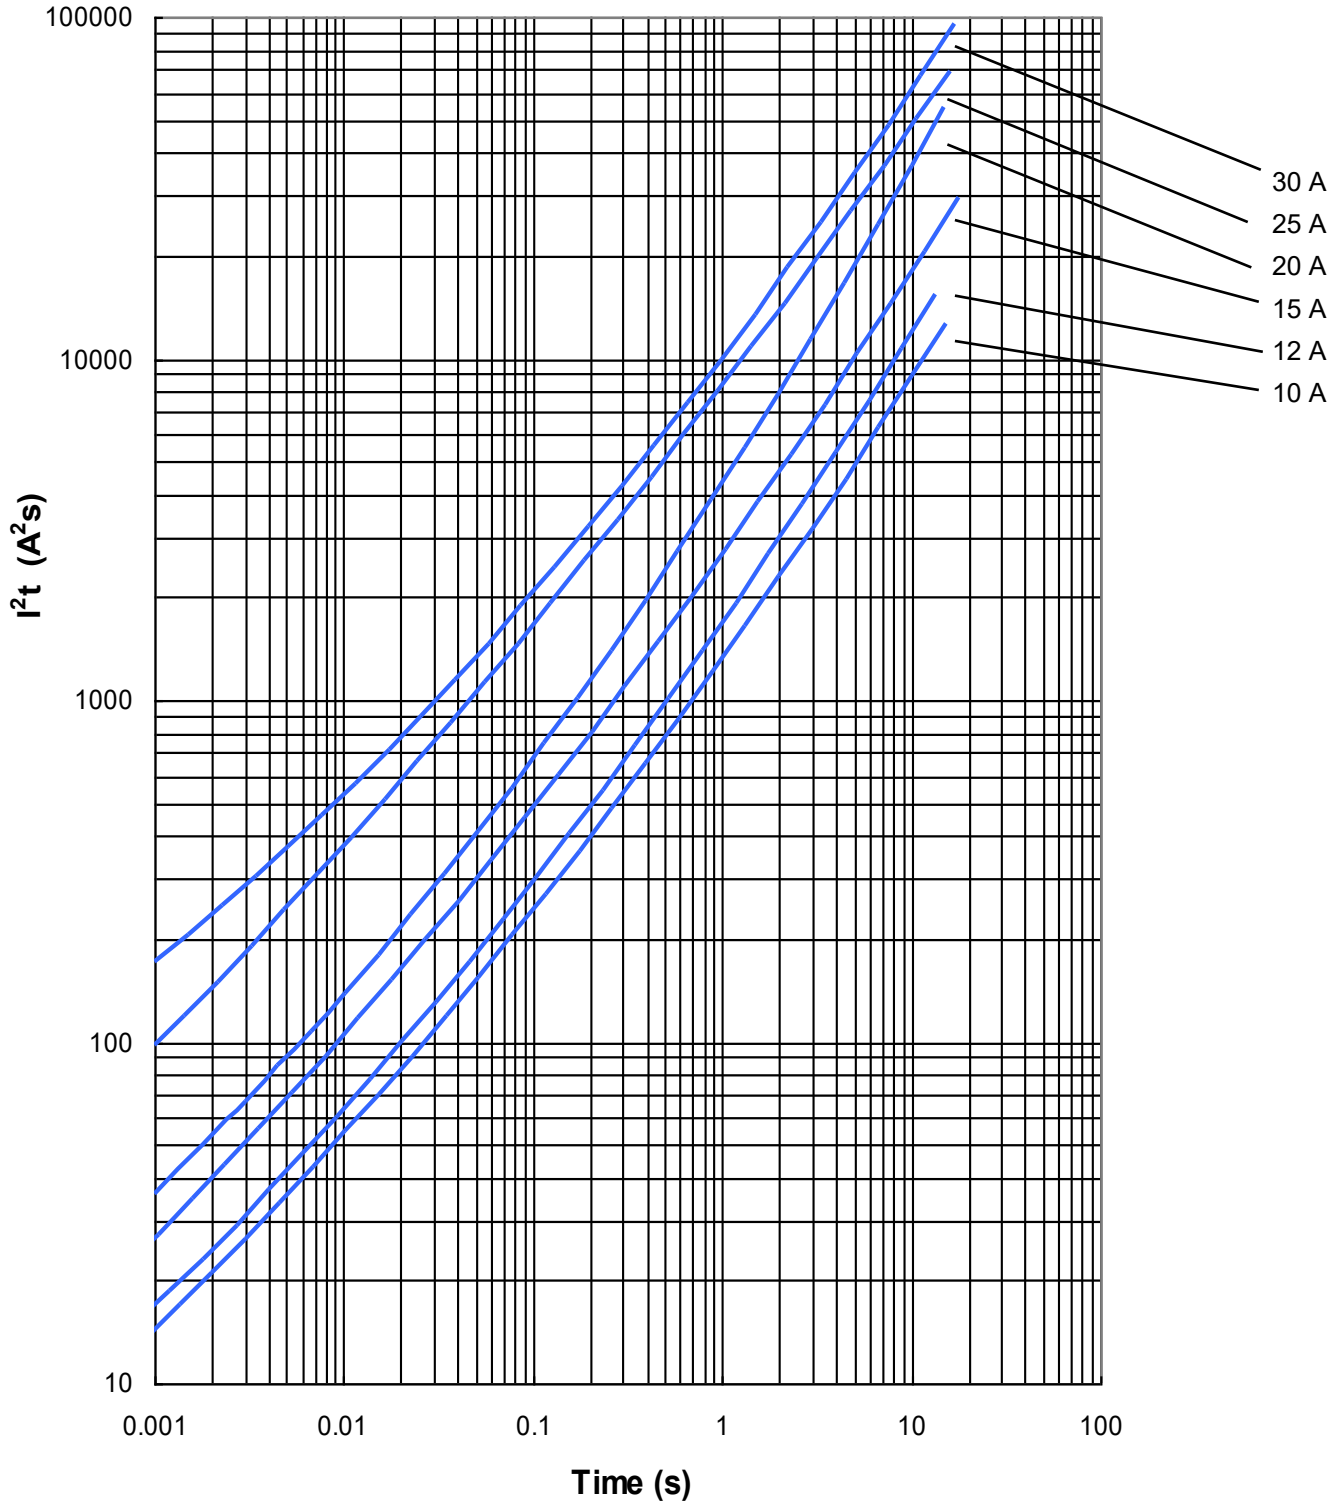

## SolidMatrix® Surface Mount Fuses

### Product Identification:

**F 0603 FA 1000 V032 T M**

(1) (2) (3) (4) (5) (6) (7)


- (1) **Product Code:** F— Chip Fuse
- (2) **Size Code:** Standard EIA Chip Sizes
- (3) **Series Code:** FA - Fast Acting, SB - Slow Blow, HI - High Inrush, FF - Very Fast Acting, HB - High Current
- (4) **Current Rating Code:** 1000 - 1000 mA (For HB, 10 - 10A)
- (5) **Voltage Rating Code:** V032 - 32 VDC
- (6) **Package Code:** T - Tape & Reel, B - Bulk
- (7) **Marking Code:** M - With Marking

**F 1206 HC 20A0 T M**

(1) (2) (3) (4) (5) (6)

- (1) **Product Code:** F— Chip Fuse
- (2) **Size Code:** L x W (inch), the first two digits-L (length), the last two digits-W (width)
- (3) **Series Code:** HC Series
- (4) **Current Rating Code:** 20A0—20.0A
- (5) **Package Code:** T - Tape & Reel, B - Bulk
- (6) **Marking Code:** M - With Marking

### Recommended Land Pattern:

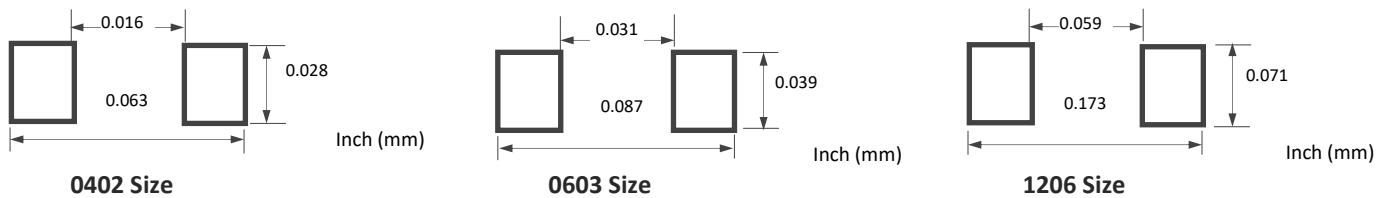

### Environmental Tests:

| No. | Test                      | Test Condition and Requirement   | Test reference         |
|-----|---------------------------|--|------------------------|
| 1   | Soldering heat resistance | DCR change $\leq \pm 10\%$ . No mechanical damage One dip at 260°C for 60 seconds  | MIL-STD-202 Method 210 |
| 2   | Solderability             | 245°C, 5 seconds, new solder coverage $\geq 95\%$  | MIL-STD-202 Method 208 |
| 3   | Thermal shock             | DCR change $\leq \pm 10\%$ . No mechanical damage 100 cycles between -65°C and +125°C  | MIL-STD-202 Method 107 |
| 4   | Moisture resistance       | 10 cycles, DCR change $\leq \pm 10\%$ , no excessive corrosion   | MIL-STD-202 Method 106 |
| 5   | Salt spray                | DCR change $\leq \pm 10\%$ . No excessive corrosion 48 hour exposure   | MIL-STD-202 Method 101 |
| 6   | Mechanical vibration      | DCR change $\leq \pm 10\%$ . No mechanical damage. 0.4" D.A. or 30 G between 5 – 3000 Hz                                     | MIL-STD-202 Method 204 |
| 7   | Mechanical shock          | DCR change $\leq \pm 10\%$ . No mechanical damage. 1500 G, 0.5 ms, half-sine shocks  | MIL-STD-202 Method 213 |
| 8   | Life                      | 80% rated current (75% for <1A), 2000 hours, ambient temperature (from +20°C to 30°C), voltage drop change within $\pm 10\%$ | Refer to AEM QIQ106    |

Moisture Sensitivity Level 1

## SolidMatrix<sup>®</sup> Surface Mount Fuses

### Electrical Specification:

#### Clearing Time Characteristics:

Same as specified on the Short Form Data Sheet

#### Insulation Resistance after Opening:

20,000 ohms typical when cleared with rated voltage applied. Fuse clearing under low voltage conditions may result in lower after clearing insulation resistance values. (Note: Under normal fault conditions (low or rated voltage conditions), AEM SolidMatrix fuses provide sufficient after clearing insulation resistance values for circuit protection.)

#### Current Carrying Capacity:

100% rated current at +25°C ambient for 4 hours minimum when evaluated per MIL-PRF-23419

#### Interrupt Ratings:

Same as specified in this catalog.


### Fuse Selection and Temperature De-rating Guideline:

The ambient temperature affects the current carrying capacity of fuses. When a fuse is operating at a temperature higher than 25°C, the fuse shall be “de-rated”.

To select a fuse from the catalog, the following rule may be followed:

Catalog Fuse Current Rating = Nominal Operating Current / 0.75 / % De-rating at the maximum operating temperature.


Example: At maximum operating temperature of 65°C, % De-rating is 90%. The nominal operating current is 4 A. The current rating for fuse selected from the catalog shall be:  $4 / 0.75 / 90\% = 5.9$  or 6 A. Specifications and descriptions in this literature are as accurate as known at the time of publish, but are subject to change without notice.

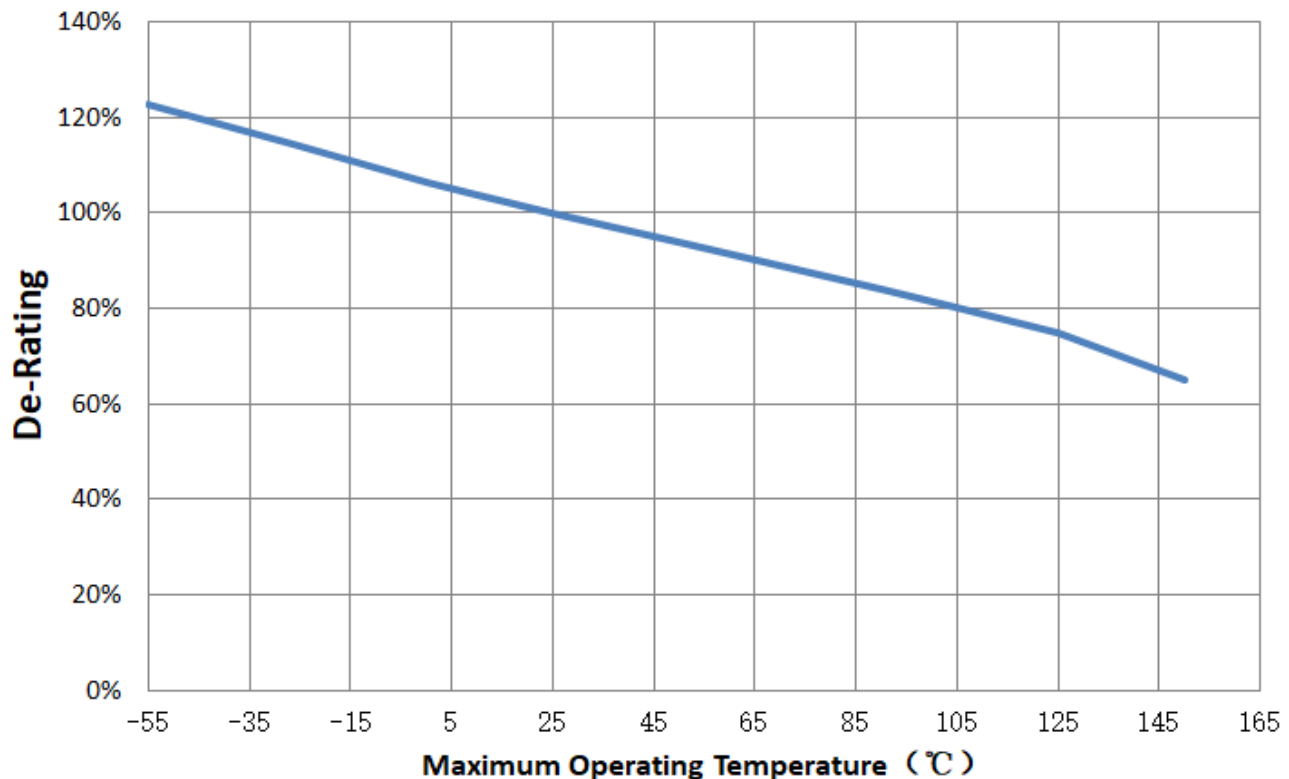

## SolidMatrix® Surface Mount Fuses

### Soldering Temperature Profile:


\* Recommended Temperature Profile for Reflow Soldering

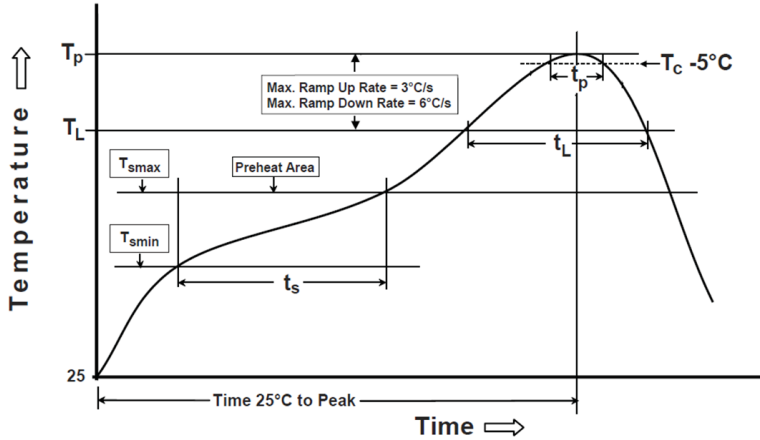

| Profile Feature  | Pb-Free Assembly |
|--|------------------|
| <b>Preheat/Soak</b>  |                  |
| Temperature Min ( $T_{smin}$ )   | 150°C            |
| Temperature Max ( $T_{smax}$ )   | 200°C            |
| Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )   | 60~120 seconds   |
| Ramp-up rate ( $T_L$ to $T_p$ )  | 3°C/second max.  |
| Liquidous temperature ( $T_L$ )  | 217°C            |
| Time ( $t_L$ ) maintained above $T_L$  | 60~150 seconds   |
| Peak package body temperature ( $T_p$ )  | 260°C            |
| Time ( $t_p$ )* within 5°C of the specified classification temperature ( $T_c$ )                       | 30 seconds *     |
| Ramp-down rate ( $T_p$ to $T_L$ )  | 6°C/second max.  |
| Time 25°C to peak temperature  | 8 minutes max.   |
| * Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum |                  |

\* Recommended Temperature Profile for Wave Soldering

#### Recommended Temperature Profile for Wave Soldering

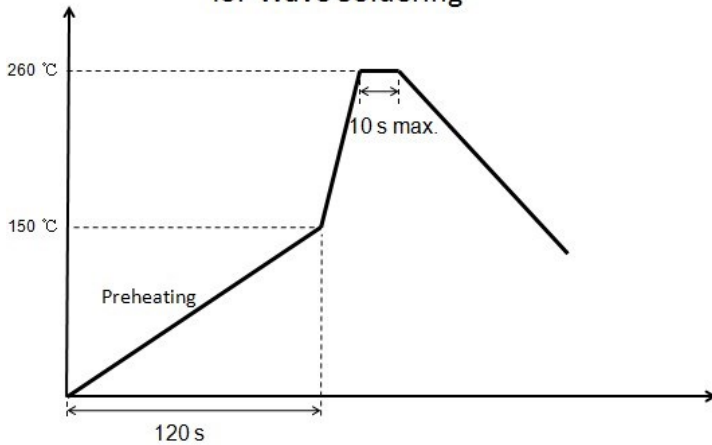

Notice: Wave Soldering is suitable for 1206 and 0603 size.

### Packaging:

| Chip Size     | Parts on 7 inch (178 mm) Reel |
|---------------|-------------------------------|
| 0402 (1005)   | 10,000                        |
| 0603 (1608)   | 4,000                         |
| 0603FF (1608) | 6,000                         |
| 1206 (3216)   | 3,000                         |

## Disclaimer

*Specifications are subject to change without notice. AEM products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive, aerospace, medical, life-saving applications, or any other application which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property) not expressly set forth in applicable AEM product documentation. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Warranties granted by AEM shall be deemed void for products used for any purpose not expressly set forth in applicable AEM product documentation. AEM shall not be liable for any claims or damages arising out of products used in applications not expressly intended by AEM as set forth in applicable AEM product documentation. The sale and use of AEM products is subject to AEM terms and conditions of sale. Please refer to AEM's website for updated catalog and terms and conditions of sale.*



---

**AEM Components (Suzhou) Co., Ltd**

**461 Zhongnan Street,  
China-Singapore Suzhou Industrial Park  
Jiangsu, P. R. China, 215026**

Tel: 86-512-6258-0028

Fax: 86-512-6258-0018

Email: [marketing@aemchina.com](mailto:marketing@aemchina.com)

**AEM Components (USA), Inc.**

**6670 Cobra Way, San Diego, CA 92121, USA**

Tel: 1-858-750-6100

Fax: 1-858-481-1123

Email: [sales@aemcomponents.com](mailto:sales@aemcomponents.com)