




TOP VIEW



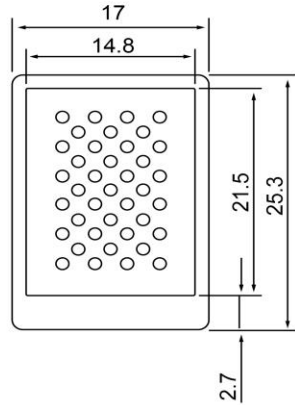

SIDE VIEW



BOTTOM VIEW



| Specifications | | | Notes | Revision History | | | | | | | |
|--|--------------|--------|--|---|---------------------------|-----------|-------------------|-----------|------|-----------|------|
| Description | Value | Unit | | Version | Description | Date | Approved | | | | |
| Shape | Rectangle | | 1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS | 1 | Released from Engineering | 3/24/2015 | J.S. | | | | |
| Resonant Frequency | 800 | (Hz) | | | | | | | | | |
| Frequency Range | 800 ~ 20,000 | (Hz) | | | | | | | | | |
| SPL @ 10cm | 89 | (dBA) | | | | | | | | | |
| Capacitance | 800 | (nF) | | | | | | | | | |
| Diaphragm Material | Piezo | | | | | | | | | | |
| Rated Voltage | 7 | (Vrms) | | | | | | | | | |
| Max Input Voltage | 9 | (Vrms) | | | | | | | | | |
| Mount Type | Flush Mount | | | | | | | | | | |
| Operating Temperature | -20 ~ +70 | °C | | | | | | | | | |
| Storage Temperature | -30 ~ +85 | °C | | | | | | | | | |
| Weight | 2 | (g) | | | | | | | | | |
|  | | | |  | | | SZ250808-1 | | | | |
| | | | | | | | | | | Drawn by | Date |
| | | | | | | | A.B. | 3/14/2015 | P.D. | 3/23/2015 | J.S. |

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.