




Technical Data

22.01.2024

Shrinkable markers "Ladder Style", thermal transfer
TLFX DS – 2:1 Rail Limited Fire Hazard "Ladder Style"

TLFX64DS-2x25WH

Article Number 553-60023

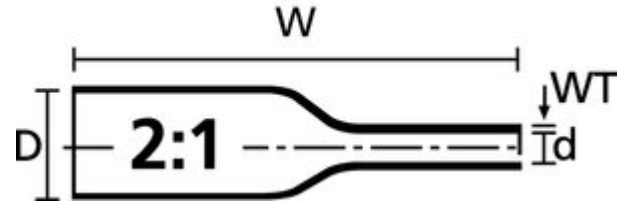

Material: Polyolefin, cross-linked (PO-X)

Colour: White (WH)

Supplied \varnothing D min.: 6.4 mm

Recov. \varnothing d max.: 3.2 mm

Wall (WT): 0.725 mm

Shrink Ratio: 2:1

Min. Shrink Temperature - °C: +100 °C

Test Method

Flammability: UL 224

Operating Temperature : -55 °C to +105 °C

Dielectric Strength: 20 kV/mm

ASTM D2671

Tensile Strength: 11 MPa

ASTM D2671

Elongation at break: 200 %

ASTM D2671

Longitudinal Change After Shrinkage: -5% max.

UL 224

We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved



Technical Data

22.01.2024

Shrinkable markers "Ladder Style", thermal transfer
TLFX DS – 2:1 Rail Limited Fire Hazard "Ladder Style"

UV-Stabilised (Yes/No): No
Print Method: thermal transfer print
Print Method (Alternative): laser beam print
Application Tool: H6100, TT431, TT4030, TT4030DS
Shelf Life: 5 years

HF ✓ **LFH** ✓ **RoHS** ✓ **EN 45545-2** **ASTM**

We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved