






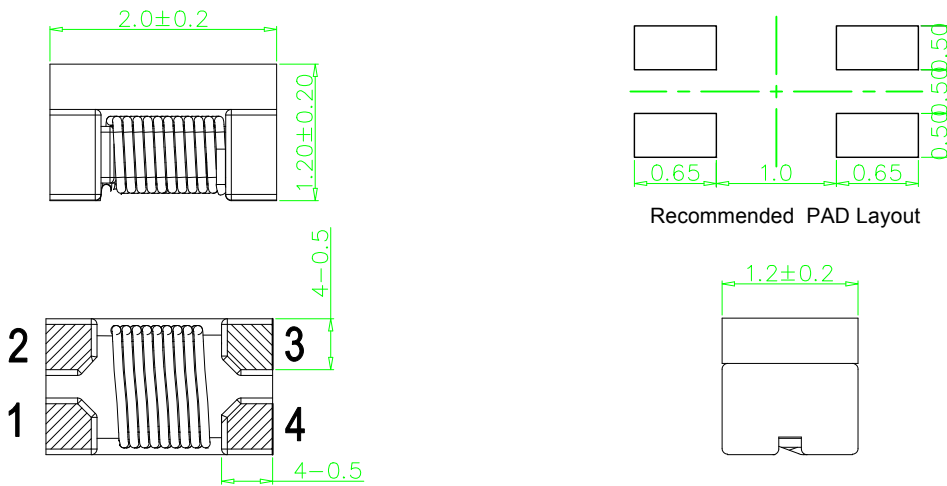
-  High Common Mode Impedance at High Frequency.
-  Excellent Noise Suppression Performance.
-  Small Size and Low Profile, Surface Mount Type.
-  Operating Temperature Range: -40°C to +85°C.
-  RoHS Compliant.



## Electrical Specifications @25°C


Part Number	Common Mode Impedance	Insulation Resistance	Rated Current	DC Resistance	Rated Voltage	Withstand Volt
	Ω, @100MHz	MΩ Min	mA Max	Ω Max	Vdc Max	Vdc Max
CC2012A-801	800±25%	10	300	0.88	50	125

## MECHANICAL DIMENSIONS (unit:mm)



Unless otherwise specified all tolerances are:±0.25mm

## SCHEMATIC

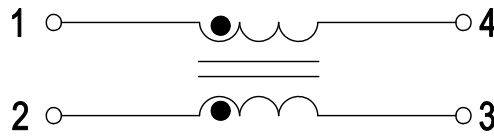

## Impedance-Frequency Characteristics (Typical)

