
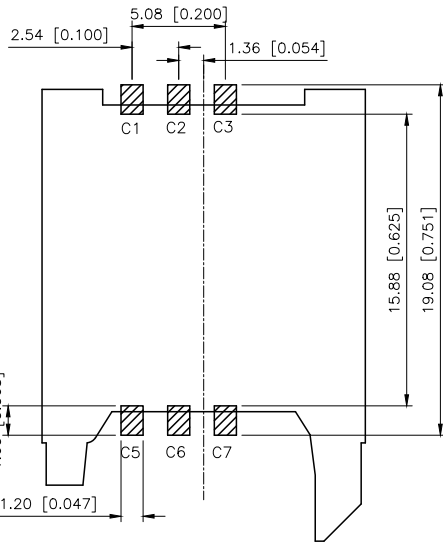


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.05.15 | 阿树     |

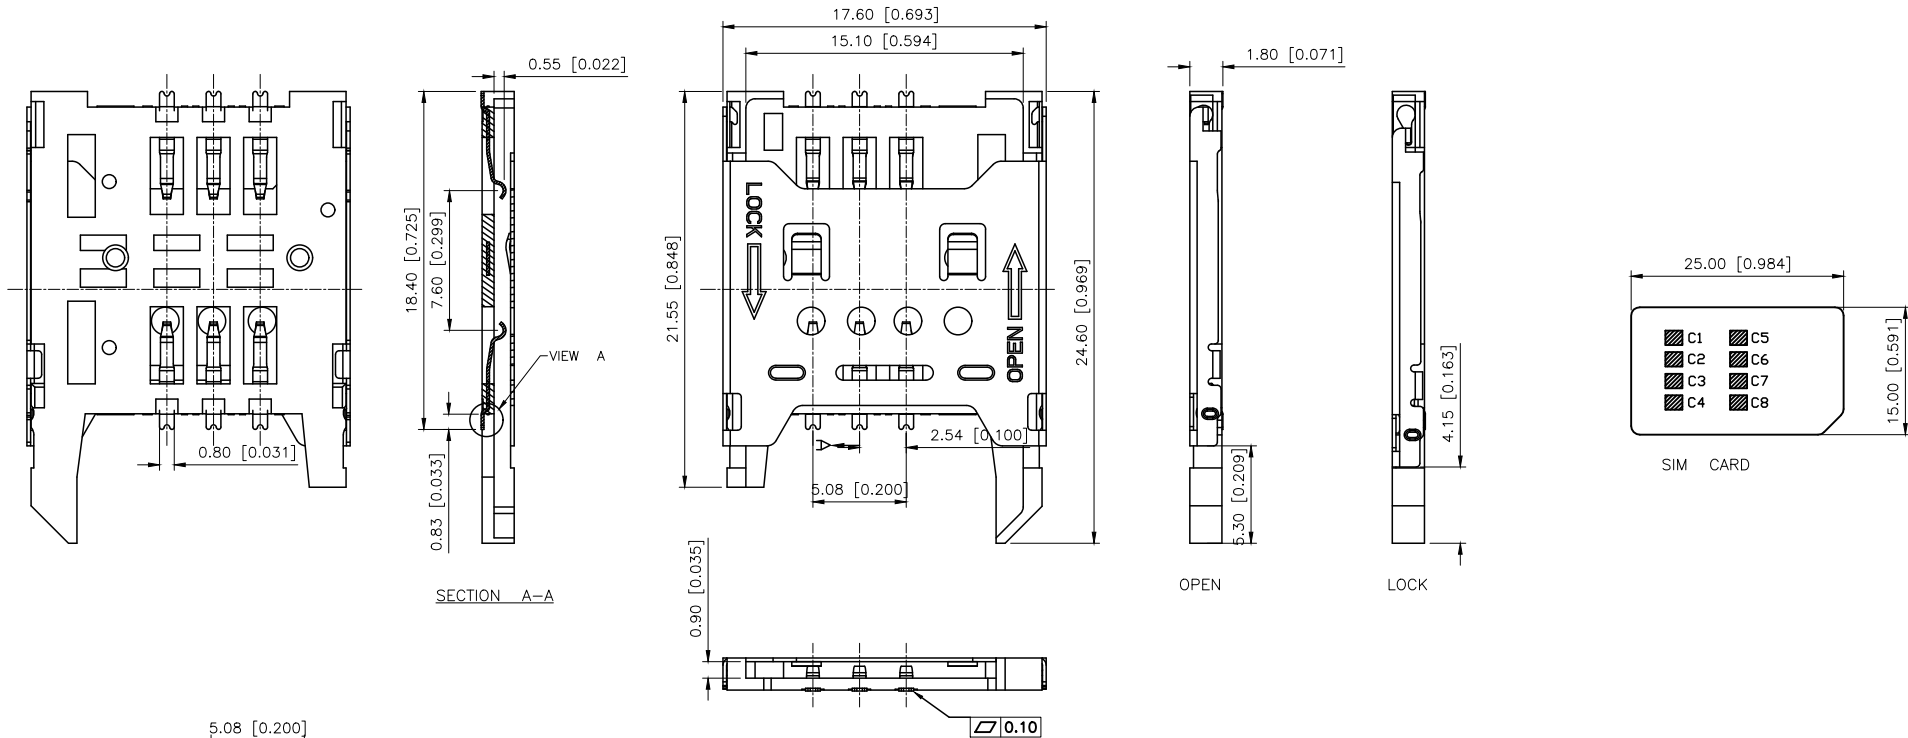

#### NOTES:

##### 1.MATERIAL:

- 1)HOUSING MATERIAL:THERMOPLASTIC UL94V-0;COLOR:BLACK
- 2).CONTACT MATERIAL:C2680,T=0.15mm
- 3).SHELL MATERIAL:STAINLESS STEELT=0.20mm

##### 2.FINISH:

- 1)CONTACT FINISH:30U"MINNICKEL UNDER PLATEDPLATED G/F"au ON CONTACT AREA;PLATED GOLD FLASH ON SOLDER AREA.

##### 3.ELECTRICAL SPECIFICATIONS:

- 1)VOLTAGE RATING:12VAC
- 2).CURRENT:1 AMPERES MAX. PER CONTACT
- 3)OPERATION TEMPERATURE RANGE:-25 ~+70
- 4).CONTACT RESISTANCE:60MΩ MAX.
- 5)INSULATION RESISTANCE: 1000MΩ MIN
- 6).DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
- 7).MAX PROCESSING TEMP:260 for 30 SECONDS

| PIN NO. | PIN NAME                |
|---------|-------------------------|
| C1      | Supply Voltage Vcc      |
| C2      | Reset (RST)             |
| C3      | Clock (CLK)             |
| C5      | Ground                  |
| C6      | Programming Voltage Vpp |
| C7      | I/O                     |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |             |               |
|----------|----|-------------|---------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE:   |
| CHECKED  |    | UNIT: mm/in | SIM CARD CONN |
| APPROVED |    | SIZE: A4    | PART NO.:     |
|          |    |             | XKSIM-008     |
|          |    |             | DWG NO.:      |

| SCALE | PAGE | REVISION |
|-------|------|----------|
| N/A   | 1/1  | A1       |