

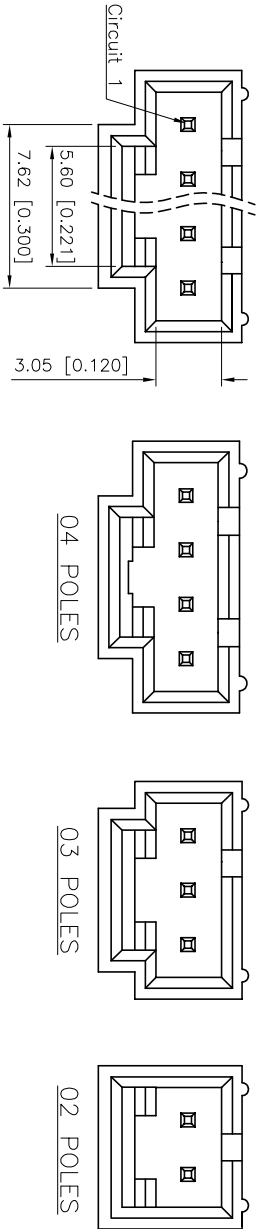


REVISIONS				DATE	DESIGN
REV.	ECN NO.	LOCATION	DESCRIPTION	INITIAL RELEASE	2024.02.29
A0	N/A				

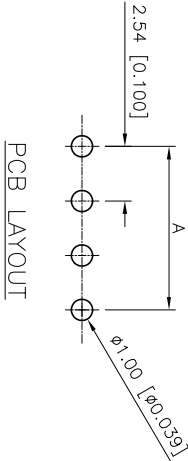

- Specifications (规格) :
- Voltage rating (额定电压) : 250V AC DC
 - Current rating (额定电流) : 3.0A AC/DC
 - Withstanding voltage (耐压值) : $\geq 1500V$ AC/minute
 - Insulation resistance (绝缘电阻) : 1000M Ω Min
 - Contact resistance (绝缘电阻) : 20m Ω Max
 - Temperature range (使用温度) : -25 $^{\circ}C$ ~ +85 $^{\circ}C$

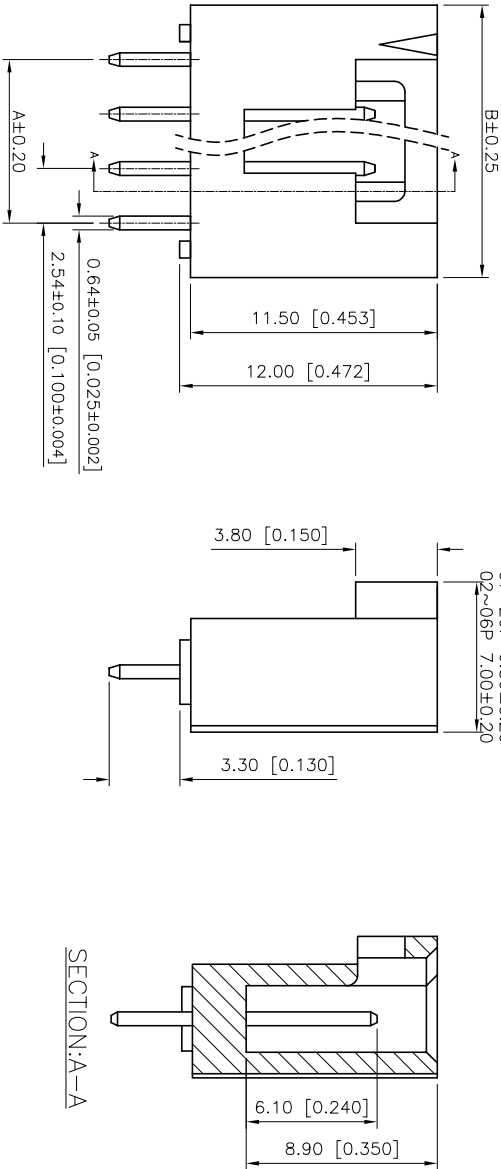

PART NO.:


X9556 W V-XX-NO VO1

- ① Series No
 - ② Category: W-Wafer
 - ③ Welding Board Angle: V-Straight 180 $^{\circ}$
 - ④ Row No-Pin: XX-02P*20P
 - ⑤ Material: NO-PA66 UL94V-0
 - ⑥ Plating: V-Gold Plated
- 01-Gold Flash: 02-2u" Au; 03-3u" Au;
05-5u" Au; 10-10u" Au; 15-15u" Au;

NUMBER OF POSITIONS	DIM.A	DIM.B	NUMBER OF POSITIONS	DIM.A	DIM.B
02	2.54	7.62	12	27.94	33.02
03	5.08	10.16	13	30.48	35.56
04	7.62	12.70	14	33.02	38.10
05	10.16	15.24	15	35.56	40.64
06	12.70	17.78	16	38.10	43.18
07	15.24	20.32	17	40.64	45.72
08	17.78	22.86	18	43.18	48.26
09	20.32	25.40	19	45.72	50.80
10	22.86	27.94	20	48.26	53.34
11	25.40	30.48			

ANGULAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

X9556WV-XX-NOV01	PA66 UL 94V-0	BRASS	Au PLATED	X9556H
PART NO.	MATERIAL	MATERIAL(PIN)	FINISH(PIN)	Suitable XKB Terminiol

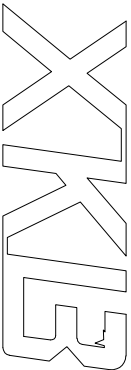

DESIGN	桑 葢	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	2.54mm Crimp Style Connector
APPROVED		SIZE: A4	PART NO.: X9556WV-XX-NOV01
		DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0