




## Heyco® ST Lockit™ Strain Relief Bushings

Snap onto **Round Cables** for Faster Assembly into **Rectangular Mounting Holes** – *Semi-Automatic Equipment Available*

- **Assembly friendly!** Independent of insertion into the panel, Lockit Strain Reliefs **self-lock** onto the cable. Preassemble off line for final assembly at a later time or remote location, for lower installed cost!
- Lockit Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Rectangular design eliminates the possibility of part rotation under forces of twist.
- Lockit's three finger design securely anchors into panels as thin as .032" (0,8 mm) and as thick as .157" (4,0 mm) for a neat, clean appearance. Five locking steps accommodate a wide range of panel thicknesses. Low profile head satisfies design aesthetics!
- Heyco's automated Pre-Assembly Equipment speeds assembly of the Lockit onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.

UL Type	WILL FIT THESE CABLES AWG/ Conductors	Approximate Size in. mm.		PANEL DIMENSIONS Mounting Hole Size in. mm.		Thickness in. mm.		ST LOCKIT STRAIN RELIEF for Faster Assembly		Corresponding Mounting Hole Plug	
								PART NO.	DESC.	PART NO.	DESC.
See table on page 4-10	various	.220 - .290	5,6 - 7,4	.453 x .512	11,5 x 13,0	.032	0,8	<b>1832</b>	<b>1833</b>	ST 101N	1890 RP 115-130
						.040	1,1				
						.048	1,2				
						.063	1,6				
						.099	2,5				
See table on page 4-10	various	.290 - .360	7,4 - 9,1	.689 x .689	17,5 x 17,5	.032	0,8	<b>1836</b>	<b>1837</b>	ST 201N	1892 RP 175-175
						.063	1,6				
						.099	2,5				
						.126	3,2				
						.157	4,0				
See table on page 4-10	various	.355 - .420	9,0 - 10,6	.689 x .689	17,5 x 17,5	.032	0,8	<b>1848</b>	<b>1849</b>	ST 301N	1892 RP 175-175
						.063	1,6				
						.099	2,5				
						.126	3,2				
						.157	4,0				

Standard color black. Consult Heyco for white and other colors.

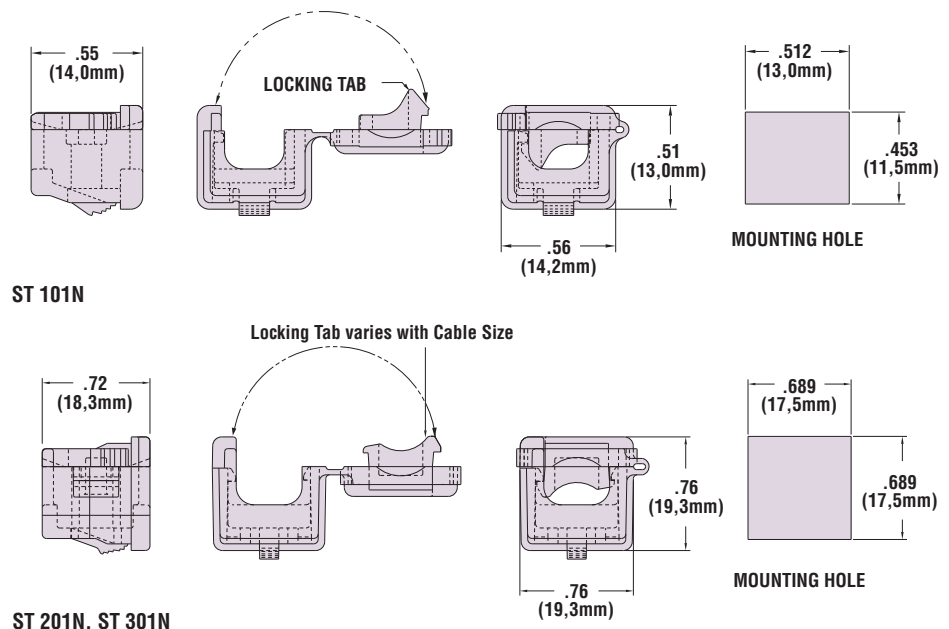

Quick  
Specs

Material  
Certifications

Nylon 6/6

Recognized under the Component Program of Underwriters' Laboratories File E15331

Certified by the Canadian Standards Association File 8919

Flammability Rating  
Temperature Range

94V-2

-.04°F (-18°C) to 221°F (105°C).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[1848](#) [1832](#) [1836](#) [1833](#) [1837](#) [1849](#) [1848AA](#)