

# Component-to-wire connectors

## Sicma



### 3 way female housings for 1.5 mm terminals

#### Features

- High density, reduced size housings
- Terminal position assurance (T.P.A.)
- Several colour codings available



#### Performance characteristics

- Temperature range:  
from -40°C to +125°C
- Contact retention force:  
> 65 N for 3 pos.
- Contact insertion force: < 5 N
- Connector mating force: < 30 N

#### Construction

- Housing material: PBT

#### Tooling

- T.P.A. removal tool: 210S043
- Terminal removal tool: 210S041


#### Connector compatibility

- Usable terminals:
  - Sicma-2 1.5 mm female terminals
  - Sicma-3 1.5 mm female terminals

Part Numbers	No. of position	Terminal size	Colour
210 PC032S9007	3	1.5 mm	White
210 PC032S0007	3	1.5 mm	Black
210 PC032S8007	3	1.5 mm	Grey
210 PC032S6007	3	1.5 mm	Blue
210 PC032S7007	3	1.5 mm	Violet

### 3 way female housings for 1.5 mm terminals

### **Dimensional characteristics**

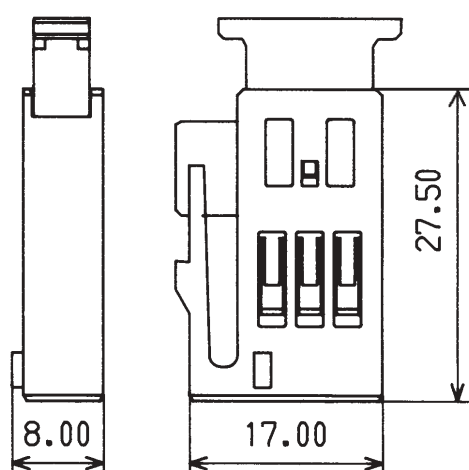

Notes:

## Codings


BLUE



GREY



BLACK



WHITE



VIOLET

