
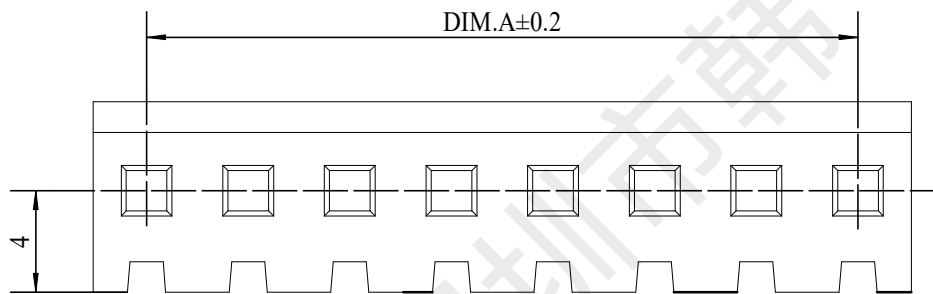
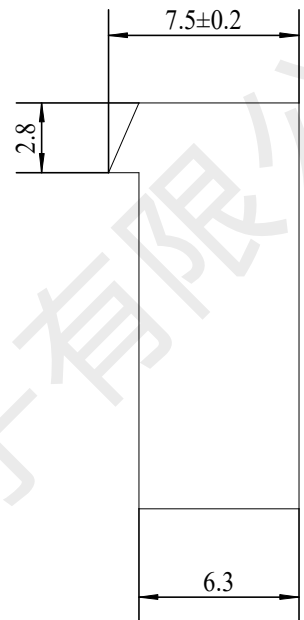


| REV. | EC# | DESCRIPTION | DATE | DRAWN | CHECK | APPROVED |
|------|-----|-------------|------------|-------|-------|----------|
| 1.00 | | 初版发行 | 2020-05-28 | | | |
| | | | | | | |

| | | |
|----------------|--------|--------|
| 9P | 31.68 | 35.92 |
| 8P | 27.72 | 31.96 |
| 7P | 23.76 | 28 |
| 6P | 19.8 | 24.04 |
| 5P | 15.84 | 20.08 |
| 4P | 11.88 | 16.12 |
| 3P | 7.92 | 12.16 |
| 2P | 3.96 | 8.2 |
| NUMBER OF PINS | DIM. A | DIM. B |

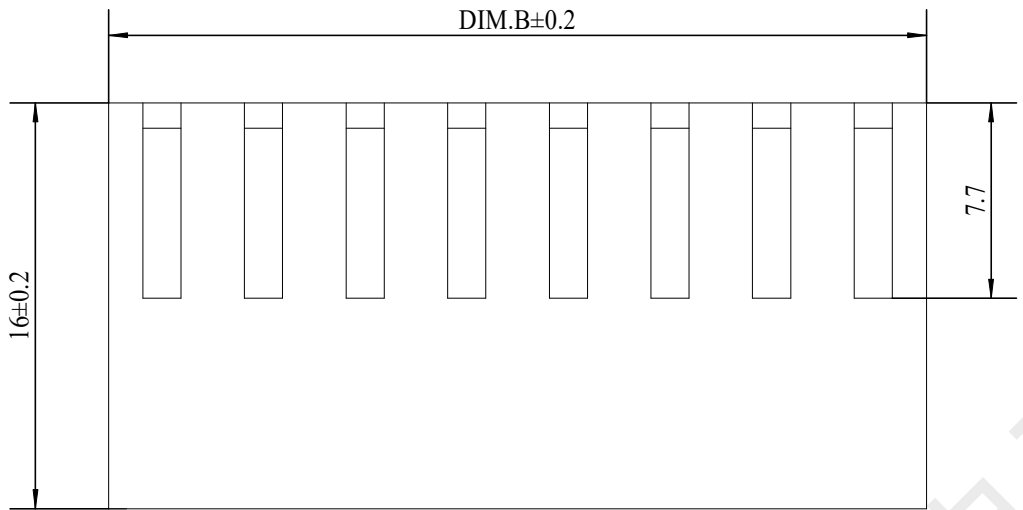

适用线规: AWG 26#~18#
 温度范围: -25℃~85℃
 额定电压: 250V AC/DC
 额定电流: 7A
 接触电阻: ≤0.01Ω
 绝缘电阻: ≥1000MΩ
 耐压: 1500V AC/minute

技术要求:

- 1) 材质:见附表;
- 2) 电镀:见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

| 1 | Housing | 1 PCS | 材质:PA66 (UL94V-0),颜色:本色 |
|-----|---------|-------|-------------------------|
| NO. | NAME | Q' TY | DESCRIPTION |

韩下 HANXIA 深圳市韩下电子有限公司

| | | | | | | |
|----------|-----|------------|------------------|--------------|------------|--------|
| DRAW : | 黄彬 | 2020-05-28 | TITLE: | HX CH3.96-3P | DRAW NAME: | 压线端子胶壳 |
| DESIGN: | | | SERIES: | 1501 SERIES | DRAW NO. | |
| CHECK: | 张伟 | 2020-05-28 | P/N: | | UNIT: | SHEET: |
| APPROVED | 罗小春 | 2018-05-28 | CUSTOMER DRAWING | REV. 1.00 | SCALE | N/A |
| | | | | UNIT: | mm | SHEET: |
| | | | | | | 1/1 |

| GENERAL TOLERANCES | | | |
|--------------------|-------|--------|--------|
| DIM | TOL | DIM | DEG |
| X. | | X° | ±3.00° |
| X.X | ±0.35 | X.X° | ±2.00° |
| X.XX | ±0.25 | X.XX° | ±1.00° |
| X.XXX | ±0.15 | X.XXX° | |