


NOTE:

1.MATERIAL:

- a.HOUSING:PBT GLASS FIBRE UL94V-0:
- b.CONTACT: BRASS T=0.25mm
(SURFACE PLATING: Au1u"+Sn80-100u"+Ni60u")
- c.SHEEL:SPCC-SD-OILED.T=0.3mm
(SURFACE PLATING: Cu50-80u"; Ni50-80u";

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE MIN LEVEL
- d.OPERATING TEMPERATURE: -55'-85'

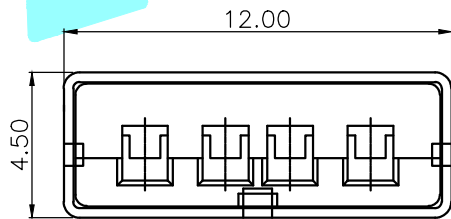

③	Shell	—	1	SPCC	—	—
②	Contact	—	4	BRASS	—	—
①	Housing	—	1	PBT	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 ELECTRONICS CO.,LTD	
DRAWN	QFENG.XU	2014/6/17				
CHECKED			TITLE:		USB CONNECTOR	
APPROVALS			PART NO.		U-G-04DD-W-4	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20	±2'	DRAWING NO.		SHEET 1 OF 1
	~ 5	±0.15				

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.