


TE Internal #: 2355146-1 Wire-to-Panel, 3 Position, 40 mm [1.57 in] Centerline, Sealable, Orange, Power, Panel Mount, -40 – 140 °C [-40 – 284 °F] View on TE.com >



Connectors > Automotive Connectors > Automotive Housings

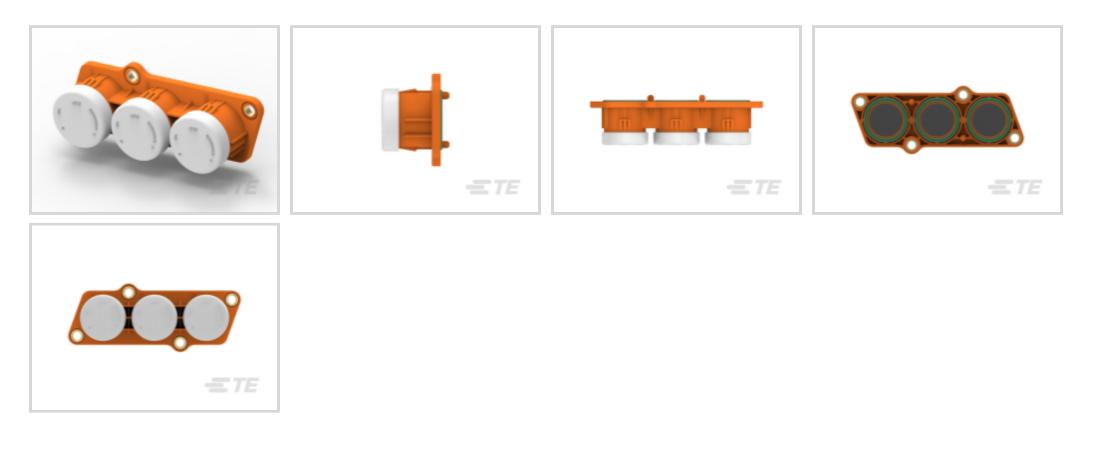

Connector System: Wire-to-Panel

Number of Positions: 3

Centerline (Pitch): 40 mm [1.57 in]

Sealable: Yes

Number of Rows: 1

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Circular
Connector System	Wire-to-Panel
Sealable	Yes
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	1500 VAC
Nominal Voltage Architecture	1000 V
Body Features	
Primary Product Color	Orange
Mechanical Attachment	
Mating Alignment Type	Not Keyed
Mating Alignment	Without

Wire-to-Panel, 3 Position, 40 mm [1.57 in] Centerline, Sealable, Orange, Power, Panel Mount, -40 – 140 °C [-40 – 284 °F]



Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	PA GF
Centerline (Pitch)	40 mm[1.57 in]
Usage Conditions	
Operating Temperature (Max)	140 °C[284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]
Operation/Application	
Circuit Application	Power
Other	
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (2.75% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability
Product Compliance Disclaimer	


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides


Wire-to-Panel, 3 Position, 40 mm [1.57 in] Centerline, Sealable, Orange, Power, Panel Mount, -40 – 140 °C [-40 – 284 °F]



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

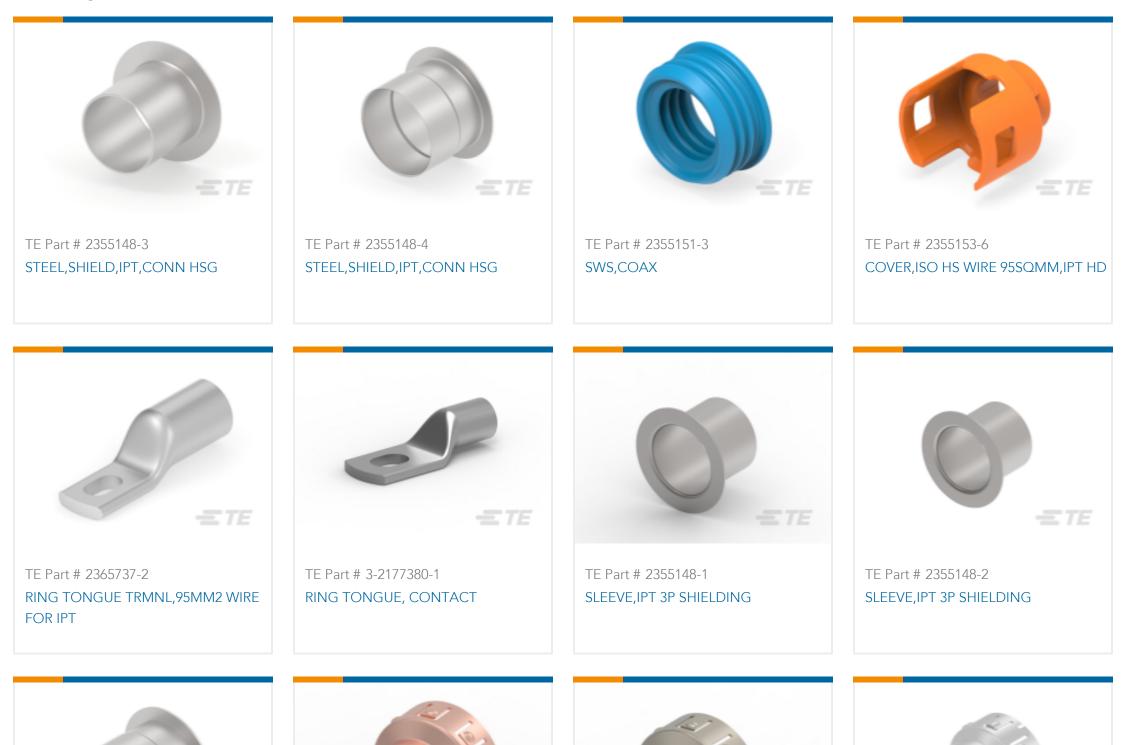

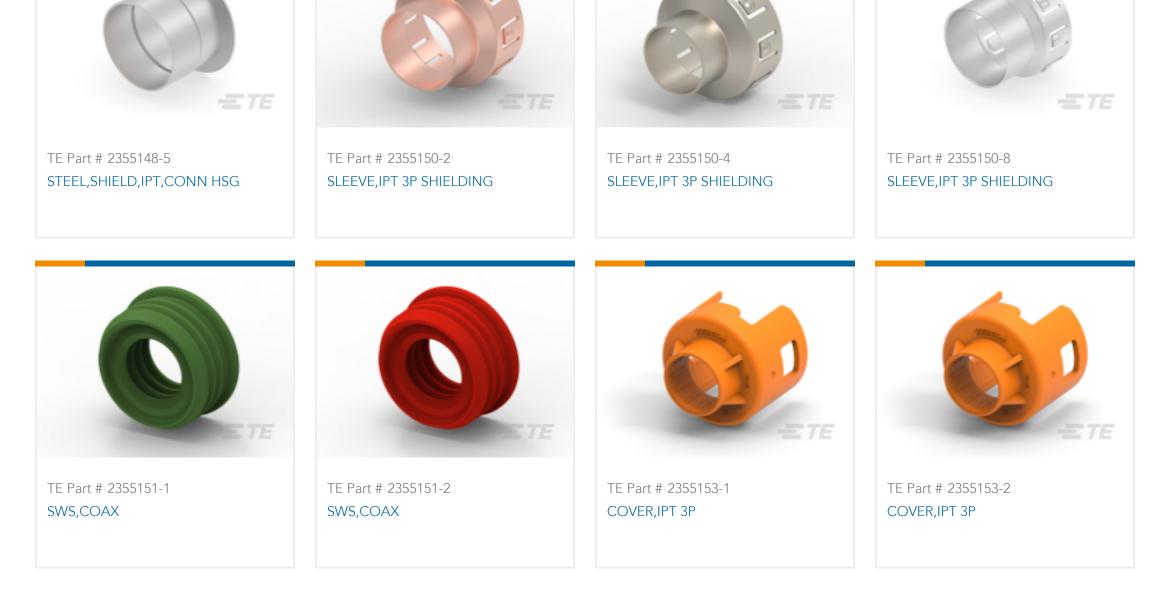


Wire-to-Panel, 3 Position, 40 mm [1.57 in] Centerline, Sealable, Orange, Power, Panel Mount, -40 – 140 °C [-40 – 284 °F]





Customers Also Bought

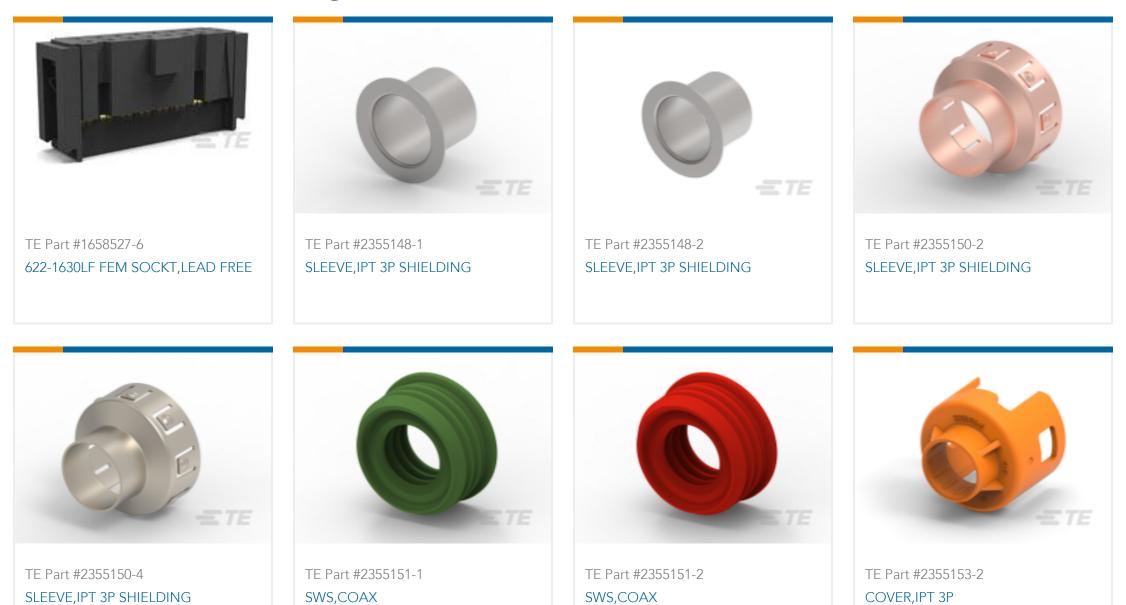

TE Part #2365737-1		
RING TONGUE TRMNL,70MM2 WIRE FOR IPT		

Documents

Product Drawings 3POS,IPT,RING TONGUE HSG ASSY,SLD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2355146-1_B.2d_dxf.zip

Wire-to-Panel, 3 Position, 40 mm [1.57 in] Centerline, Sealable, Orange, Power, Panel Mount, -40 – 140 °C [-40 – 284 °F]



English

Customer View Model ENG_CVM_CVM_2355146-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2355146-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages HIVONEX CONNECTORS & CHARGING SOLUTIONS

English

Product Specifications Application Specification

English