


Description


Ruilon combines its patented GDT and a Metal Oxide Varistor (MOV) to create a new and innovative KOV® Series Composite Surge Protective Unit. By combining the best features of both MOV and GDT technologies, the KOV® Series achieves high performance as a long life protector with low capacitance and, most importantly, very low leakage. The KOV® Series is ideally suited for any number of AC and DC power applications where a high level of performance is required over time.

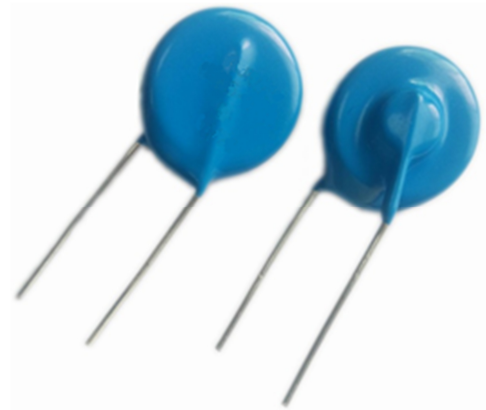

Features

- I Hybrid design
- I Low leakage
- I Bidirectional protection
- I Low capacitance
- I RoHS and REACH compliant

Circuit Diagram

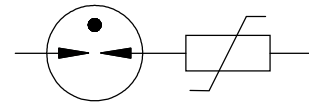

Applications


AC Line Protection

- I White goods
- I Power line communications
- I Smoke alarm systems
- I High value consumer goods
- I UL 1449 SPD 4th edition

DC Line Protection

- I Solar inverters
- I Power supplies
- I Distribution systems

Part Number Code

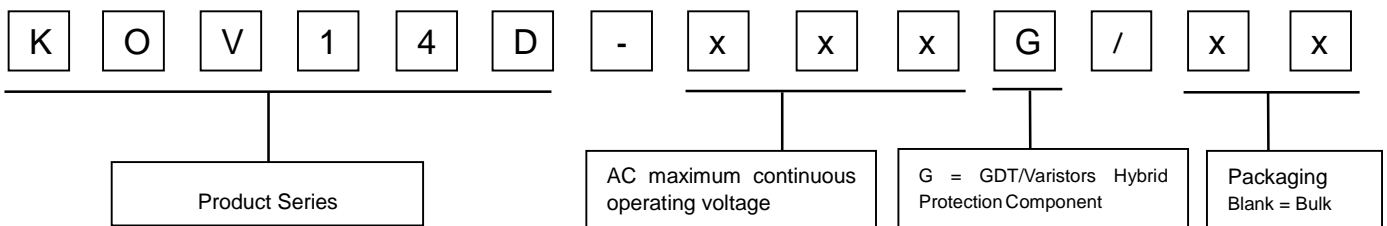

Absolute Maximum Ratings (@T_A=25°C unless otherwise noted)

Parameter	Symbol	Typ	Value	Unit
Operating Temperature	T _{OPR}	25	-40 to +85	°C
Storage Temperature	T _{STG}	25	-40 to +105	°C


Electrical Characteristics (@T_A=25°C unless otherwise noted)

Part No.	Operating				Protection						
	Max. Continuous Operating Voltage (MCOV)		Max. Leakage @ MCOV	Max Capacitance	Inom UL1449/4th.	Uoc IEC61000-4-5	Ring Wave Surge IEEE 62.41	Protection Level Current Class (1) IEC 61051-1		Clamp Transition Time	Energy
	Vrms	V _{DC}	Arms	1MHz	15 Ops.	40 Ops.	200 A	Max .	Typ.		8/20µs
	V	V	µA	pF	A	V	Ops.	V _{fp}	V _C	µs	J
KOV14D-050G	50	65	< 1	4	3,000	6,000	± 250	700	150	0.3	31
KOV14D-060G	60	85	< 1	4	3,000	6,000	± 250	700	185	0.3	38
KOV14D-130G	130	170	< 1	4	3,000	6,000	± 250	700	360	0.3	82
KOV14D-175G	175	225	< 1	4	3,000	6,000	± 250	1200	475	0.3	116
KOV14D-210G	210	275	< 1	4	3,000	6,000	± 250	1200	535	0.3	128
KOV14D-250G	250	320	< 1	4	3,000	6,000	± 250	1200	630	0.3	158
KOV14D-275G	275	350	< 1	4	3,000	6,000	± 250	1200	680	0.3	170
KOV14D-300G	300	385	< 1	4	3,000	6,000	± 250	1200	740	0.3	185
KOV14D-320G	320	415	< 1	4	3,000	6,000	± 250	1200	810	0.3	205
KOV14D-350G	350	460	< 1	4	3,000	6,000	± 250	1200	870	0.3	220
KOV14D-385G	385	505	< 1	4	3,000	6,000	± 250	1400	950	0.3	240
KOV14D-420G	420	560	< 1	4	3,000	6,000	± 250	1400	1050	0.3	250
KOV14D-460G	460	615	< 1	4	3,000	6,000	± 250	1600	1150	0.3	260
KOV14D-510G	510	670	< 1	4	3,000	6,000	± 250	1600	1330	0.3	270

1) Front Level Protection (V_{fp}) defined as measured with 10 % of peak current in accordance with IEC 61051-1.


Soldering Profile

Users should ensure that they do not exceed the scope of IPC/JEDEC J-STD-020 (Pb-Free) during solder assembly.

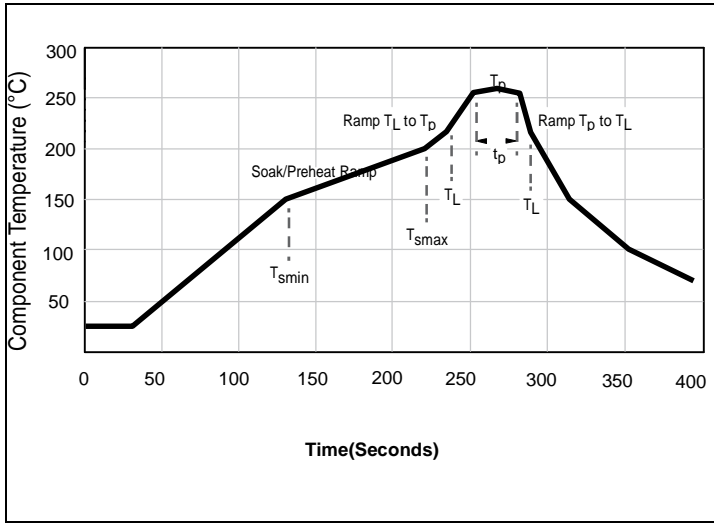

Profile Feature	Profile Limits
Preheat temperature min. (T_{smin})	150°C
Preheat temperature max. (T_{smax})	200°C
Ramp time ($T_{smax} - T_{smin}$)	60 – 120 seconds
Ramp-up rate (T_L to T_p)	3 °C / second max.
Liquidus temperature (T_L)	217°C
Time maintained above T_L	60 – 150 seconds
Peak package body temperature	260°C
Time within 5 °C of peak temperature (T_p)	30 seconds max.
Ramp-down rate (T_p to T_L)	6 °C / second max.
Time from 25 °C to peak temperature	8 minutes max.

Dimensions

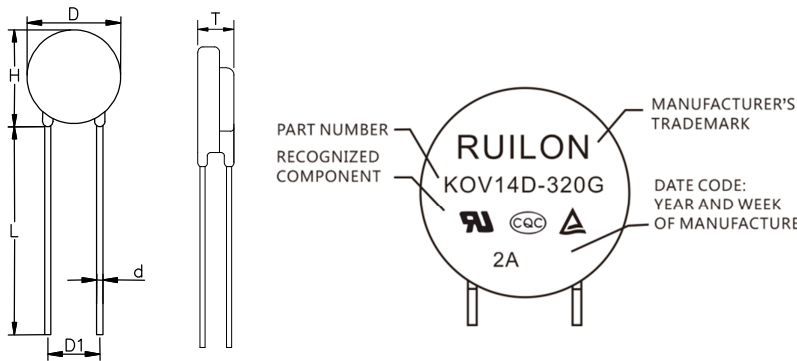


Symbol	Millimeters	Inches
H(max)	20.0	0.787
L(min)	15.0	0.591
D(max)	16.5	0.649
D1(±1.0)	7.5	0.295
T(max)	TABLE 2	
d(±0.1)	0.8	0.031

Packaging Quantity: 200pcs/bag

TABLE 2 - T(max.)


Model	Millimeters	Inches	Model	Millimeters	Inches
KOV14D-050G	6.5	0.256	KOV14D-300G	8.3	0.327
KOV14D-060G	6.6	0.260	KOV14D-320G	8.5	0.335
KOV14D-130G	7.1	0.280	KOV14D-350G	8.7	0.343
KOV14D-175G	7.5	0.295	KOV14D-385G	8.9	0.351
KOV14D-210G	7.6	0.299	KOV14D-420G	9.2	0.362
KOV14D-250G	7.9	0.311	KOV14D-460G	9.5	0.374
KOV14D-275G	8.1	0.319	KOV14D-510G	10	0.394

Construction

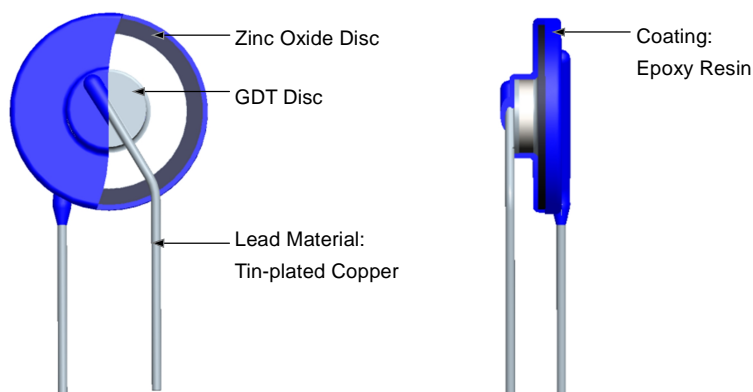

Packaging Information - 14 mm Disc

BULK

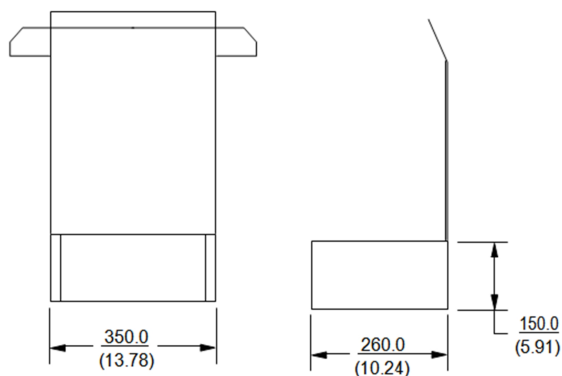

KOV14D-xxxG: 1600 pcs. per carton

- 200 pcs. per bag;
- 2 bags per inner box;
- 4 inner boxes per carton

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$