

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing



1424843

<https://www.phoenixcontact.com/us/products/1424843>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling housings B32, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x M40, height: 99.8 mm, cable gland: none, Standard

Your advantages

- Good shielding in the event of electromagnetic interference

Commercial data

Item number	1424843
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 644 (C-2-2019)
GTIN	4055626382487
Weight per piece (including packing)	471.6 g
Weight per piece (excluding packing)	429 g
Customs tariff number	85389099
Country of origin	CN

1424843


<https://www.phoenixcontact.com/us/products/1424843>

Technical data

Product properties

Product type	Housing with locking latch
Housing type	Coupling housings
Application	Standard
Type	B32
No. of cable outlets	1
Type of the screw connection	1x M40
Type	Tall design
Cable outlet	straight
Pg screw connection	none

Dimensions

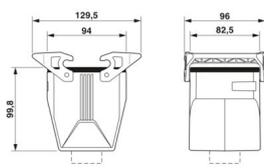Dimensional drawing	
Width	82.5 mm
Height	99.8 mm
Length	94 mm

Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	PA

Mechanical properties

Mechanical data

Type of the screw connection	1x M40
Locking type	Latch

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing




1424843

<https://www.phoenixcontact.com/us/products/1424843>

Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

Drawings

Dimensional drawing

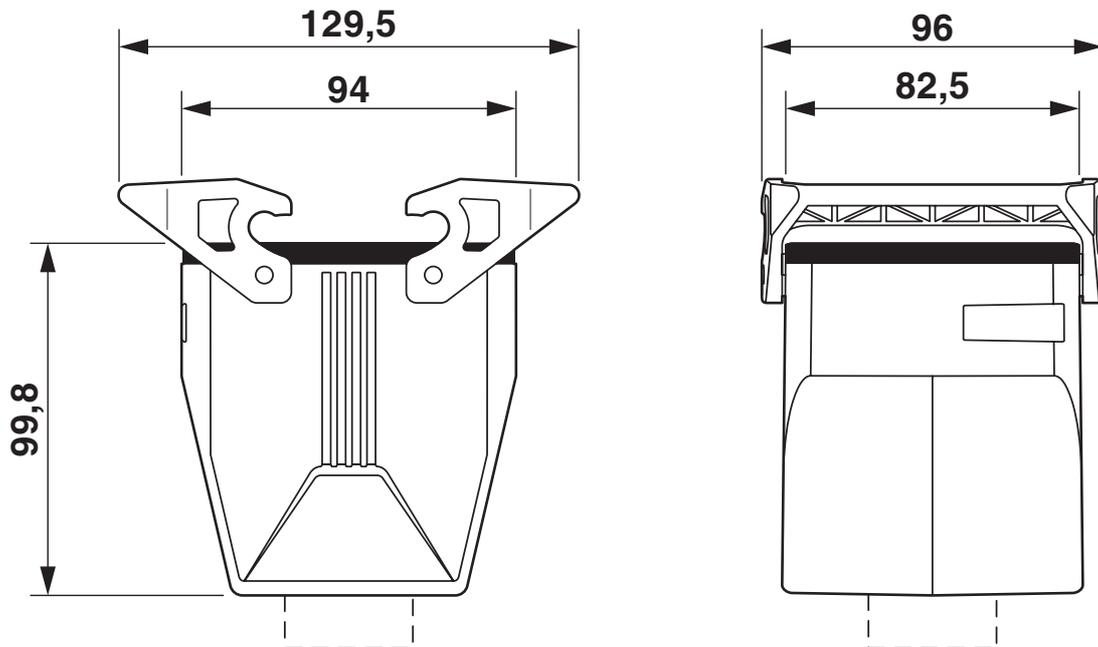

Dimensional drawing

1424843

<https://www.phoenixcontact.com/us/products/1424843>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424843>

DNV

Approval ID: TAE000037S



cUL Recognized

Approval ID: E255026



UL Recognized

Approval ID: E255026



EAC

Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

1424843

<https://www.phoenixcontact.com/us/products/1424843>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

1424843

<https://www.phoenixcontact.com/us/products/1424843>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing



1424843

<https://www.phoenixcontact.com/us/products/1424843>

Accessories

HC-STA-B32-BCSFD-PL-BK - Protective cover

1424850

<https://www.phoenixcontact.com/us/products/1424850>

Protective cover B32, for double locking latch, protective cover material: PA, height: 24.8 mm, seal: no, Standard, with lanyard



WP-G HF IP66 M40 BK - Screw connection

3240901

<https://www.phoenixcontact.com/us/products/3240901>

Cable gland, metric thread, IP66 protection, straight



HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing

1424843

<https://www.phoenixcontact.com/us/products/1424843>



WP-G HF IP69K M40 BK - Screw connection

3240887

<https://www.phoenixcontact.com/us/products/3240887>



Cable gland, metric thread, IP68/69k protection, straight

WP-GA HF IP66 M40 BK - Screw connection

3240929

<https://www.phoenixcontact.com/us/products/3240929>



Cable gland, metric thread, IP66 protection, angled

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing

1424843

<https://www.phoenixcontact.com/us/products/1424843>



WP-GA HF IP69K M40 BK - Screw connection

3240915

<https://www.phoenixcontact.com/us/products/3240915>

Cable gland, metric thread, IP68/69k protection, angled



WP-GR HF IP66 M40 BK - Screw connection

3240957

<https://www.phoenixcontact.com/us/products/3240957>

Cable gland, metric thread, IP66 protection, with strain relief



HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing

1424843

<https://www.phoenixcontact.com/us/products/1424843>

WP-GR HF IP69K M40 BK - Screw connection

3240943

<https://www.phoenixcontact.com/us/products/3240943>



Cable gland, metric thread, IP68/69k protection, with strain relief

WP-G PP HF M40 - Screw connection

3241001

<https://www.phoenixcontact.com/us/products/3241001>



Cable gland made from PP with metric thread, IP65 protection

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing



1424843

<https://www.phoenixcontact.com/us/products/1424843>

WP-GT PP HF M40 - Screw connection

3241015

<https://www.phoenixcontact.com/us/products/3241015>



Cable gland made from PP with metric thread, rotatable, IP54 protection

WP-G BRASS IP40 M40 - Screw connection

3241050

<https://www.phoenixcontact.com/us/products/3241050>



Cable gland made from brass with metric thread, IP40 protection

HC-STA-B32-CHWD-1TTM40-ELC-AL - Housing



1424843

<https://www.phoenixcontact.com/us/products/1424843>

WP-GT BRASS M40 - Screw connection

3241036

<https://www.phoenixcontact.com/us/products/3241036>

Cable gland made from brass with metric thread, rotatable, IP40 protection



WP-G BRASS IP65 M40 - Screw connection

3241064

<https://www.phoenixcontact.com/us/products/3241064>

Cable gland made from brass with metric thread, IP65 protection



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com