


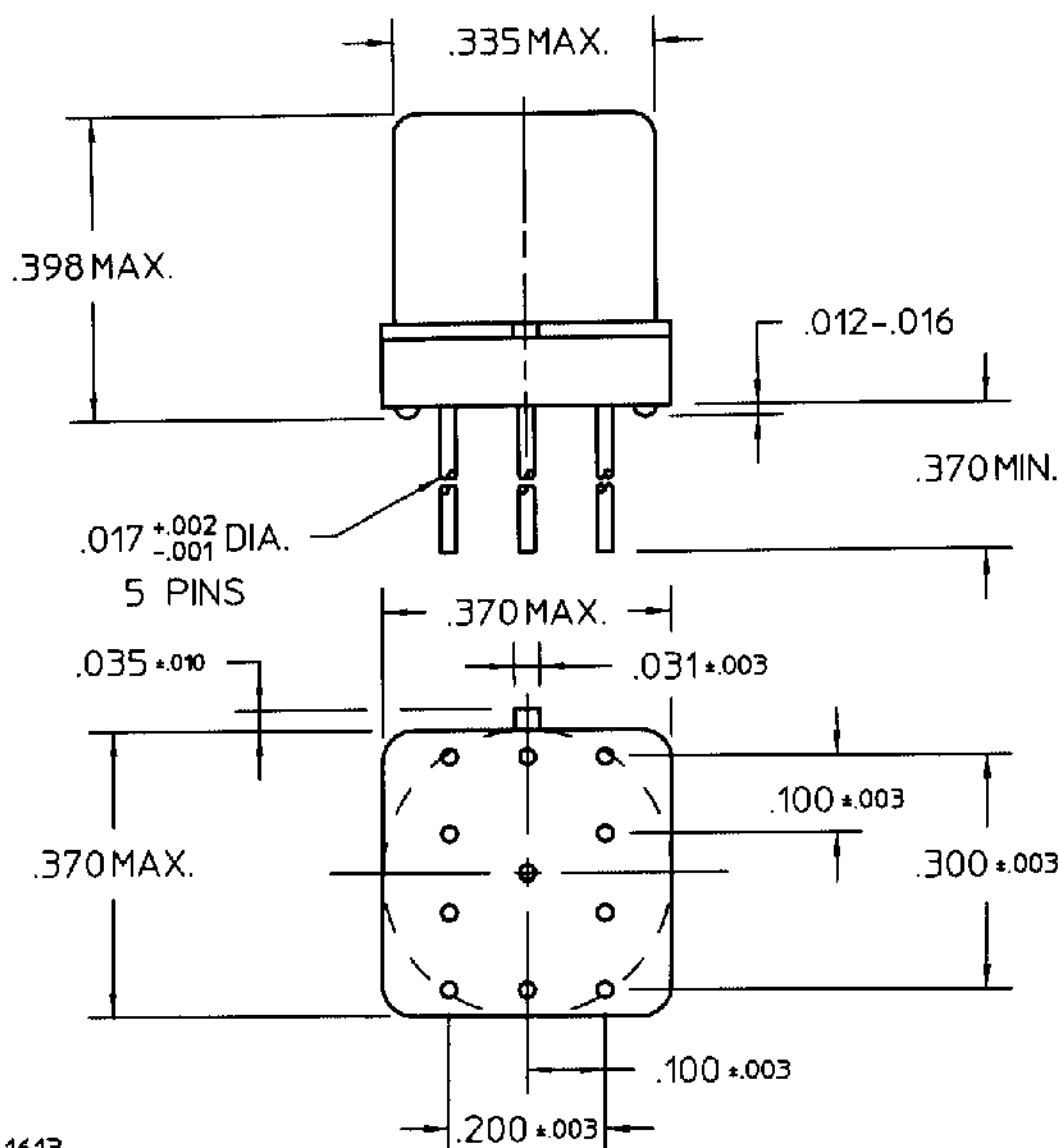

REV. 1

DCO 141613


COIL: @ 25°C
 RESISTANCE _____ 500 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 12.0 VDC
 MUST OPERATE _____ 8.0 VDC
 MUST RELEASE _____ 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 CPS TO _____ 3000 CPS @ _____ 30 g's
 SHOCK _____ 75 g's _____ 6 MS. DURATION
 TEMPERATURE _____ -65 °C TO _____ +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
 RELEASE TIME 4.0 MS MAX
 CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 12/8/99

12/13/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. _____ QPL
 CUST. NO. M39016/24-034L REV. _____

'J1MADD' RELAY

J1MACDD-12XLS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[J1MACDD-12XLS](#)