




Part Number : [5011903017](#)

Product Description : 1.00mm Pitch, Pico-Clasp PCB Header, Dual Row, Vertical, Surface Mount, 0.10µm Gold Plated, Inner Positive Lock, 30 Circuits, Natural

Series Number : 501190

Status : Active

Product Category : PCB Headers and Receptacles

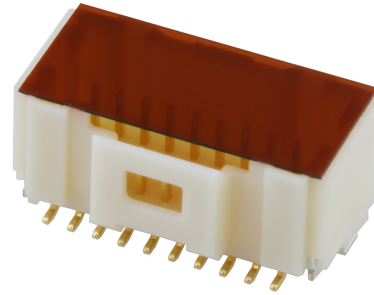

Documents & Resources

Drawings

[Drawing 5011903017_sd.pdf](#)

3D Models and Design Files

[2D Drawing DXF 5011903017.dxf](#)

[2D Drawing DXF \(PDF\) 5011903017.pdf](#)

[3D Model 5011903017_stp.zip](#)

Specifications

[Application Specification 5011890000-AS-000.pdf](#)

[Packaging Specification SPK-501190-001-001.pdf](#)

[Product Specification 5011890000-PS-001.pdf](#)


[Product Specification 5011891000-PS-001.pdf](#)

[Product Specification 5011891000-PS-CHI-001.pdf](#)

[Product Specification 5011891000-PS-JAP-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	501190
Description	1.00mm Pitch, Pico-Clasp PCB Header, Dual Row, Vertical, Surface Mount, 0.10µm Gold Plated, Inner Positive Lock, 30 Circuits, Natural
Application	Signal, Wire-to-Board
Comments	With Pick-and-Place Tape
Component Type	PCB Header
Product Family	Pico-Clasp Wire-to-Board Connectors
Product Name	Pico-Clasp
UPC	822348790197

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	100V AC (RMS)/DC

Physical

Breakaway	No
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Nylon
Net Weight	423.800/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	1.00mm
Plating min - Mating	0.102µm
Plating min - Termination	0.102µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Tape
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

Mates With / Use With

Mates with Part(s)

Description	Part Number
Pico-Clasp Low-Halogen Dual Row Receptacle Housings	<u>501189</u>

This document was generated on Sep 19, 2024