

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.27	阿树

- SPECIFICATIONS
- Voltage rating:30V AC/DC
 - Current rating:0.5A AC/DC
 - Withstanding Voltage:200V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environment testing: ≤40mΩ

PART NO.:
X0800 H-XX-46 HF
① ② ③ ④ ⑤

- 1.Series No
2.Category:H-HSG
3.Row No.Pin No:XX-02~20P
4.Material:46-PA46 UL94V-0
5.HF-Halogen Free

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.80	4.40	12	8.80	9.80	12.40
03	1.60	2.60	5.20	13	9.60	10.60	13.20
04	2.40	3.40	6.00	14	10.40	11.40	14.00
05	3.20	4.20	6.80	15	11.20	12.20	14.80
06	4.00	5.00	7.60	16	12.00	13.00	15.60
07	4.80	5.80	8.40	17	12.80	13.80	16.40
08	5.60	6.60	9.20	18	13.60	14.60	17.20
09	6.40	7.40	10.00	19	14.40	15.40	18.00
10	7.20	8.20	10.80	20	15.20	16.20	18.80
11	8.00	9.00	11.60				

X0800H-XX-46HF	PA46 UL 94V-0 Halogen Free	X0800T	X0800W
PART NO	Material(Wafer)	Suitable XKB Terminal	Suitable XKB Terminal


ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 0.80mm IDC Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X0800H-XX-46HF
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

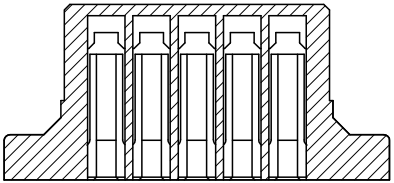

SEC:A-A

