



Push-Wire Connectors for Junction Boxes Series 273 and 773



<p>3 x 0.75 – 1.5 mm² "s" ① 3 x AWG 18 – 16 "sol." 5 x 0.75 – 1.5 mm² "s" ① 5 x AWG 18 – 16 "sol." 400 V / 4 kV / 2** 18 A</p> <p>10 – 13 mm / 0.45 in</p>	<p>8 x 0.75 – 1.5 mm² "s" ① 8 x AWG 18 – 16 "sol." 400 V / 4 kV / 2** 18 A</p> <p>10 – 13 mm / 0.45 in</p>	<p>2 x 1 – 2.5 mm² "s" ② 2 x AWG 18 – 12 "sol." 3 x 1 – 2.5 mm² "s" ② 3 x AWG 18 – 12 "sol." 400 V / 4 kV / 2** 24 A</p> <p>10 – 13 mm / 0.45 in</p>
<p>* VDE KEH CCA KEH N S D P CB GL BV NV</p>		



Color	Item No.	Item No.	Pack.-unit pcs	Color	Item No.	Pack.-unit pcs	Color	Item No.	Item No.	Pack.-unit pcs	
Push-wire connectors for junction boxes, 3-cond. con. 5-cond. con.				Push-wire connectors for junction boxes, 8-conductor connectors				Push-wire connectors for junction boxes, 2-cond. con. 3-cond. con.			
grey	273-100	273-101	1000 (10 x 100)	grey	273-108	500 (10 x 50)	dark grey	273-112	273-104	1000 (10 x 100)	
transparent	–	273-155	1000 (10 x 100)	transparent	273-158	500 (10 x 50)	transparent	273-252	273-253	1000 (10 x 100)	

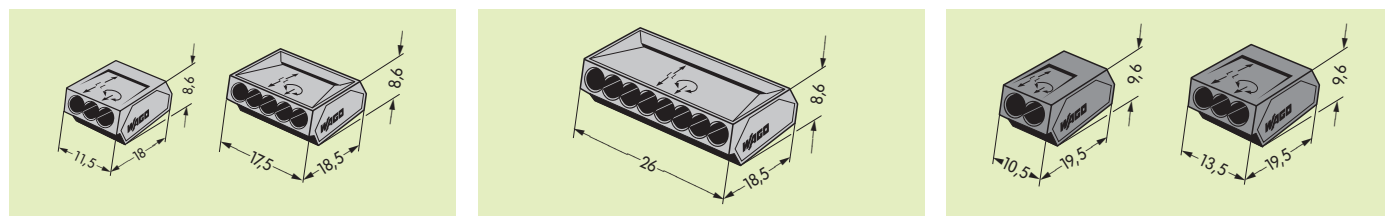


<p>4 x 1 – 2.5 mm² "s" ② 4 x AWG 18 – 12 "sol." 5 x 1 – 2.5 mm² "s" ② 5 x AWG 18 – 12 "sol." 400 V / 4 kV / 2** 24 A</p> <p>10 – 13 mm / 0.45 in</p>	<p>8 x 1 – 2.5 mm² "s" ② 8 x AWG 18 – 12 "sol." 400 V / 4 kV / 2** 24 A</p> <p>10 – 13 mm / 0.45 in</p>	<p>3 x 1.5 – 4 mm² "s" 3 x AWG 14 – 10 "sol." 400 V / 4 kV / 2** 32 A</p> <p>12 – 15 mm / 0.53 in</p>
<p>* VDE KEH CCA KEH N S D P CB GL BV NV</p>		



Color	Item No.	Item No.	Color	Item No.	Pack.-unit pcs	Color	Item No.	Pack.-unit pcs
Push-wire connectors for junction boxes, 4-cond. connectors 5-cond. connectors			Push-wire connectors for junction boxes, 8-conductor connectors			Push-wire connectors for junction boxes, 3-conductor connectors		
dark grey	273-102 ③	273-105 ③	dark grey	773-208	500 (10 x 50)	grey	273-403	500 (10 x 50)
transparent	273-254 ③	273-255 ④	transparent	773-108	500 (10 x 50)	transparent	273-453	500 (10 x 50)

Pack.-unit ③ 1000 (10 x 100) ④ 500 (10 x 50)

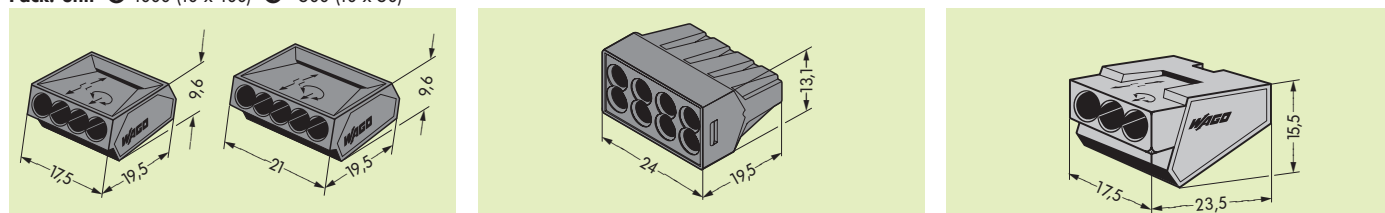

* For further approvals with corresponding ratings see section 15.
** in grounded (earthed) supply systems When using wires of the same diameter only, ① 0.5 mm²/AWG 20 or ② 0.75 mm²/AWG 18 are also possible.