
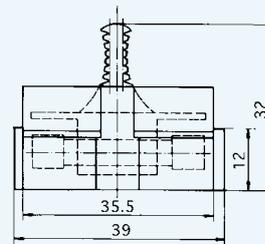
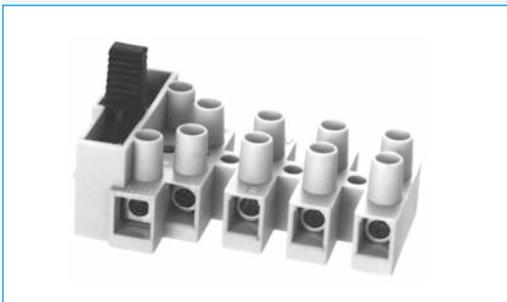


Number of poles x 10mm

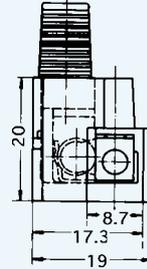

## TECHNICAL DATA

<b>Mouldings:</b>	Nylon 6.6, grey, UL94 V2, (fuseholder black)
<b>Inserts:</b>	Tinned brass
<b>Fuse contacts:</b>	Stainless steel
<b>Screws:</b>	M3.5 x 7, steel, zinc plated and yellow chromated
<b>Wire protectors:</b>	Stainless steel
<b>Maximum working temp:</b>	100°C continuous
<b>Current rating:</b>	16 amp to EN60335-1
<b>Voltage rating:</b>	Terminal block - 500V Fuseholder - 250V
<b>Conductor size:</b>	
Without wire protector:	Up to 10mm <sup>2</sup>
With wire protector :	Up to 4mm <sup>2</sup>
<b>Fuse size:</b>	1' x 1/4' or 1.1/4' x 1/4"
<b>Fixing centres:</b>	Peg to earth screw - 18mm Peg to fixing hole - 24mm

## OPTIONS

**Marking:** special printing available. Please provide sketch.

**Fuses:** see catalogue 2 section I for details

**High Temperature:** details upon request.

## FEATURES

**Series 1003SI** fused terminal blocks are available in unearthed versions from 1 to 5 pole and earthed versions from 3 to 5 pole. A common dovetail enables mixed assemblies to be constructed by clipping on additional 1 pole lengths to provide multiple versions of fused and unfused terminals. All variations can be supplied with or without wire protectors.


### Earth Screws & Washers (Optional)

Screws: 1003SIES - M3.5x12, Posi

Washers: 1003SITW - M3.5

## APPROVALS

Ⓢ ⚡ (Not "E" types)

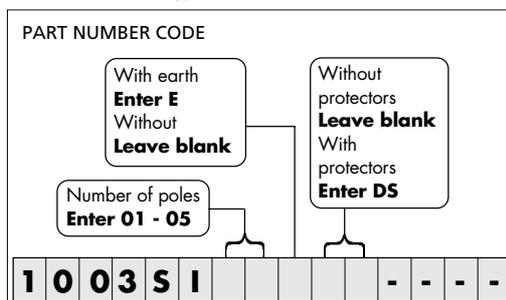

## SECTION 1D

FUSED TERMINAL BLOCKS



01273 431600



01273 439288



sales@metway.co.uk