




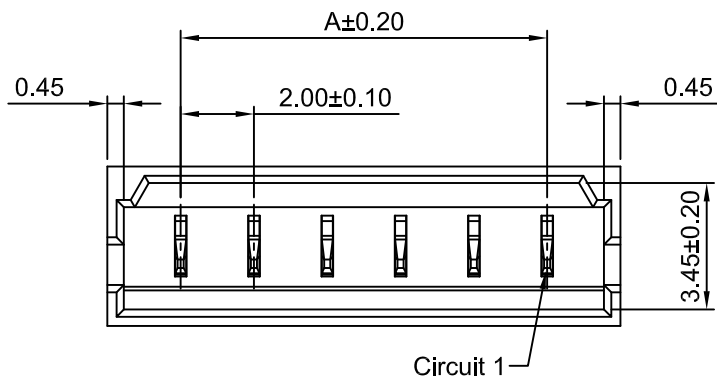

Even Numbers
4P~14P

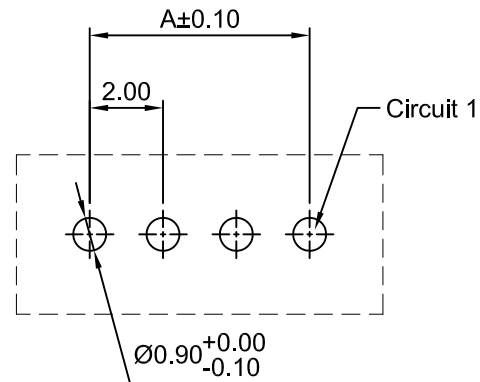

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

A2004WV-XP - ** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): Ivory

RD: Red

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.



Withstanding Voltage: 800V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel


Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
A2004WV-2P	2.00	6.00
A2004WV-3P	4.00	8.00
A2004WV-4P	6.00	10.00
A2004WV-5P	8.00	12.00
A2004WV-6P	10.00	14.00
A2004WV-7P	12.00	16.00
A2004WV-8P	14.00	18.00
A2004WV-9P	16.00	20.00
A2004WV-10P	18.00	22.00
A2004WV-11P	20.00	24.00
A2004WV-12P	22.00	26.00
A2004WV-13P	24.00	28.00
A2004WV-14P	26.00	30.00
A2004WV-15P	28.00	32.00

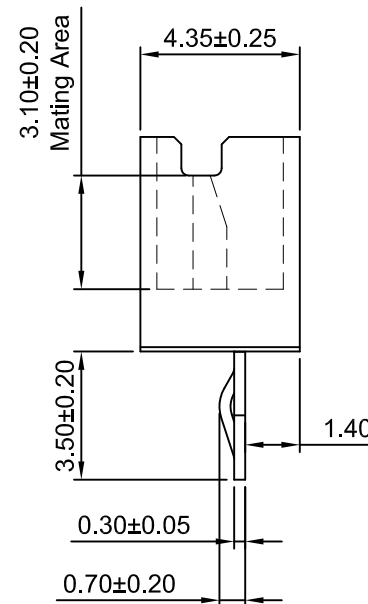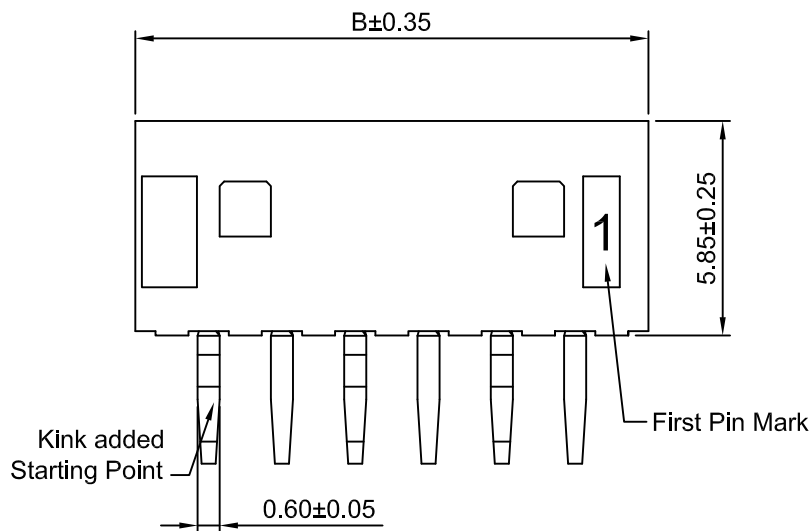

ODD Numbers
5P~15P



3P



2P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm Scale 5:1 Sheet 1 of 1

DRWN Wenmin Luo CHKD Diankui Wan APPR Jack Yin

General Tolerances
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°



TITLE

2.00mm PITCH
180° DIP WAFER

DRAWING NO. A2004WV-XP REV A3

A3	CHANGE THE DRAWING	2022.01.10
A2	ADD PACKING	2021.04.14
A1	CHANGE THE DRAWING	2020.07.06
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

Circuits	Packing
2P~4P	Bag
5P~15P	Tube