
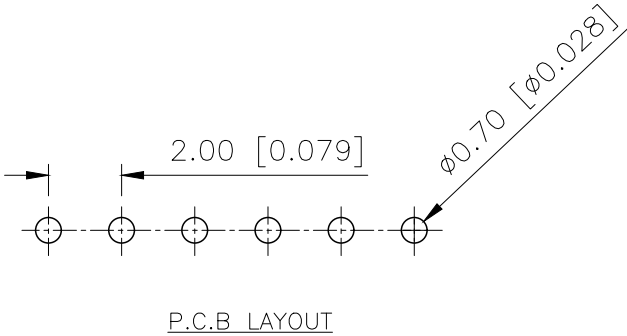


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树

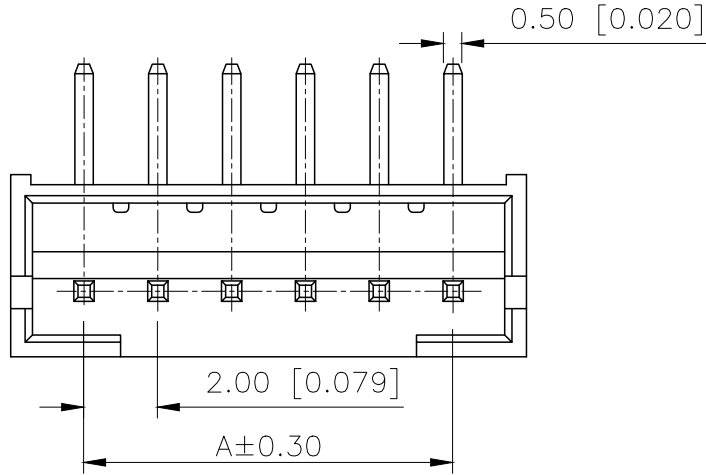

- SPECIFICATIONS
- Voltage rating:100V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ



PART NO.:

X2016 W R-XX-XX SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:XX-02~20Pin
⑤Material : N0-PA66;46-PA46 94V-0
⑥Planting:Sn-Bright Tin Plating;V01-Gold Flash

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	12	22.00	26.00
03	4.00	8.00	13	24.00	28.00
04	6.00	10.00	14	26.00	30.00
05	8.00	12.00	15	28.00	32.00
06	10.00	14.00	16	30.00	34.00
07	12.00	16.00	17	32.00	36.00
08	14.00	18.00	18	34.00	38.00
09	16.00	20.00	19	36.00	40.00
10	18.00	22.00	20	38.00	42.00
11	20.00	24.00			

X2016WR-XX-46SN	PA46 UL 94V-0	Brass	Tin-Plated	X2016H
X2016WR-XX-N0SN	Nylon 66 UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Housing

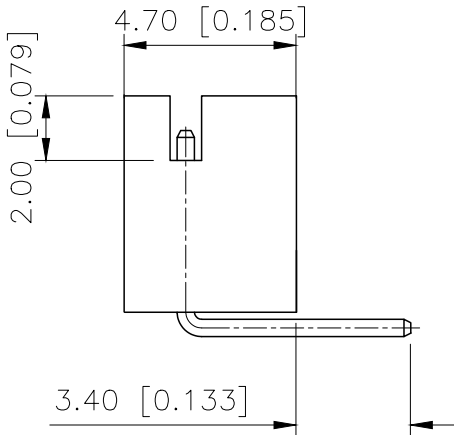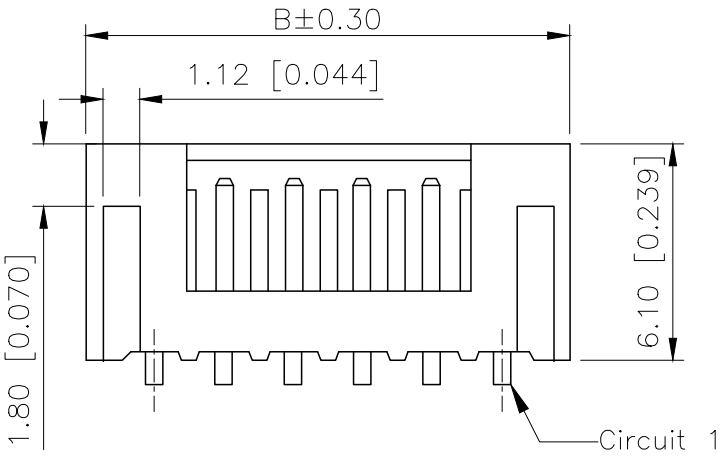

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2016WR-XX-46SN
APPROVED		SIZE: A4	DWG NO.: