

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.21	阿树






Specifications:  
 规格:  
 Voltage rating:250V AC/DC  
 额定电压: 250V AC/DC  
 Current rating:7A AC/DC  
 额定电流: 7A AC/DC  
 Withstanding voltage:1500V AC/minute  
 耐受电压: 1500V AC/分钟  
 Temperature range:-40°C~+125°C  
 温度范围: -40°C~+125°C  
 Insulation resistance:1000MΩ min  
 绝缘电阻: 1000MΩ Min  
 Contact resistance:10mΩ Max  
 接触电阻: 10mΩ Max

X9396 W R-XX A-46 V01  
 ① ② ③ ④ ⑤ ⑥ ⑦


- Series No
- Category:W-Wafer
- Welding Board Angle:R-Stright 90°
- Row No.Pin No:XX-02~15 Pin
- Special No:A-There are gaps
- Material:46-PA46 UL94V-0
- Plating:V01-Gold 1u"

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	3.96	7.92	09	31.68	35.64
03	7.92	11.88	10	35.64	39.60
04	11.88	15.84	11	39.60	43.56
05	15.84	19.80	12	43.56	47.52
06	19.80	23.76	13	47.52	51.48
07	23.76	27.72	14	51.48	55.44
08	27.72	31.68	15	55.44	59.40

X9396WR-XXA-46V01	PA46	Brass	Gold 1u"	X9396H
PART NO	Material	Material(Pin)	Finish	Suitable XKB Housing

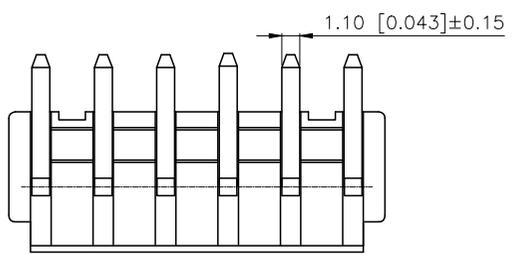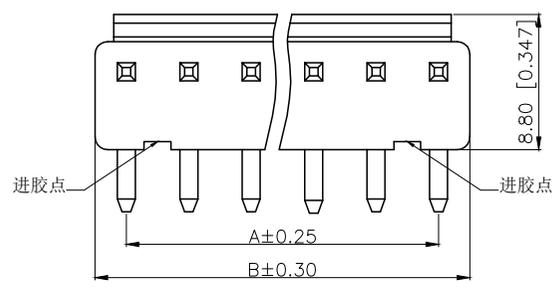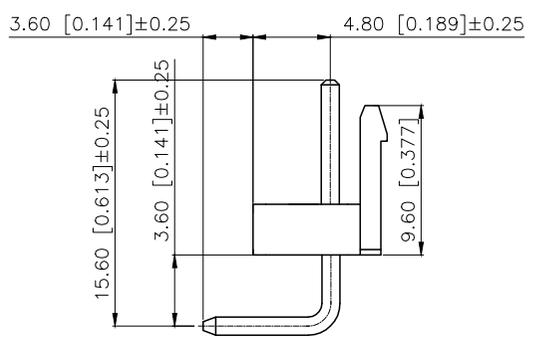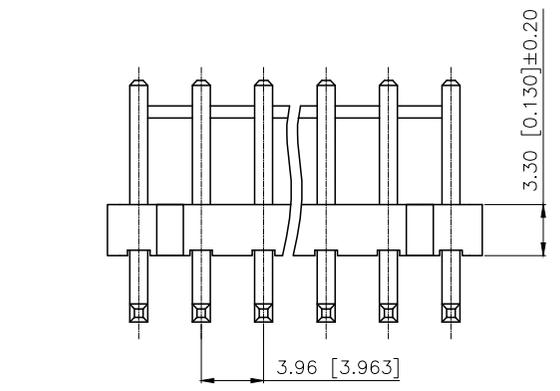

PCB LAYOUT

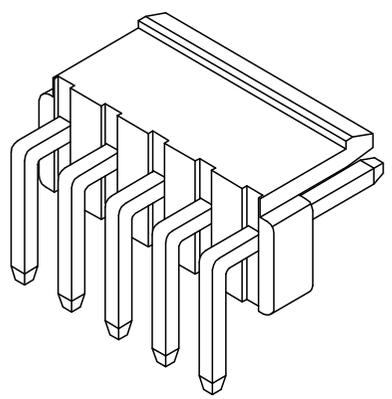

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.96mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9396WR-XXA-46V01
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1