
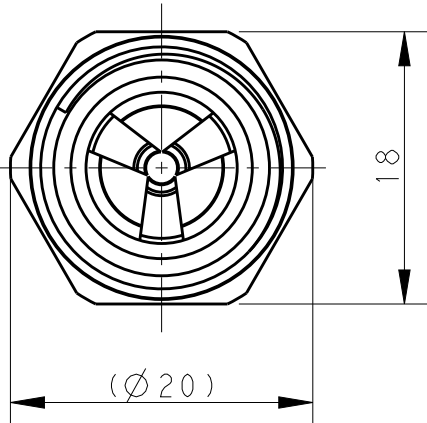
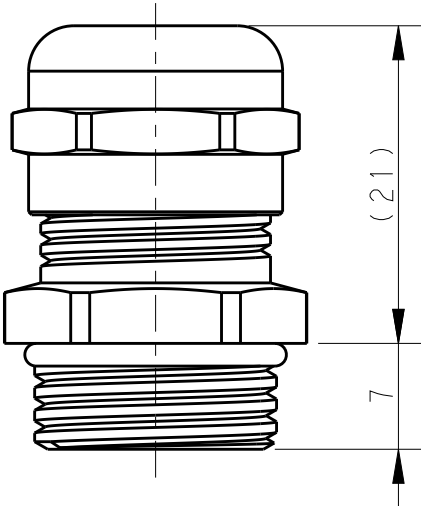
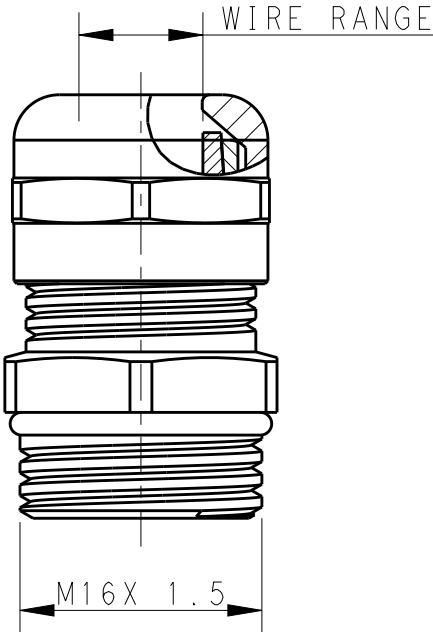
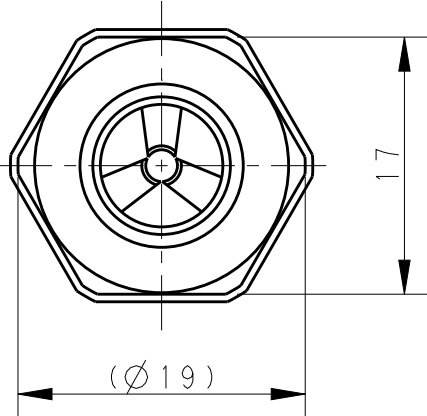


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	27APR2017	DW	CW

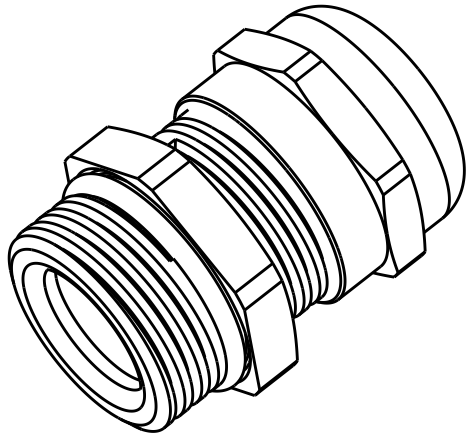

NOTES / 注解:

I. TECHNICAL CHARACTERISTICS / 技术参数:

SHELL MATERIAL / 主体材料 : NICKEL PLATED BRASS / 铜镀镍

SEAL MATERIAL / 密封材料: RUBBER, BLACK



PINCH RING MATERIAL / 夹紧件材料: NYLON, GREY

OPERATION TEMPERATURE / 工作温度: -40°C - +100°C

PROTECTION DEGREE / 防护等级: IP68

WIRE RANGE / 夹线范围: 4-8 mm

T3707160103-000	DLX-16-MC (4-8) 电磁屏蔽金属接头 M16 (4-8)
PART NUMBER 料 号	PART DESCRIPTION 描 述

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 07APR2017	 TE Connectivity			
DIMENSIONS: mm		CHK CHRIS WANG 07APR2017	NAME DLX-16-MC (4-8)			
		APVD XIANG XU 07APR2017				
		PRODUCT SPEC -	SIZE A3			
		APPLICATION SPEC -				
		WEIGHT -	DRAWING NO C-T3707160103000			
		MATERIAL -				
FINISH -		SCALE 2:1				
-						SHEET 1 OF 1
-		REV A				
CUSTOMER DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T3707160103-000](#)