M 1:1

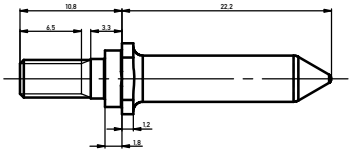

154918



174949

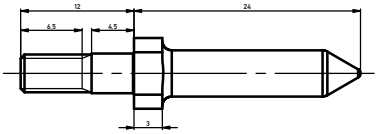

144078

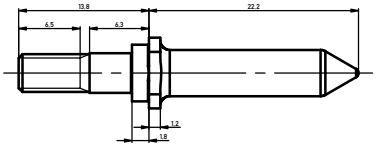

144077

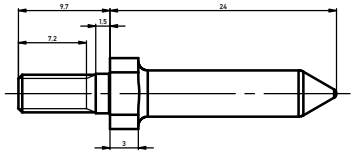

134733

Layout
134733
144078
174949
214897



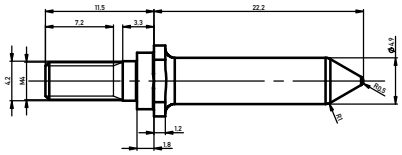



134732

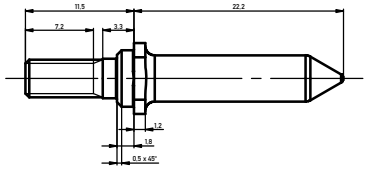

194016

Layout
134732
144077
154918
194016
214898





214897



214898

Montage immer mit Sicherungsscheibe z.B. von Schnarr.
Assembly always with circwasher, for example from Schnarr.
1) unter 3.2mm zusätzlich Unterlegscheibe verwenden.
up to 3.2mm use washer additional.
2) maximales Anzugsmoment: 200Ncm
max. torque: 200Ncm

Ident-Nr. *Part-no.*	Backplanestärke *thickness of backplane*	Bemerkungen *remarks*
214898	min. 3	Verwendung mit Grundkörper 134734 *use only with housing 134734*
214897	min. 3	Direktmontage auf Leiterplatte *to fit on backplane without housing 134734*
194016	2.5 - 6	Verwendung mit Grundkörper 134734 *use only with housing 134734*
174949	2.5 - 4.5 [1]	Direktmontage auf Leiterplatte *to fit on backplane without housing 134734*
154918	3.5 - 6	Verwendung mit Grundkörper 134734 [2] *use only with housing 134734*
144078	6 - 8	Direktmontage auf Leiterplatte *to fit on backplane without housing 134734*
144077	6 - 8	Verwendung mit Grundkörper 134734 [2] *use only with housing 134734*
134733	2.5 - 6 [1]	Direktmontage auf Leiterplatte *to fit on backplane without housing 134734*
134732	2.5 - 6 [1]	Verwendung mit Grundkörper 134734 [2] *use only with housing 134734*

All rights reserved.
Only for information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

www.ERNI.com

Information:

Tolerances: ISO 2768-mK, 0.5 x 0.5 DIN 7168 m x m datum

Scale: 5:1

Edelstahl / *stainless steel*

Designation:

Führungsstift
Guiding System ERmet

134731 A0

Date: 08.04.2015

Drawn: ERNI427