


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000 MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Nylon66, UL94V-0

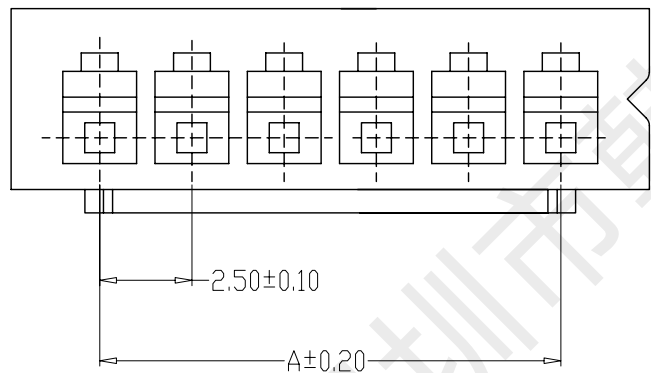

编 号	尺寸 (mm)	
	A	B
XH25401-02Y	2.50	7.50
XH25401-03Y	5.00	10.00
XH25401-04Y	7.50	12.50
XH25401-05Y	10.00	15.00
XH25401-06Y	12.50	17.50
XH25401-07Y	15.00	20.00
XH25401-08Y	17.50	22.50
XH25401-09Y	20.00	25.00
XH25401-10Y	22.50	27.50
XH25401-11Y	25.00	30.00
XH25401-12Y	27.50	32.50
XH25401-20Y	47.50	52.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	黄彬		料号 PART NO.	HX XH2.54-2Y	版本 REV.	A		
			X.±0.25	X.*±2'		审核 CHECK	张伟		品名 TITLE	压线端子胶壳	页次 SHEET	1/1	
			.XX±0.20	.X'±1'			核准 APPROVAL	罗小春		客户料号 CUTM. NO.			
			.XX±0.15	.XX'±0.5'				单位 UNITS	MM	比例 SCALE	1:1		
			.XXX±0.10	.XXX'±0.5'				深圳市韩下电子有限公司					