
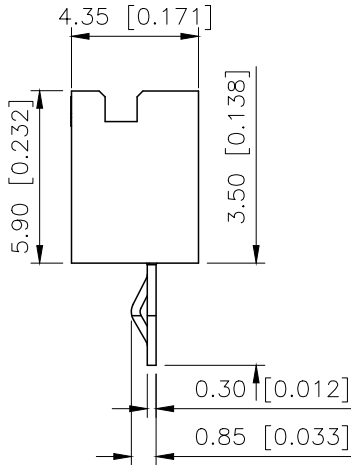
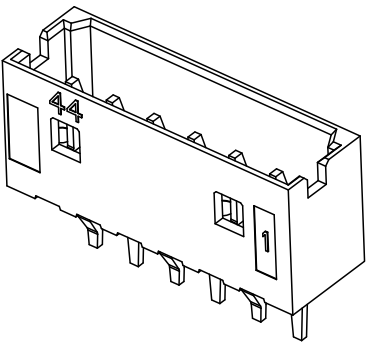


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.09	阿树

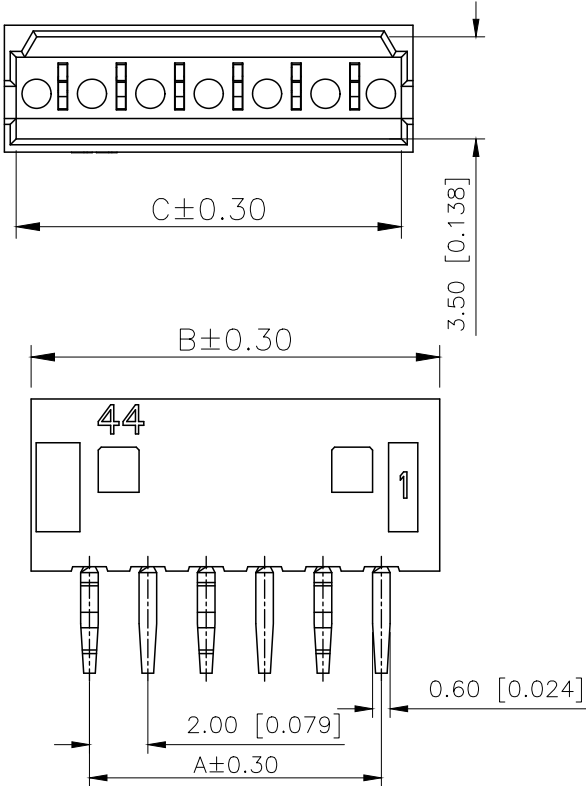


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤30mΩ

PART NO.:

X2012 W V-XX-N0 SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Straight 180°
④Row No.Pin No:XX-02~15Pin
⑤Material: N0-PA66 UL94V-0
⑥Planting:SN-Tin Plated

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	5.20	09	16.00	20.00	19.20
03	4.00	8.00	7.20	10	18.00	22.00	21.20
04	6.00	10.00	9.20	11	20.00	24.00	23.20
05	8.00	12.00	11.20	12	22.00	26.00	25.20
06	10.00	14.00	13.20	13	24.00	28.00	27.20
07	12.00	16.00	15.20	14	26.00	30.00	29.20
08	14.00	18.00	17.20	15	28.00	32.00	31.20

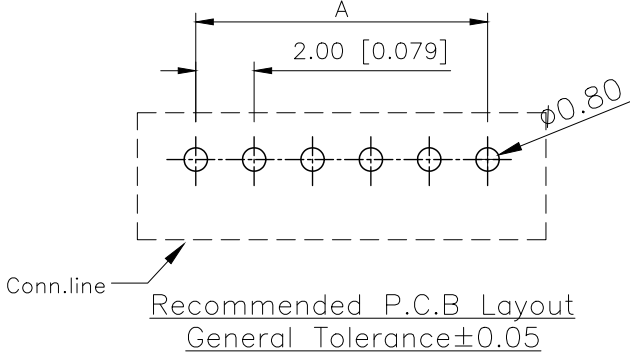

X2012WV-XX-N0SN	Nyoln 66 UL 94V-0	Brass	Tin-Plated	X2012H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2012WV-XX-N0SN
APPROVED		SIZE:	A4	DWG NO.:	