

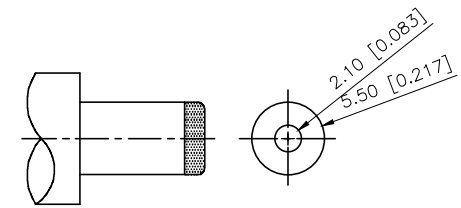
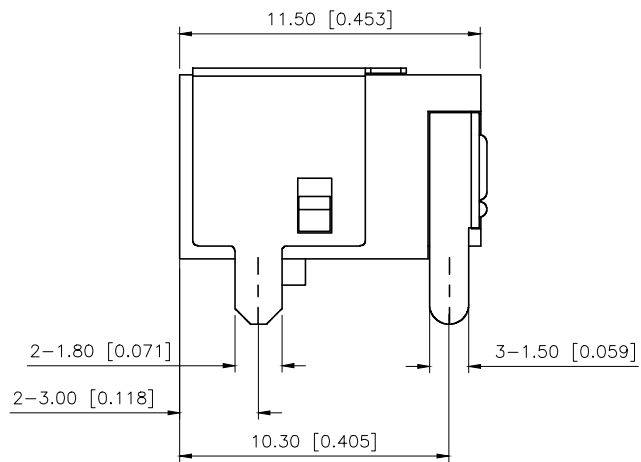



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

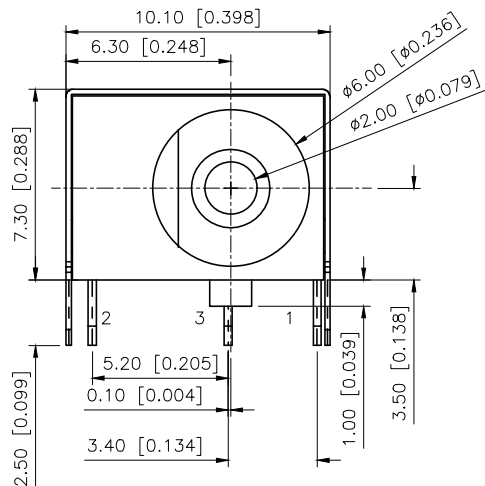

MATING PLUG
Jack Insertion Depth: 8.2 mm

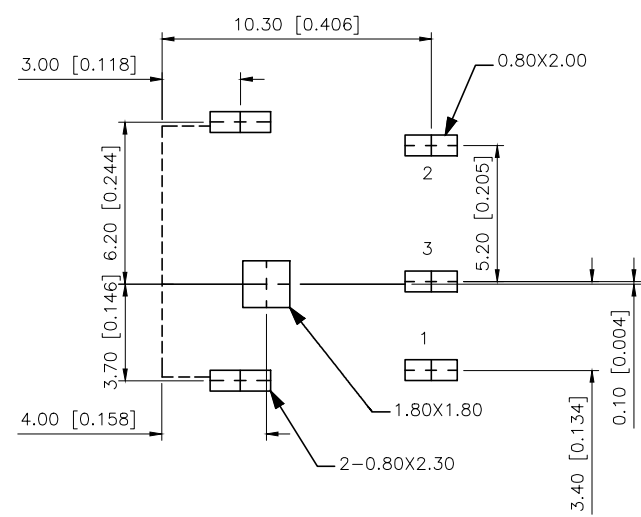

P.C.B. LAYOUT

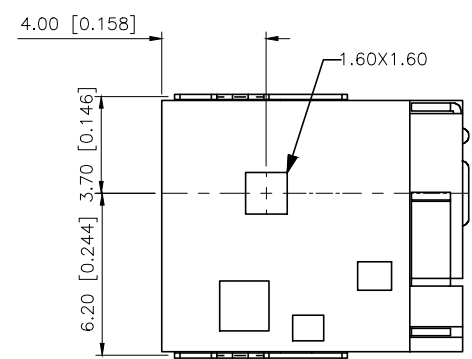

SCHEMATIC	
Model	DC-044A-2.5A
Center Pin	$\phi 2.0$ mm $\phi 2.5$ mm

Terminal 3	Brass	Silver
Terminal 2	Phosphor Bronze	Silver
Terminal 1	Brass	Silver
Center pin	Brass	Silver
Axis support	Brass	Silver
Plastic	PBT	
PAPT NAMF	MATERIAL	PLATING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DC POWER JACK
CHECKED		UNIT:	mm/in	PART NO.:	DC-044A-2.5A-2.0
APPROVED		SIZE:	A4	DWG NO.:	