




+ CONNECTORS

AUTOMOTIVE, TRUCK, BUS, & OFF-ROAD HOUSINGS

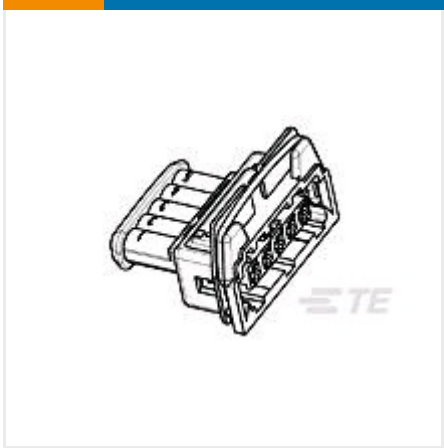

✓ Active

TE CONNECTIVITY (TE)
5W JPT/SWS CET CON
AMP | Junior Power Timer , Timer Connector System

953310-2
TE Internal Number: 953310-2

- EU RoHS Compliant
- EU ELV Compliant
- Connector Style** Housing for female terminals
- Mating Tab Width** 2.8 mm [.11 in]
- Connector System** Wire-to-Wire
- Number of Positions** 5
- Centerline (Pitch)** 5 mm [.197 in]

↓ **PRODUCT DRAWING**
English

↓ **3D PDF**

DOCUMENTATION

Product Drawings

5W JPT/SWS RECEPTACLE HOUSING ASS'Y PORTE-CLIPS 5V JPT/SWS
PDF (TIFF AVAILABLE)
English

CAD Files

Customer View Model
3D_STP.ZIP
English

Customer View Model
2D_DXF.ZIP
English

3D PDF

PDF

English

Customer View Model

3D_IGS.ZIP

English

Product Specifications

Product Specification

PORTE-CLIPS 5 VOIES POUR JPT A JOINT UNIFILAIRE

TIF

English

PORTE-CLIPS 5 VOIES POUR JPT A JOINT UNIFILAIRE

PDF

English

Instruction Sheets

Instruction Sheet (non U.S.)

PORTE-CLIP 5 VOIES POUR JPT A JOINT UNIFILAIRE

PDF

French

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Connector Style Housing for female terminals

Connector System Wire-to-Wire

Sealable Yes

Hybrid Connector No

Primary Locking Feature On the terminal

Strain Relief No

Configuration Features

Number of Positions 5

Number of Rows 1

Electrical Characteristics

Nominal Voltage Architecture (V) 12, 24, 42, 48

Operating Voltage (VDC) 48

Body Features

Color Brown

Cable Exit Angle 180°

Body Material PA GF

Contact Features

Mating Tab Width 2.8 mm [.11 in]

Mechanical Attachment

Mounting Feature No
Terminal Position Assurance Yes
Polarized Yes

Housing Features

Centerline (Pitch) 5 mm [.197 in]

Dimensions

Width 33.8 mm [1.331 in]
Height 26 mm [1.024 in]
Length 39.6 mm [1.559 in]

Usage Conditions

Operating Temperature Range -40 – 100 °C [-40 – 212 °F]

Operation/Application

Circuit Application Signal

Packaging Features

Packaging Method Box

Other

Connector Position Assurance Capable No
Serviceable No

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance
PDF