
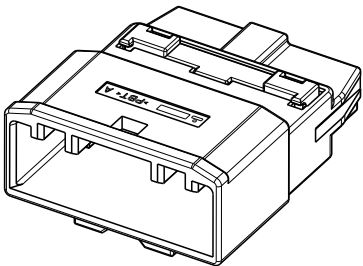


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
-	-		AI	REVISED (ECR-22-XXXX)		14.DEC.22	KT

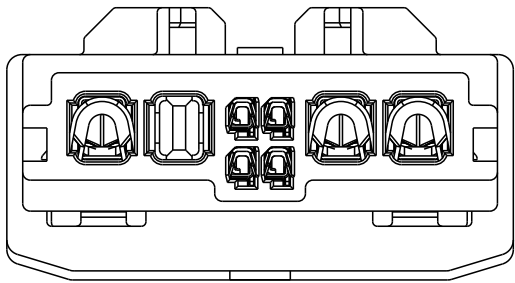

SCALE 1:1

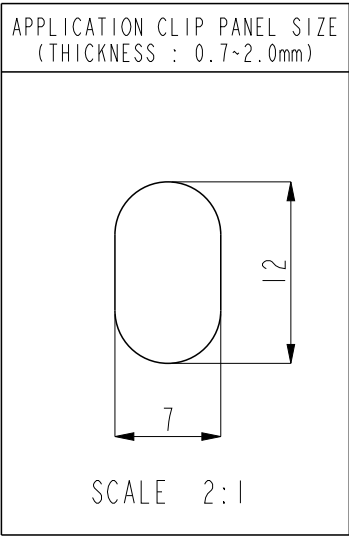
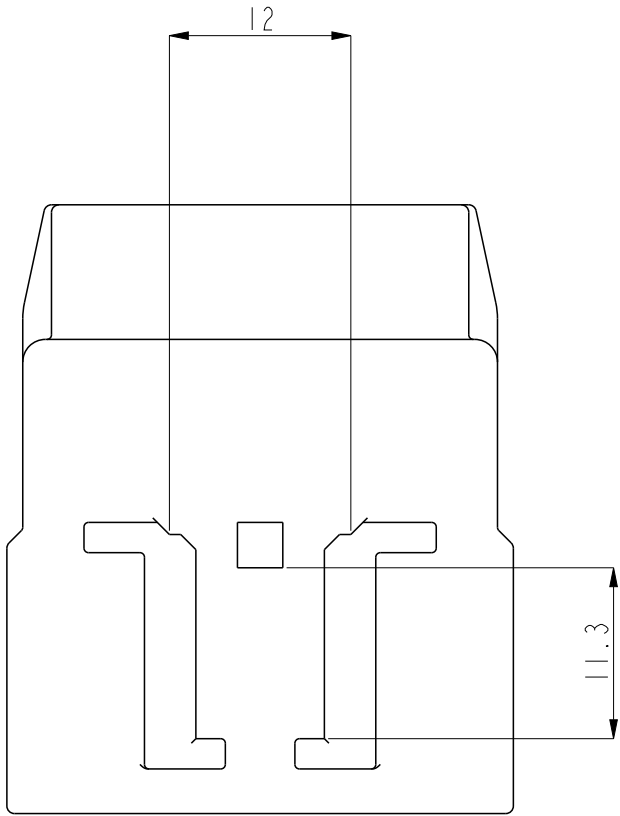
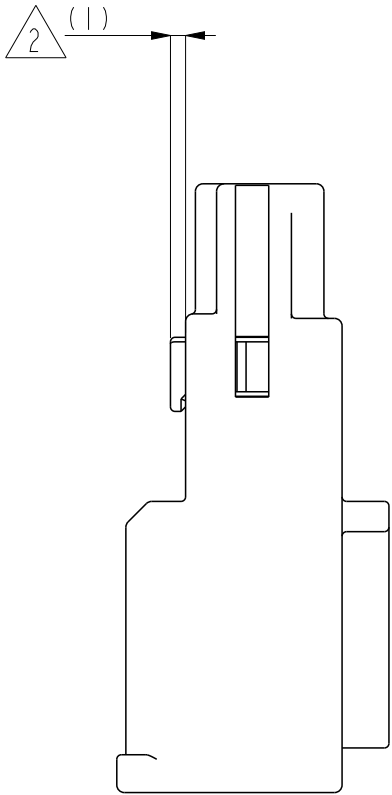
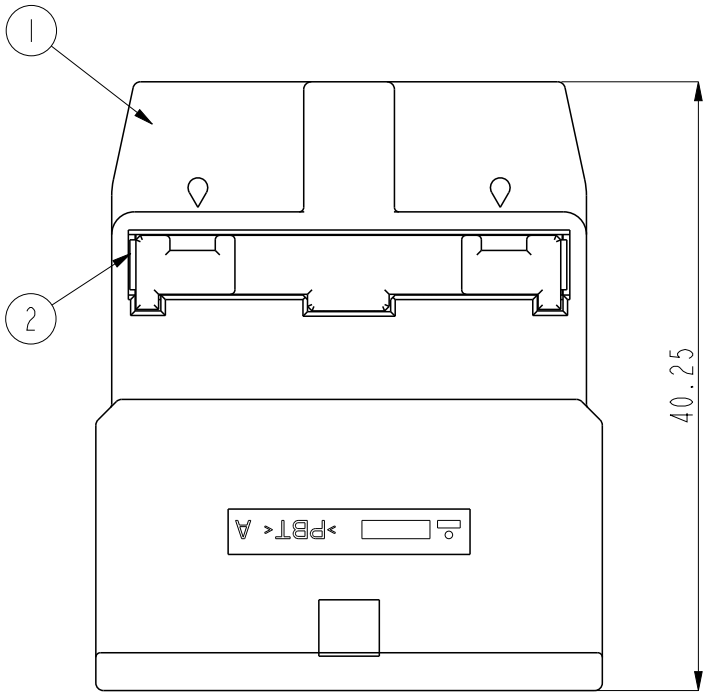



TABLE 1.

CONTACT	PART NO.	WIRE SIZE(SQ)	INSULATION DIAMETER(mm)
.025	2005098-1	0.13~0.22	0.9~1.05
	2005154-1	0.3~0.5	1.1~1.7
.110	2-964292-1	0.35~0.5	1.15~1.6
	2-964294-1	>0.5~1.0	1.4~2.1
	2-964296-1	1.25~2.5	2.2~3.0

- NOTE
1. GENERAL TOLERANCE: $\pm 0.3, \pm 3^\circ$
 2. DELEVERY CONDITION
 3. APPLICABLE RECEPTACLE CONTACT P/N: SEE TABLE 1
 4. APPLICABLE PLUG ASSY P/N: 2188504
 5. APPLICABLE CLIP P/N: 1-1897255-2

②	BLACK	PBT	8P CAP DBL	I	I
	ORANGE	PBT	8P CAP HSG	I	-
①	NATURAL			-	I
NO	COLOR	MATERIAL	DESCRIPTION	Q'TY	

8P CAP ASS'Y	8P CAP ASS'Y	DESCRIPTION
2188507-9	2188507-1	ASSY P/N

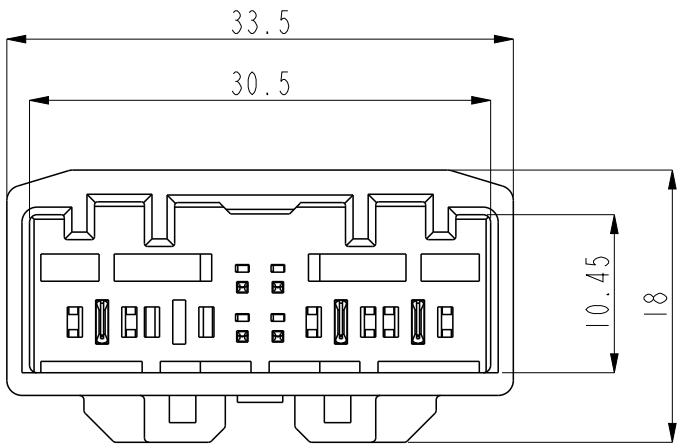

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.1

2 PLC ±0.01

3 PLC ±0.001

4 PLC ±0.0001

ANGLES ±

FINISH -

DWN CJ CHOI

CHK KT LIM

APVD HG CHO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

025/110 HYB 8P CAP ASS'Y

SIZE A3 CAGE CODE 00779 DRAWING NO C-2188507

RESTRICTED TO

SCALE 4:1 SHEET 1 OF 1 REV AI