

# KBP200 - KBP210

PRV : 50 - 1000 Volts

Io : 2.0 Amperes


## FEATURES :

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Rated isolation-voltage 2000 V<sub>AC</sub>
- \* Ideal for printed circuit board
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : Molded plastic
- \* Epoxy : UL94V-0 rate flame retardant
- \* Terminals : Plated lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 3.4 grams

# SILICON BRIDGE RECTIFIERS

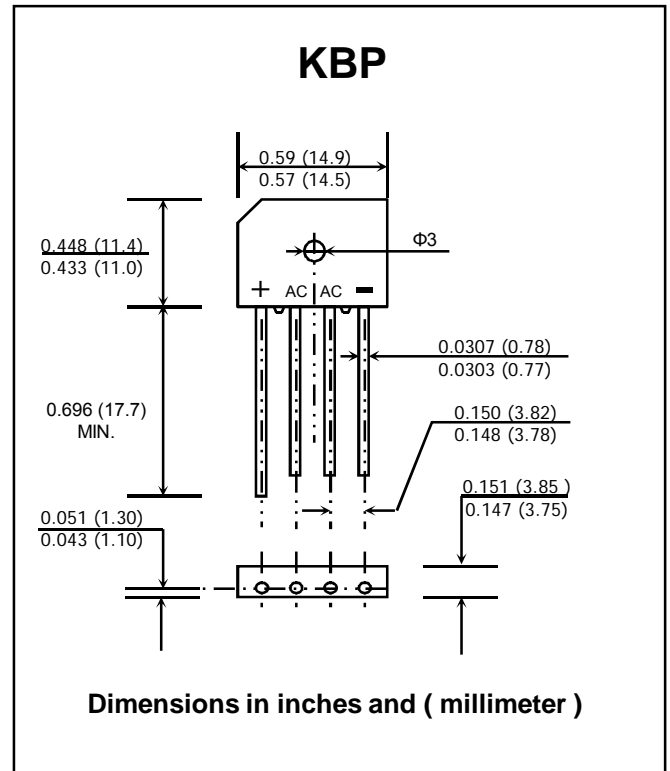

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.


RATING	SYMBOL	KBP 200	KBP 201	KBP 202	KBP 204	KBP 206	KBP 208	KBP 210	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Current T <sub>c</sub> = 50°C	I <sub>F(AV)</sub>	2.0							A
Peak Forward Surge Current, Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	60							A
Rating for fusing ( t < 8.3 ms. )	I <sup>2</sup> t	10							A <sup>2</sup> S
Maximum Forward Voltage per Diode at I <sub>F</sub> = 1.0 A	V <sub>F</sub>	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	10							μA
		1.0							mA
Typical Junction Capacitance per Diode (Note 1)	C <sub>J</sub>	24							pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	30							°C/W
Operating Junction Temperature Range	T <sub>J</sub>	- 50 to + 125							°C
Storage Temperature Range	T <sub>STG</sub>	- 50 to + 125							°C

### Notes :


- 1 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2 ) Thermal resistance from Junction to Ambient with units mounted on a 0.47" X 0.47" ( 12mm X 12mm ) Cu. Pads.

## RATING AND CHARACTERISTIC CURVES ( KBP200 - KBP210 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

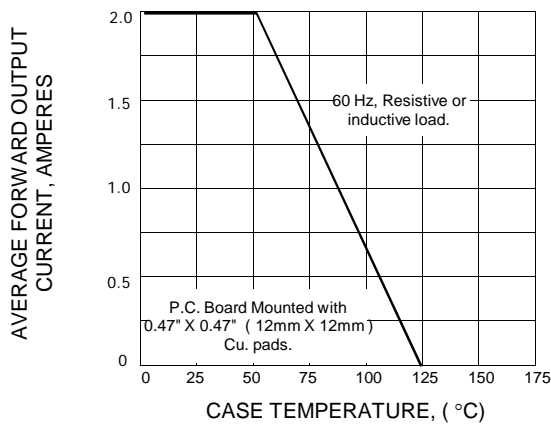

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

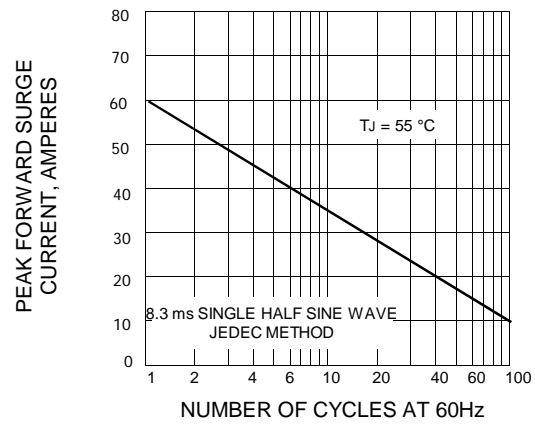

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

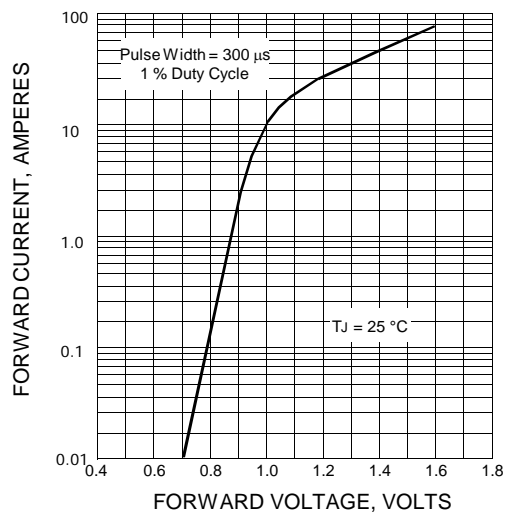

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

