

M12-Receptacle Connectors In Accordance With IEC 61076-2-101


RSHL | RKHL | 0986 EFC 152



Male, 4-, 5- and 8-Pole

Receptacle connector, M12 male connector for rear mounting, 4-, 5-, and 8-pole, print contacts, chassis side thread PG 9 (panel nut RSKF 9).

RSHL

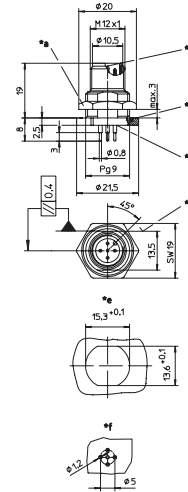


- *a nut
- *b O-Ring
- *c solder contacts potted with epoxy
- *d anti-rotation protection
- *e cut out for anti-rotation
- *f hole pattern in printed circuit board



Female, 4-, 5- and 8-Pole

Receptacle connector, M12 female connector for rear mounting, 4-, 5-, and 8-pole, printed contacts, chassis side thread PG 9 (panel nut RSKF 9) 0986 EFC 152: 4 poles, D coding.

RKHL

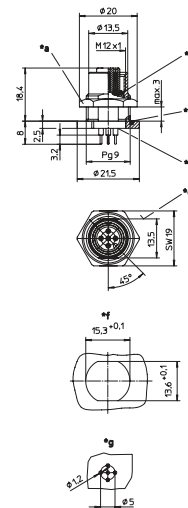


- *a nut
- *b O-Ring
- *c solder contacts potted with epoxy
- *d anti-rotation protection
- *e cut out for anti-rotation
- *f hole pattern in printed circuit board
- *v center contact leading

Pin Assignments

Face Views / M12


4 poles




4 poles D-Coding



5 poles



8 poles





Be Certain with Belden

M12-Receptacle Connectors In Accordance With IEC 61076-2-101
 RSHL | RKHL | 0986 EFC 152

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated
 Insert PA
 Contact CuZn, pre-nickeled and 0.8 microns gold-plated
 O-ring FKM2

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 4-5 poles 4 A
 8 poles 2 A
 Nominal voltage 4 poles 240 V;
 5-8 poles 60 V
 encapsulated
 Rated voltage 4 poles 250 V;
 5-8 poles 63 V
 Test voltage 4 poles 2.0 kV eff. / 60 s
 5-8 poles 1.5 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

| Part Number | Pins | Characteristics |
|--------------------------------|-----------|---|
| RSHL 4/S 5.5 RKHL 4/S 5.5 | 4 |   |
| 0976 EFC 152 | 4D | |
| RSHL 5/S 5.5 RKHL 5/S 5.5 | 5 |   |
| RSHL 8/S 5,5 RKHL 8/S 5,5 | 8 |   |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumberg Automation:](#)

[RKHL 5/S 5,5 PBelden](#) [RKHL 4/S 5,5](#) [RKHL 5/S 5,5](#) [RKHL 8/S 5,5](#)