



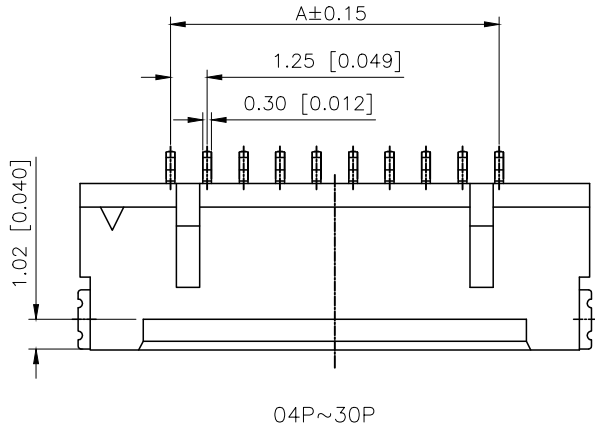
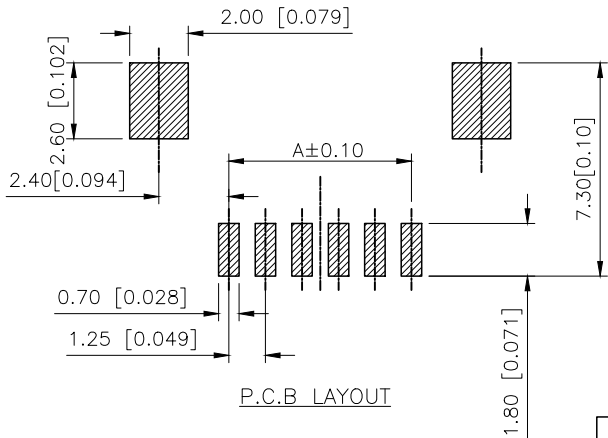


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

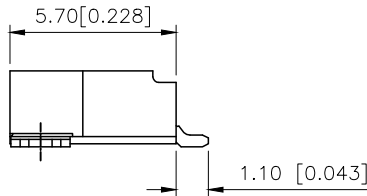

- SPECIFICATIONS
- Voltage rating:150V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥500MΩ
 - Contact resistance:≤30mΩ

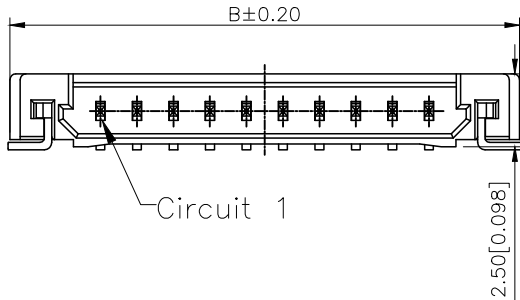

- PART NO.:
- X9862 W R S-XX-6T SN
- ① ② ③ ④ ⑤ ⑥ ⑦
- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:R-Stright 90°
- ④Welding Way:S-SMT
- ⑤Row No.Pin No:XX-02~30Pin
- ⑥Material : 6T-PA6T 94V-0 Beige
- ⑦Planting Categotry:SN-Bright tin plating

Poles	DIM.(mm)	
	A	B
02	1.25	7.45
03	2.50	8.70
04	3.75	9.95
05	5.00	11.20
06	6.25	12.45
07	7.50	13.70
08	8.75	14.95
09	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.74	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

X9862WRS-XX-6TSN	PA6T	Brass	X9862H
PART NO	Material	Material(Pin)	SUITable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9862WRS-XX-6TSN
APPROVED		SIZE:	A4	DWG NO.: