

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.7	阿树

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-25℃-+85℃

温度范围: -25℃-+85℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:10mΩ Max

接触电阻: 10mΩ Max

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

PART NO.:

X2015 I-P SN




① ② ③ ④

①Series Number.


②Category: T-terminal

③Material:P-Phosphor Bronze


④Plating:SN-Bright tin plating

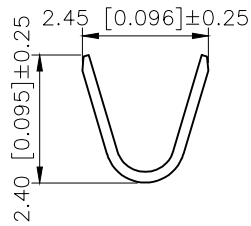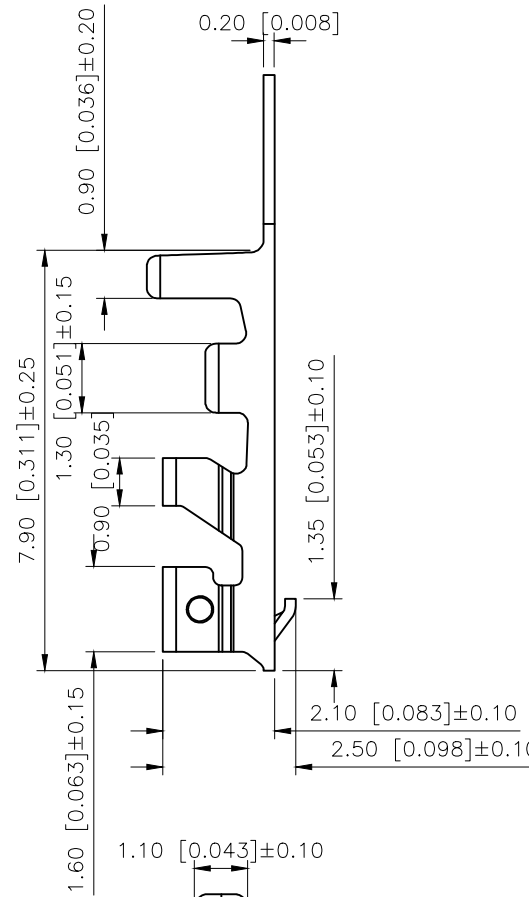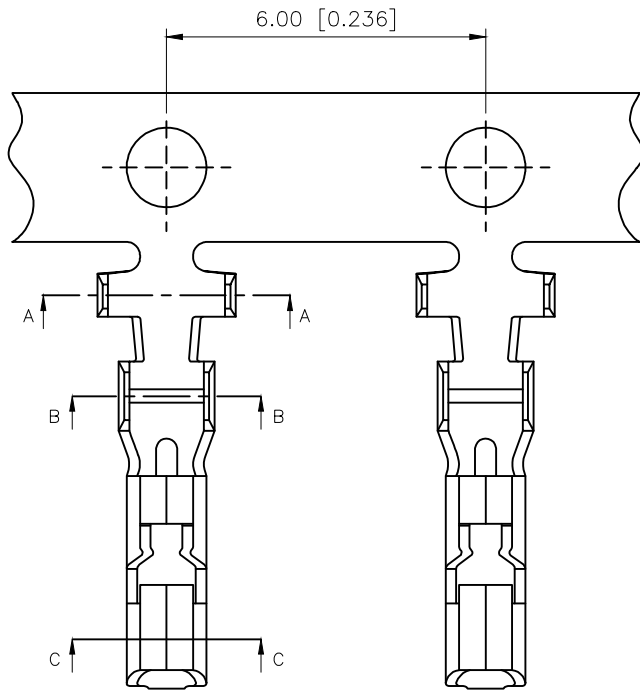

SECTION:A-A
SCALE:1:1

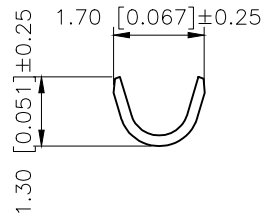

SECTION:B-B
SCALE:1:1

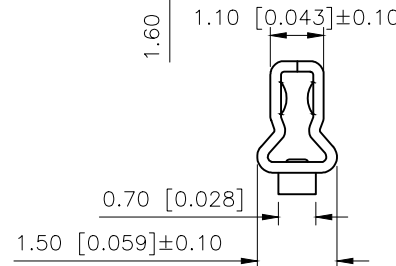

SECTION:C-C
SCALE:1:1

X2015T-PSN	Phosphor Bronze	AWG#22-28	1.5mm(MAX)	Stamping Before Plating:30u MIN Ni ;70u MIN Sn	X2015H
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X2015T-PSN
APPROVED		SIZE:	A4	DWG NO.: