
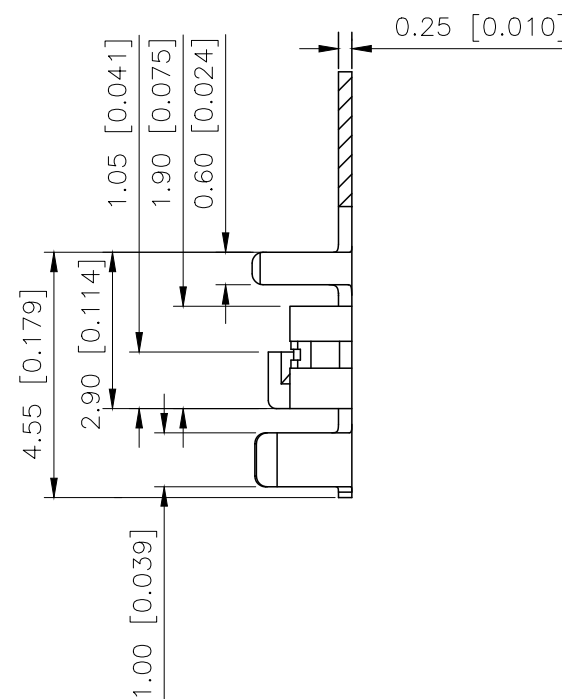


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.09	阿树

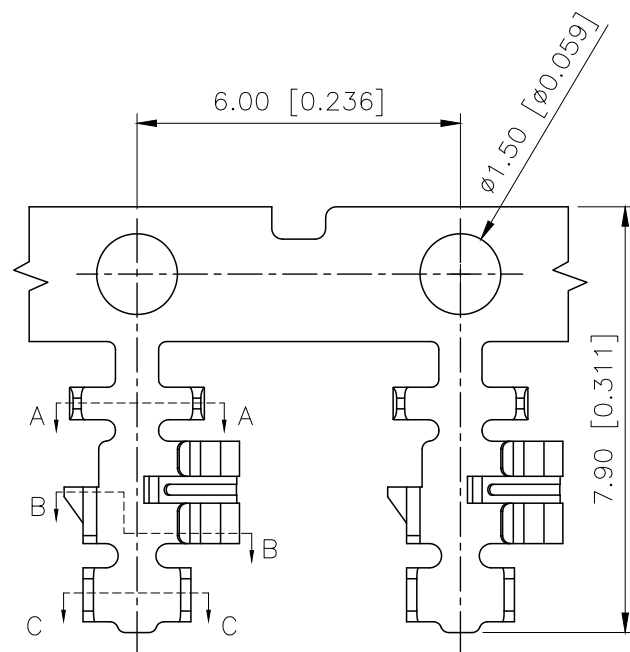


- SPECIFICATIONS
- Voltage rating:125V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ


PART NO.:

X2004 I-P SN
① ② ③ ④


- ①Series No
②Category:T-terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating




SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



SECTION:C-C
SCALE:1:1



X2004T-PSN	Phosphor Bronze	AWG#24-28	1.05mm(Max)	Stamping Before Plating :30u'' Ni;70u'' Sn	X2004H
PARY NO	Matrial	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2004T-PSN
APPROVED		SIZE:	A4	DWG NO.:	