
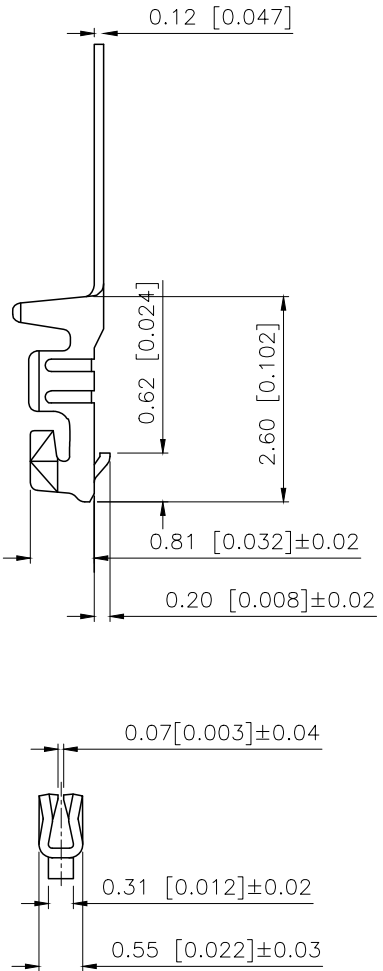


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.27	阿树

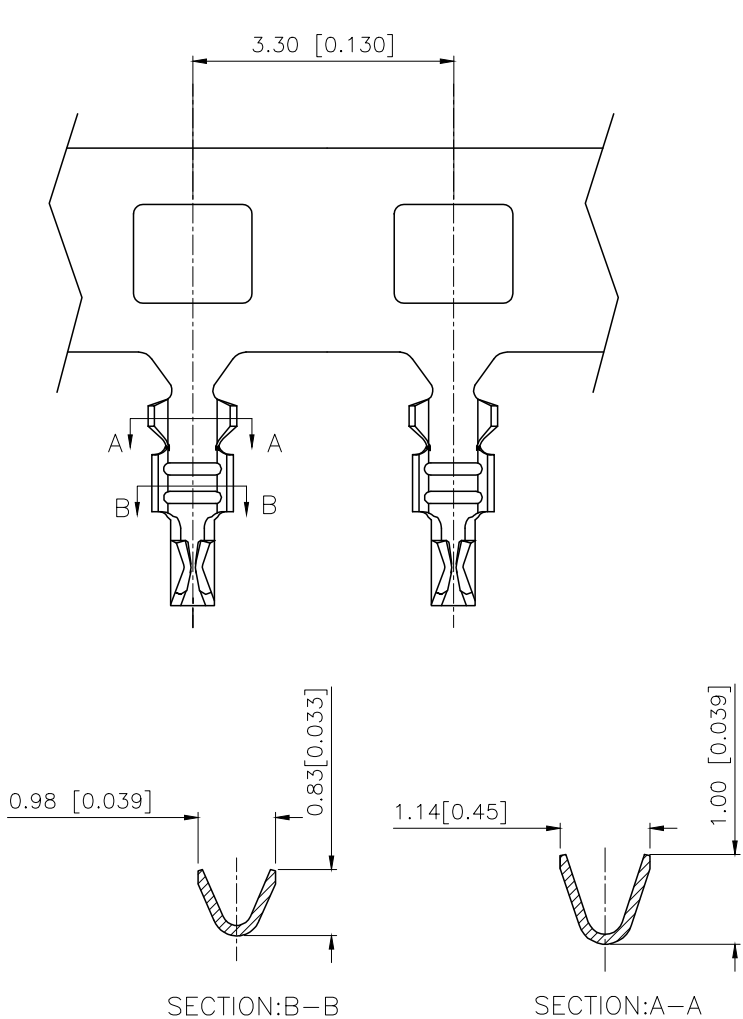

Specifications:
规格:
Voltage rating:30V AC/DC
额定电压: 30V AC/DC
Current rating: 0.5A AC/DC
额定电流: 0.5A AC/DC
Withstanding voltage:200V AC/minute
耐压电压: 200V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:≥100MΩ
绝缘电阻: ≥100MΩ
Contact resistance: ≤20mΩ
接触电阻: ≤20mΩ
After environment testing: ≤40mΩ
环境试验后: ≤40mΩ

PART NO.:
X0800 I-P V01
① ② ③ ④
①Series Number
②Category: T-terminal
③Material: P-Phosper bronze
④SN:70-120U" V01 -All Gold Flash

X0800T-PV01	High conductive Brass	AWG#32~36	0.39mm(Max)	Phosphor Bronze	Tin-Plated	X0800W
PART NO	Material	Wire Range	Insulation O.D.	Material (Terminal)	Finish (Terminal)	Suitable XKB Terminal
DESIGN			阿树	VIEW:	MODEL TYPE: 0.80mm IDC Style Connectors	
CHECKED				UNIT: mm/in	PART NO.: X0800T-PV01	
APPROVED				SIZE: A4	DWG NO.:	
SCALE				PAGE	REVISION	
N/A				1/1	A1	

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED