

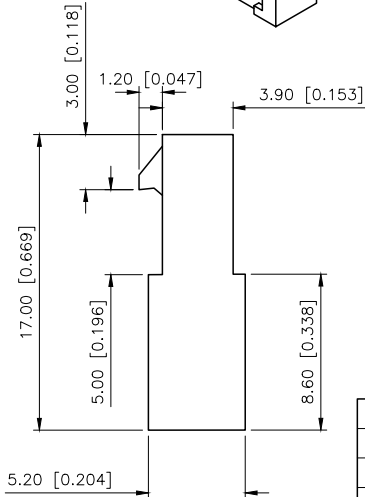

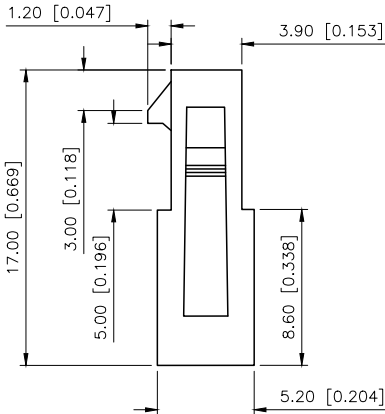





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.17	阿树



- Specifications
- Voltage rating:250V AC/DC
 - Current rating:5A AC/DC
 - Withstanding voltage:1000V AC/minute
 - Temperature range:-45° to+125°
 - Insulation resistance:≥1000MΩ Min
 - Contact resistance:≤10mΩ Max
 - After environmental testing: ≤20mΩ




PART NO.:


X3025 H F-XX G-N2 XX
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:H-HSG
③Category:F-Female Housing
④Row No.Pin No:XX-02~12Pin
⑤Plug the Pin &Special No.:I-Without Ears
G-With Ears
⑥Material: N2-PA66 94V-2;
⑦Color: Blank-Natural Color; WH-White

1X7PIN



1X8PIN




1X6PIN

1X9PIN




1X5PIN

1X10PIN



1X4PIN

1X11PIN



1X3PIN

1X12PIN



1X2PIN

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	3.00	6.90	08	21.00	24.90
03	6.00	9.90	09	24.00	27.90
04	9.00	12.90	10	27.00	30.90
05	12.00	15.90	11	30.00	33.90
06	15.00	18.90	12	33.00	36.90
07	18.00	21.90			

X3025HF-XXG-N2	Nylon 66 94V-2	Natural Color	X3025TM	X3025HM	With Ears
X3025HF-XXG-N2WH		White			Without Ears
X3025HF-XXI-N2		Natural Color			
X3025HF-XXI-N2WH		White			
PART NO	Material	Color	Suitable XKB Terminal	Mates With XKB Wafer	Note

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW: 
UNIT: mm/in
SIZE: A4

MODEL TYPE:
3.00mm Crimp Style Connectors
PART NO.:
X3025HF-XXG-N2
DWG NO.: