

EUROCARD | Eurocard Type L

TE Internal #: 5536153-5

Receptacle, Board-to-Board, 128 Position, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard

Type L, Eurocard Connectors

View on TE.com >




Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors











Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Termination Post & Tail Length: 4.57 mm [.18 in]

Number of Positions: 128

Centerline (Pitch): 2.54 mm [.1 in]

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Standard
DIN Level	II

Configuration Features

Number of Positions	128
Number of Rows	3
PCB Mount Orientation	Right Angle
Number of Columns	32
Number of Signal Positions	128
Rows Loaded	A, B, C, X, Y

Contact Features

Contact Type Socket	
---------------------	--



PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Copper Alloy	
Contact Current Rating (Max)	1.5 A	
Termination Features		
Termination Method to PCB	Through Hole - Solder	
Termination Post & Tail Length	4.57 mm[.18 in]	
Mechanical Attachment		
Mating Alignment Type	Polarization	
Mating Alignment	With	
PCB Mount Retention	Without	
Connector Mounting Type	Board Mount	
Housing Features		
Housing Material	Polymer - GF	
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
Row-to-Row Spacing	2.54 mm[.1 in]	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Method	Package	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)



Candidate List Declared Against: JUNE
2024 (241)

Does not contain REACH SVHC

Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

Solder Process Capability Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts







Also in the Series | Eurocard Type L

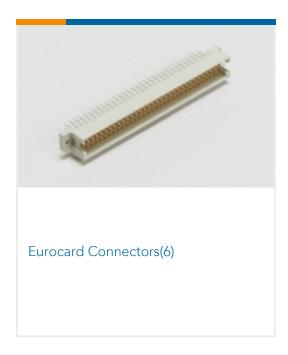


Customers Also Bought



















Documents

Product Drawings

ASSY, RECPT, ENH. TYPE C, EUROCARD, L-FREE, 5

English

CAD Files

Customer View Model

ENG_CVM_CVM_5536153-5_O.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5536153-5_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5536153-5_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English