
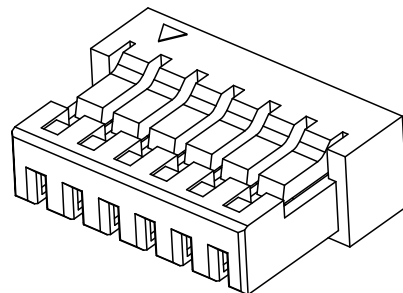


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.30	阿树


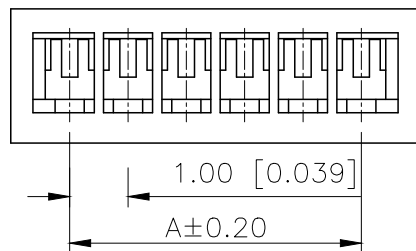


- SPECIFICATIONS
- Voltage rating:125V AC/DC
  - Current rating:1A AC/DC
  - Withstanding Voltage:500V AC/minute
  - Temperature range:-40°C~+125°C
  - Insulation resistance:≥100MΩ
  - Contact resistance:≤20mΩ
  - After environmental testing:≤40mΩ

PART NO.:


X1002 H-XX-A-N0 HF  
 ① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:H-HSG
- ③Row No.Pin No.XX-02P-20P
- ④Plug the Pin & Special No:A-Ultra-thin
- ⑤Material:N0-PA66 94V-0
- ⑥HF-Halogen Free

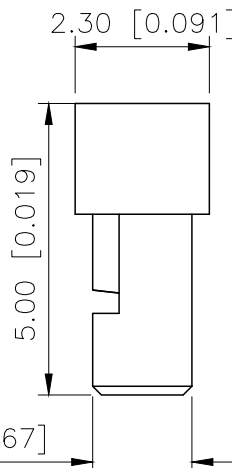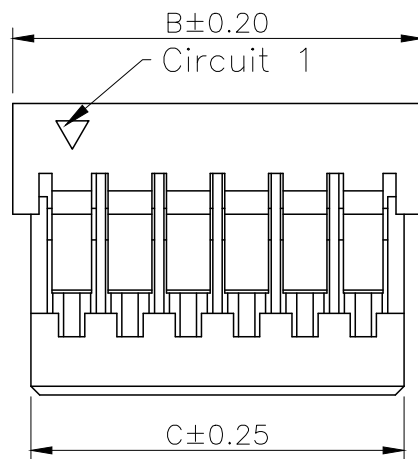

1.70 [0.067]

Poles	Dimensions/mm			Poles	Dimensions/mm		
	A	B	C		A	B	C
02	1.00	3.00	2.40	12	11.00	13.00	12.40
03	2.00	4.00	3.40	13	12.00	14.00	13.40
04	3.00	5.00	4.40	14	13.00	15.00	14.40
05	4.00	6.00	5.40	15	14.00	16.00	15.40
06	5.00	7.00	6.40	16	15.00	17.00	16.40
07	6.00	8.00	7.40	17	16.00	18.00	17.40
08	7.00	9.00	8.40	18	17.00	19.00	18.40
09	8.00	10.00	9.40	19	18.00	20.00	19.40
10	9.00	11.00	10.40	20	19.00	21.00	20.40
11	10.00	12.00	11.40				

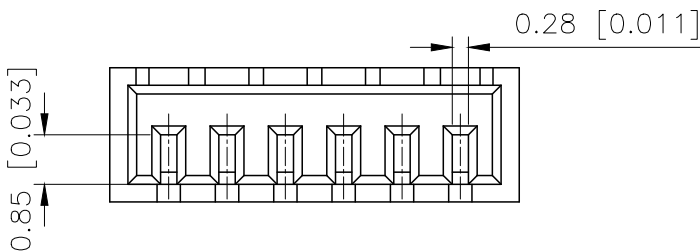

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.0mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X1002H-XXA-N0HF
APPROVED		SIZE:	A4	DWG NO.:	